Owner's Manual



2026 ODYSSEY

California Proposition 65 Warning

WARNING: Operating, servicing and maintaining a passenger vehicle or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P65Warnings.ca.gov/passengervehicle.

Event Data Recorders

This vehicle is equipped with an event data recorder (EDR). The main purpose of an EDR is to record, in certain crash or near crash-like situations, such as an air bag deployment or hitting a road obstacle, data that will assist in understanding how a vehicle's systems performed. The EDR is designed to record data related to vehicle dynamics and safety systems for a short period of time, typically 30 seconds or less. The EDR in this vehicle is designed to record such data as:

- How various systems in your vehicle were operating;
- Whether or not the driver and passenger safety belts were buckled/fastened;
- How far (if at all) the driver was depressing the accelerator and/or brake pedal; and,
- How fast the vehicle was traveling.

These data can help provide a better understanding of the circumstances in which crashes and injuries occur. NOTE: EDR data are recorded by your vehicle only if a non-trivial crash situation occurs; no data are recorded by the EDR under normal driving conditions and no personal data (e.g., name, gender, age, and crash location) are recorded. However, other parties, such as law enforcement, could combine the EDR data with the type of personally identifying data routinely acquired during a crash investigation.

To read data recorded by an EDR, special equipment is required, and access to the vehicle or the EDR is needed. In addition to the vehicle manufacturer, other parties, such as law enforcement, that have the special equipment, can read the information if they have access to the vehicle or the EDR.

The data belongs to the vehicle owner and may not be accessed by anyone else except as legally required or with the permission of the vehicle owner.

Service Diagnostic Recorders

This vehicle is equipped with service-related devices that record information about powertrain performance. The data can be used to verify emissions law requirements and/or help technicians diagnose and solve service problems. It may also be combined with data from other sources for research purposes, but it remains confidential. Some diagnostic and maintenance information is uploaded to Honda upon vehicle start up.

California Perchlorate Contamination Prevention Act

The airbags, seat belt tensioners, and CR type batteries in this vehicle may contain perchlorate materials - special handling may apply. See *www.dtsc.ca.gov/hazardouswaste/perchlorate/*

As you read this manual, you will find information that is preceded by a **NOTICE** symbol. This information is intended to help you avoid damage to your vehicle, other property, or the environment.

System Updates Terms & Conditions

General

Your vehicle has an application that allows your 9-in. Color Touchscreen to automatically search for Honda software updates that are specific to your 9-in. Color Touchscreen and its connected devices (initially every one (1) week via Wi-Fi or every four (4) weeks via Telematics Control Unit (TCU)*, gueries may occur more or less frequently due to internet outages, retries, direct user action, WAP push from the server or a change in guery policy on the Honda servers). This application periodically transmits to our servers a limited amount of vehicle and device information (Vehicle Identification Number (VIN), the Model Type (MT) Identification Number, Hardware and Software Part Number, Serial Number, Software Version, preferred language, Internet Protocol (IP) address, Transaction Log (alert or update viewing, update download and installation, software status), etc.). When the application finds an update from the server, the application initially asks permission to download and install the update. Where available, in your settings menu you may elect to automatically download and install these updates or you may elect to manually update the system.

When your 9-in. Color Touchscreen searches our servers for updates or alerts, we will automatically provide you with the opportunity to update your devices or transmit the update or alert directly to your 9-in. Color Touchscreen. We will also maintain on our servers a log of the updates or alerts that are installed.

Your Personal Data

Should the aforementioned information transmitted to Honda constitute personal information in your region, please note that this information will be treated in strict accordance with the rules and regulations outlined in this notice as well as applicable data protection law.

The terms of our privacy notice are incorporated into these terms by reference and your use of system updates will be subject to the privacy notice. Our privacy notice sets out information about how we and any named third parties will process any personal data we collect from you or that you provide to us, via the application. For further details, see Honda's vehicle data privacy notice at:

- U.S.: https://www.honda.com/privacy/connected-productprivacy-notice
- Canada: https://www.honda.ca/privacy/vehicledata (English) https://www.honda.ca/fr/confidentialite/ politiquedeconfidentialité (French)

Honda collects, uses and stores your personal data for the reasons set out below:

- to deliver the system updates and related services to you;
- to allow us to improve and optimize the system updates products and services;
- to respond to user questions and complaints; and for internal record keeping.
- where necessary for Honda's legitimate interests, as listed below, and where our interests are not overridden by your data protection rights.
- as otherwise described in Honda's Privacy Notice and Vehicle Data Privacy Notice.

Protecting our legitimate business interests and legal rights includes, but is not limited to, use in connection with compliance, regulatory, auditing, legal claims (including disclosure of such information in connection with legal process or litigation) and other ethics and compliance reporting requirements.

Honda will also convert personal data into anonymous data and use it (normally on an aggregated statistical basis) for uses such as market research and analysis, to improve the system updates, to analyze trends, and to assess the success of software update releases. Aggregated personal information does not personally identify you or any other use of the system updates.

Honda may share this data with Honda's worldwide support organization or affiliated Honda companies or other third parties engaged by Honda for the purposes of rendering support services in connection with system support.

* Not available on all models

Software End User License Agreement

Your vehicle comes equipped with software, which is governed by the End User License Agreement in Owner's Manual, and which contains a binding arbitration clause. Please refer to the End User License Agreement for the terms and conditions governing your use of the installed software, as well as the applications, services, functions, and content provided through the software. Your use of the installed software will serve as your consent to the terms and conditions of the End User License Agreement.

You may opt out within 30 days of your initial use of the Software by sending a signed, written notice to HONDA at American Honda Motor Co., Inc., Honda Automobile Customer Service, Mail Stop CHI-5, 1919 Torrance Blvd., Torrance, CA 90501-2746.

Privacy Notice

This vehicle may share location and usage information. To manage this setting, visit at:

U.S.: https://mygarage.honda.com/s/vehicle-data-privacysettings?page=question

Canada: https://www.honda.ca/privacy/vehicledata (English) https://www.honda.ca/fr/confidentialite/ politiquedeconfidentialité (French)

To learn more about how we collect and use Personal Information including precise geolocation data, please read our Privacy Notice and Vehicle Data Privacy Notice, accessible at:

- U.S.: https://www.honda.com/privacy/connectedproduct-privacy-notice
- Canada: https://www.honda.ca/privacy/vehicledata (English) https://www.honda.ca/fr/confidentialite/ politiquedeconfidentialité (French)

A Few Words About Safety

Your safety, and the safety of others, is very important. And operating this vehicle safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on labels and in this manual. This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all the hazards associated with operating or maintaining your vehicle. You must use your own good judgment.

You will find this important safety information in a variety of forms, including:

- Safety Labels on the vehicle.
- Safety Messages preceded by a safety alert symbol A and one of three signal words: DANGER, WARNING, or CAUTION. These signal words mean:

You WILL be KILLED or SERIOUSLY HURT if you don't follow instructions.

WARNING

You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.

You CAN be HURT if you don't follow instructions.

- Safety Headings such as Important Safety Precautions.
- Safety Section such as Safe Driving.
- Instructions how to use this vehicle correctly and safely.

This entire book is filled with important safety information - please read it carefully.

This owner's manual should be considered a permanent part of the vehicle and should remain with the vehicle when it is sold.

The Navigation Manual is available online at *mygarage.honda.com* (U.S.) or *honda.ca* (Canada). **If you are the first registered owner of your vehicle, you may request a complimentary printed copy of the Navigation Manual within the first six months of vehicle purchase.** To request a copy, visit *mygarage.honda.com*. In Canada, please request a copy from your Honda dealer.

This owner's manual covers all models of your vehicle. You may find descriptions of equipment and features that are not on your particular model.

The images throughout this owner's manual (including the front cover) that depict features, equipment, Audio/Information screen details, and Meter screens are only examples and may not be representative of your particular model.

This owner's manual is for vehicles sold in the United States and Canada.

The information and specifications included in this publication were in effect at the time of approval for printing. Honda Motor Co., Ltd. reserves the right, however, to discontinue or change specifications or design at any time without notice and without incurring any obligation.

Safe Driving P. 35

For Safe Driving P. 36 Seat Belts P. 40 Airbags P. 53

➔ Instrument Panel P. 91

Indicators P. 92

Gauges and Driver Information Interface P. 110

Controls P. 123

Clock P. 124	Locking and Unlocking the Doors P. 125
Security System P. 162	Windows P. 165
Virrors P. 190	Seats P. 193

Features P. 243

Audio System P. 244	Audio System	Basic Operation P. 251
Rear Entertainment System*	P. 348	Customized Features P. 354
CabinTalk® P. 389		

Driving P. 391

Before Driving P. 392	Towing a Trailer P. 398
Parking Your Vehicle P. 499	Multi-View Rear Camera P. 508

Maintenance P. 515

Before Performing Maintenance P. 516Maintenance Minder™ P. 519Checking and Maintaining Wiper Blades P. 547Climate Control System Maintenance P. 563Cleaning P. 564

Handling the Unexpected P. 571

Tools P. 572	If a Tire Goes	Flat P. 573
Indicator Coming On/Blinking P. 591	Fuses P. 598	Emergency Towing P. 605
If You Cannot Close the Power Sliding Do	Refueling P. 610	


Information P. 615


Specifications P. 616 Warranty Coverages P. 623 Identification Numbers P. 618 Authorized Manuals P. 626

Contents


			- 7	Quick Poferance Cuide	
	Exhaust Gas Hazard P. 89			Quick Reference Guide	P. 8
Child Safety P. 71	Exhaust Gas Hazaru r. 89	Safety Labels P. 90	- '4h		
				Safe Driving	D 25
			- 'II' '		r. 55
Tailgate P. 142	Sliding Doors P. 153			Instrument Panel	P. 91
Moonroof P. 168	5	ound the Steering Wheel P. 170	- 'IL 'I		
Interior Convenience Items P. 210	Climate Control System P. 2	5	ΠP.		
				Controls	P. 123
Audio Error Messages P. 325	General Information on the Audio System		- Uhr		
<i>Bluetooth</i> [®] HandsFreeLink [®] P. 370	Refuel Recommend P. 387	CabinWatch®* P. 388	ેપા	Features	P. 243
				Driving	2 204
When Driving P. 404	Honda Sensing® P. 437	Braking P. 490		Driving	P. 391
Refueling P. 510	Fuel Economy and CO ₂ Emissions P. 513				
				Maintenance	P 515
Maintenance Under the Hood P. 527	Replacing Light Bulbs P. 540				
Checking and Maintaining Tires P. 551	Battery P. 560	Remote Transmitter Care P. 562			
Accessories and Modifications P. 569			fl	Handling the Unexpected	P. 571
Engine Does Not Start P. 582	If the Battery Is Dead P. 587	Overheating P. 589			
If You Cannot Unlock the Fuel Fill Door P.		5		Information	P. 615
In Case of Emergency or Vehicle Trouble F	P. 612				
				Index	
			<i></i>	Index	P. 629
Devices that Emit Radio Waves P. 619	Reporting Safety Defects P. 620	Emissions Testing P. 621			
Customer Service Information P. 627	Open Source License P. 628				


Visual Index

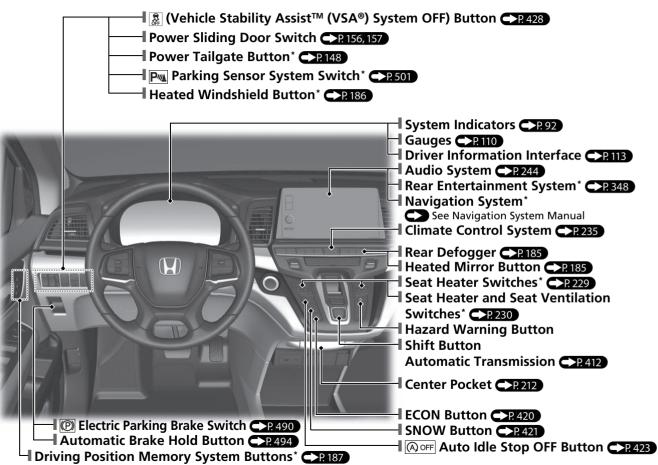

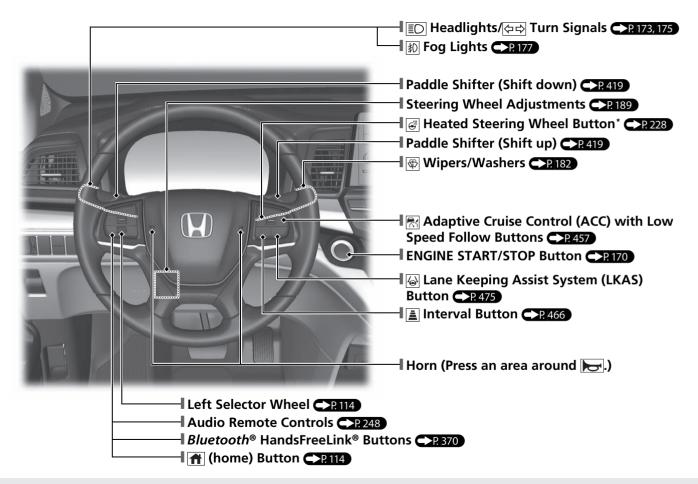



Visual Index

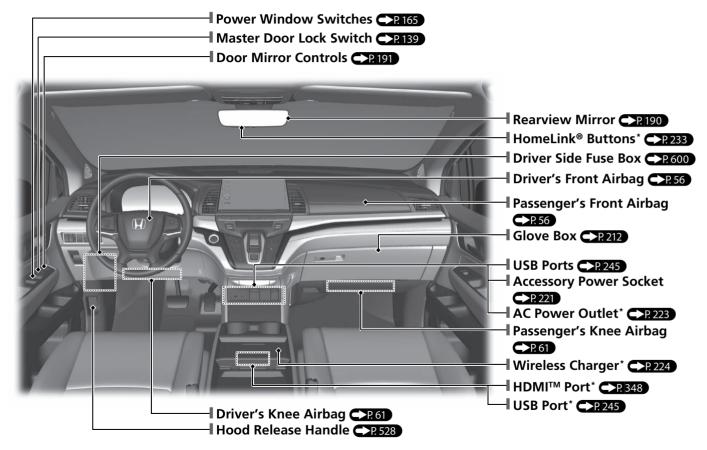

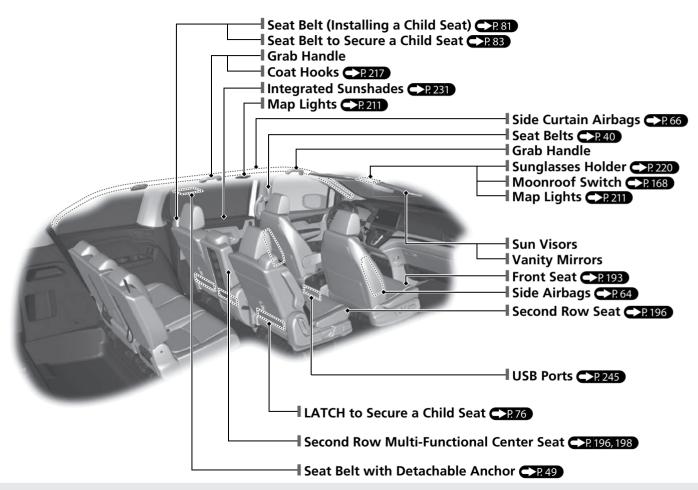


Visual Index

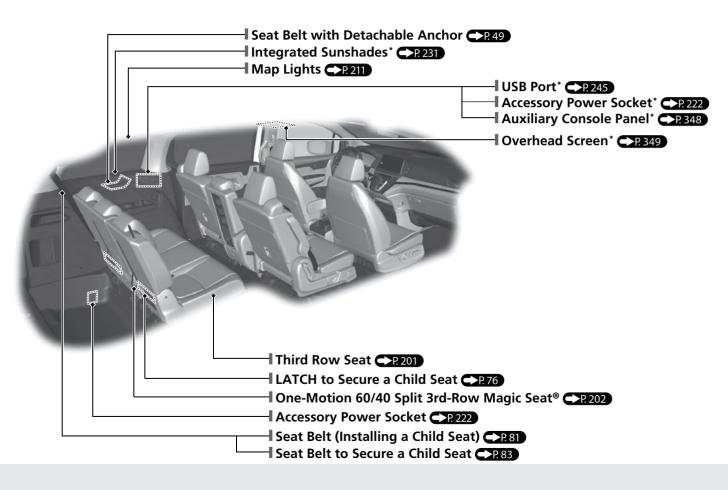

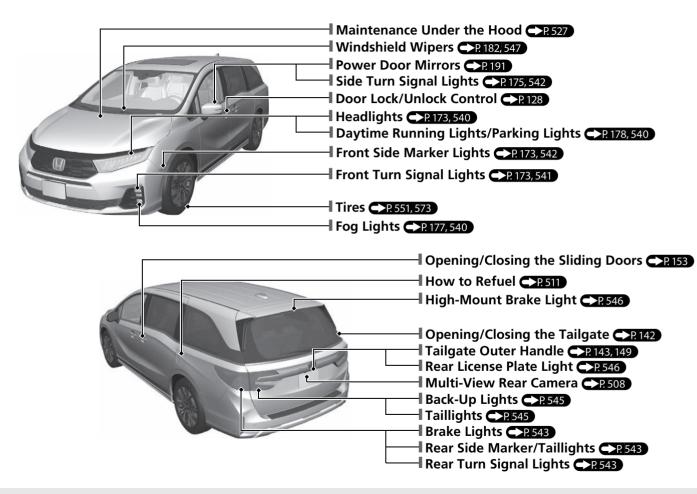

Auto Idle Stop Function

To improve fuel economy, the engine stops and then restarts as detailed below. When Auto Idle Stop is on, the Auto Idle Stop indicator (green) comes on.

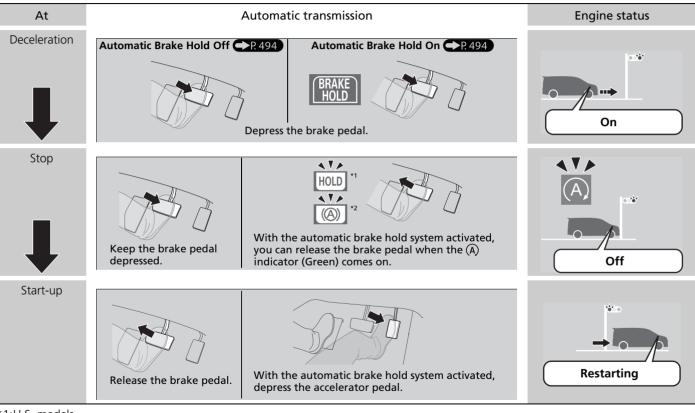


*1:U.S. models


*2:Canada models

Quick Reference Guide

Eco Assist[®] System C22420

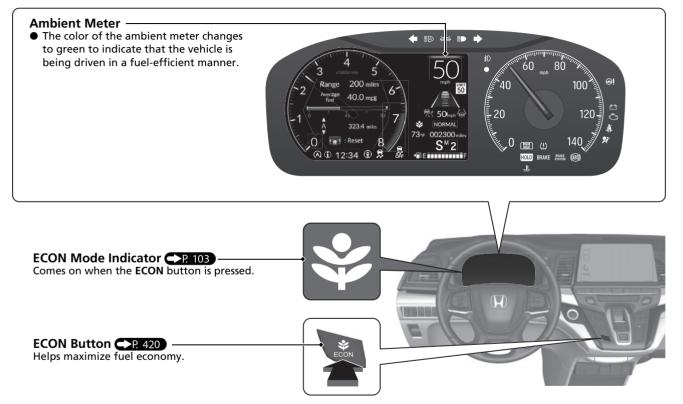

Safe Driving **CIED**

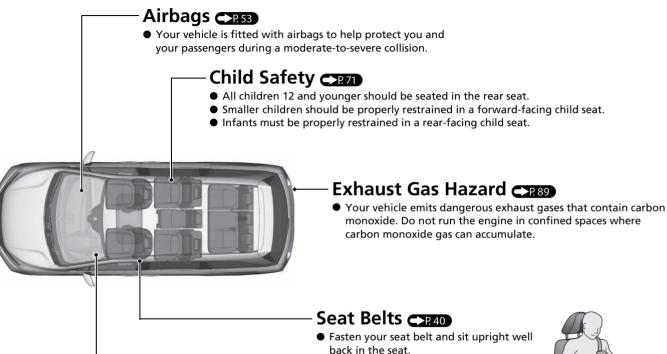

Before Driving Checklist


- Before driving, check that the front seats, head restraints, steering wheel, and mirrors have been properly adjusted.
- Check that your passengers are wearing their seat belts correctly.



Fasten your lap belt as low as possible.

Instrument Panel CIPD

Indicators (CR92)/Gauges (CR110)/Driver Information Interface (CR113)

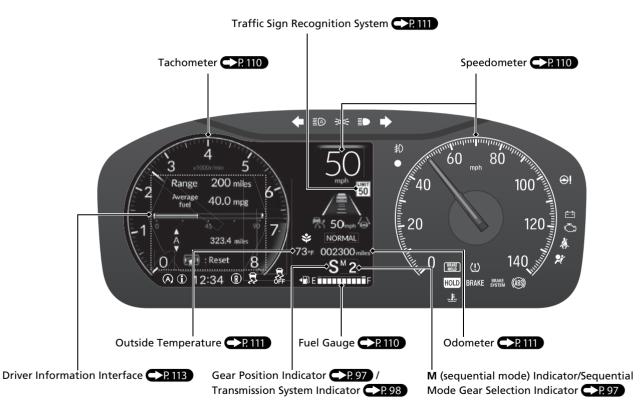


Controls CERES

To adjust time



To adjust date







Select System, then Date & Time.

Select Set Date & Time.

5 Select Automatic Date & Time, then select OFF.

6 Select Set Date or Set Time.

7 Adjust the dates, hours and minutes by selecting $\blacktriangle / \bigtriangledown$.

8 Select Save to set the date or time.

The clock is automatically updated through the audio system.

ENGINE START/STOP Button CR170

Press the button to change the vehicle's power mode.



Quick Reference Guide

Turn Signals

Turn Signal Control Lever






Light Control Switches



Wipers and Washers

P. 182

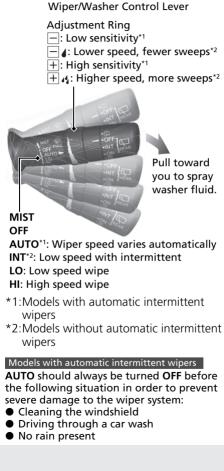

Steering Wheel CR189

To adjust, push the adjustment lever down, adjust to the desired position, then pull up the lever back in place.

> To adjust To lock

Lever

Unlocking the Front Doors from the Inside

►P. 138

Pull either front door inner handle to unlock and open it at the same time.



Power Sliding Door CP155

When the main switch is **ON**, the power sliding door opens and closes automatically when you press **OPEN** or **CLOSE** side of the $|_{1,2} / |_{2,1}$ switch.



Tailgate CR142

• Press the tailgate outer handle to unlock and open the tailgate when you carry the keyless remote.

Models with the power tailgate


- Press the power tailgate button on the instrument panel or the keyless remote to open and close the power tailgate.
- Press the tailgate inner button to close the power tailgate.




Tailgate Outer Handle

Models with Hands Free Access

Use a forward and back kicking motion for about 1 second under the center of the rear bumper to open or close the power tailgate while carrying the keyless remote.






Quick Reference Guide

Power Door Mirrors


₽. 191


- With the power mode in ON, move the selector switch to L or R.
- Push the appropriate edge of the adjustment switch to adjust the mirror.
- Press the folding button* to fold in and out the door mirrors.



Power Windows CR165

- With the power mode in ON, open and close the power windows.
- If the power window lock button is in the off position, each passenger's window can be opened and closed with its own switch.
- If the power window lock button is in the on position (indicator is on), each passenger's window switch is disabled.




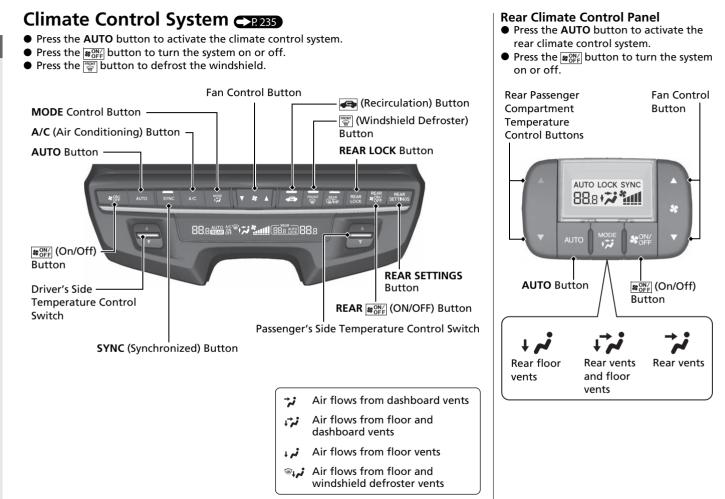

Features CIP243

Audio Remote Controls

₽. 248



- VOL+ / VOL- (Volume) Switch Press to adjust the volume up/down.
- [4] / [5] (Seek/Skip) Buttons Radio:


Press Press radio station. Press and hold to change the strong station. A wired connection, USB flash drive, Bluetooth® Audio, or Smartphone Connection:

Press I I by to skip to the beginning of the next song or return to the beginning of the current song. USB flash drive:

Press and hold / by to change a folder.


Left Selector Wheel

When selecting the audio mode Press the 1 (Home) button, then roll up or down to select **Audio** on the driver information interface, and then press the left selector wheel. Roll up or down: To cycle through the audio modes, roll up or down and then press the left selector wheel:

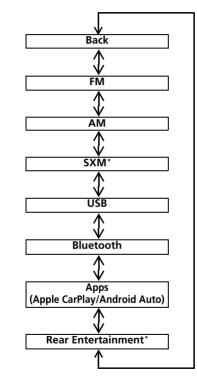

Audio System R 244, 251

For navigation system^{*} operation See the Navigation System Manual

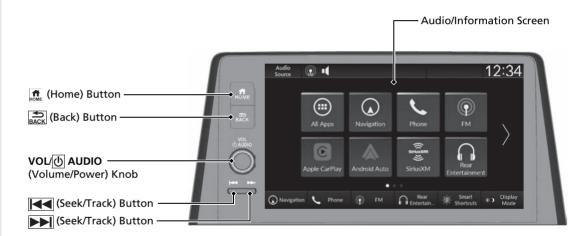

Driving CRESO

Automatic Transmission <->R412

Select $\ensuremath{\mathbb{P}}$ and depress the brake pedal when starting the engine. Shifting





Park Press

Press the P button. Used when parking or before turn off or start the engine. Transmission is locked.

R Reverse Press the

Ν

Press the R button. Used when reversing.

Neutral Press the N button.

Transmission is not locked.



Drive/S Position

Each time you press the D/S button, the mode switches between Drive and S Position mode.

Drive

- Normal driving (gears change between 1st and 10th automatically)
- Temporarily driving in the sequential mode

S Position

- Automatically changing gears between 1st and 8th (8th gear is used only at high speed)
- Driving in the sequential mode

Sequential Mode ► 419 ● Paddle shifters allow you to shift gears much like a manual transmission (1st through 10th). This is useful for engine braking. When the transmission is in D

Gear Position Indicator

- M (sequential mode) Indicator



Sequential Mode Gear Selection Indicator

Shift Down – Paddle Shifter





- Pulling a paddle shifter temporarily changes the mode from automatic mode to sequential mode. The selected gear number is displayed in the instrument panel. When the transmission is in S
- Pulling a paddle shifter changes the mode from automatic mode to sequential mode.
- The **M** (sequential mode) indicator and the selected gear number is displayed in the gauge. Shift Up +

CMBS[™] On and Off

► P. 444

- When a possible frontal collision is likely unavoidable, the Collision Mitigation Braking System[™] (CMBS[™]) can reduce the vehicle speed and the severity of the collision.
- The CMBS[™] is turned on every time you start the engine.
- To turn the CMBS[™] on or off, use the safety support of the driver information interface.

VSA[®] On and Off CR428

- The Vehicle Stability Assist™ (VSA®) system helps stabilize the vehicle during cornering and helps maintain traction while accelerating on loose or slippery road surfaces.
- VSA[®] comes on automatically every time you start the engine.

Tire Pressure Monitoring System (TPMS) with Tire Fill Assist CTRASO

- The TPMS monitors tire pressure.
- TPMS is turned on automatically every time you start the engine.
- TPMS fill assist provides audible and visual guidance during tire pressure adjustment.

Refueling CP. 510

Fuel recommendation: Unleaded gasoline, pump octane number 87 or higher Fuel tank capacity: 19.5 US gal (73.8 L)



Unlock the driver's door.

Press and release the rear edge of the fuel fill door to make it open slightly.

After refueling, wait for about five seconds before removing the filler nozzle. Wait for five seconds



Honda Sensing®

Assists with functions such as acceleration, braking, and steering in order to reduce the burden on the driver, as well as help avoid or reduce the severity of collisions.

Honda Sensing[®] has the following functions:

Collision Mitigation Braking System[™] (CMBS[™]) ◯ 1440

The system can assist you when it determines there is a possibility of your vehicle colliding with a vehicle or a pedestrian detected in front of your vehicle. The CMBS[™] is designed to alert you when the potential for a collision is determined, as well as to reduce your vehicle speed to help minimize collision severity when a collision is deemed unavoidable.



Road Departure Mitigation System (79.45)

Alerts and helps assist you when the system detects a possibility of your vehicle unintentionally crossing over detected lane markings and/or leaving the roadway altogether.

Adaptive Cruise Control (ACC) with Low Speed Follow CR456

Helps maintain a constant vehicle speed and a set following-interval behind a vehicle detected ahead of yours and, if the detected vehicle comes to a stop, can decelerate and stop your vehicle, without you having to keep your foot on the brake or the accelerator.

Lane Keeping Assist System (LKAS)

Provides steering input to help keep the vehicle in the middle of a detected lane and provides tactile and visual alerts if the vehicle is detected drifting out of its lane.

Traffic Sign Recognition System **PR482**

Reminds you of speed limit sign your vehicle has just passed through, showing it on the gauge.

Quick Reference Guide

Auto High-Beam CR179

The front sensor camera detects the light sources ahead of the vehicle such as the lights of a preceding or oncoming vehicle, or street lights. When you are driving at night, the system automatically switches the headlights between low beam and high beam depending on the situation.

Blind Spot Information System

Is designed to detect vehicles in specified alert zones adjacent to your vehicle, particularly in harder to see areas commonly known as "blind spots." When the system detects vehicles approaching from behind in adjacent lanes, the appropriate indicator comes on for a few seconds, providing assistance when you change lanes.

Cross Traffic Monitor

Monitors the rear corner areas using the radar sensors when reversing, and alerts you if a vehicle approaching from a rear corner is detected.

The system is convenient when you are backing out of a parking space.

Parking Sensor System*

The corner and center sensors monitor obstacles around your vehicle, and the beeper and the driver information interface, and audio/information screen let you know the approximate distance between your vehicle and the obstacle.

Maintenance **CREED**

Under the Hood 29.527

- Check engine oil, engine coolant, and windshield washer fluid. Add when necessary.
- Check brake fluid.
- Check the battery condition monthly.



Pull the hood release handle under the corner of the dashboard.



2

Locate the hood latch lever, pull it up, and then raise the hood. Once you have raised the hood slightly, you can release the lever.



When finished, close the hood and make sure it is firmly locked in place.

Wiper Blades CTR547 • When lifting the front wiper arms, move them into the maintenance position before lifting them. • Replace blades if they leave streaks across the windshield or become noisy. Lights CR540 Tires CIR551 • Inspect tires and wheels • Inspect all lights regularly. regularly.

- Check tire pressures regularly.
- Install snow tires for winter driving.



Handling the Unexpected CIER

Flat Tire CR573


• Park in a safe location and replace the flat tire with the compact spare tire under the floor between the front seats and the second row seats.



Indicators Come On

►P. 591

Identify the indicator and consult the owner's manual.




Engine Won't Start CR532

• If the battery is dead, jump start using a booster battery.



Blown Fuse **TR598**

• Check for a blown fuse if an electrical device does not operate.



Overheating **P**.589

• Park in a safe location. If you do not see steam under the hood, open the hood, and let the engine cool down.



Emergency Towing CREOS

• Call a professional towing service if you need to tow your vehicle.



What to Do If

Why does the brake pedal pulsate slightly when applying the brakes?



This can occur when the ABS activates and does not indicate a problem. Apply firm, steady pressure on the brake pedal. Never pump the brake pedal.

Anti-lock Brake System (ABS) P. 497

The rear door cannot be opened from inside the vehicle. Why?



Check if the childproof lock is in the lock position. If so, open the rear door with the outside door handle. To cancel this function, slide the lever up to the unlock position.





Why do the doors lock after I unlocked the doors?



If you do not open the doors within 30 seconds, the doors are relocked automatically for security.



Why does the beeper sound when I open the driver's door? The beeper sounds when:

- The power mode is in ACCESSORY.
- The exterior lights are left on.
- The Auto Idle Stop is in operation.



Why does a beeper sound when I walk away from the vehicle after I close the door?





Why does the beeper sound when I start driving?



The beeper sounds when the driver and/or front passenger are not wearing their seat belts.



Pulling the electric parking brake switch does not release the parking brake. Why?



Pull the electric parking brake switch with the brake pedal depressed.

I'm seeing an amber indicator of a tire with an exclamation point. What is that?



The Tire Pressure Monitoring System (TPMS) needs attention.

Check tire pressure.

Tire Pressure Monitoring System (TPMS) with Tire Fill Assist P. 430, 596



Depressing the accelerator pedal does not release the parking brake automatically. Why?

- Fasten the driver's seat belt.
- Check if the transmission is in P or N. If so, select any other position.



Why does the gear position automatically change to P when I open the driver's door to check for parking space lines when reversing?



- Fasten the driver's seat belt.
- Close the driver's door and manually change the gear position.

When opening the driver's door P.415



Why do I hear a screeching sound when I apply the brake pedal?



The brake pads may need to be replaced. Have your vehicle inspected by a dealer.

Safe Driving

You can find many safety recommendations throughout this chapter, and throughout this manual.

For Safe Driving

Important Safety Precautions	36
Your Vehicle's Safety Features	38
Safety CheckList	39
Seat Belts	
About Your Seat Belts	40
Fastening a Seat Belt	47
Seat Belt Inspection	52
Airbags	
Airbag System Components	53
Types of Airbags	56
Front Airbags (SRS)	56

Knee Airbags	61
Side Airbags	64
Side Curtain Airbags	66
Airbag System Indicators	67
Airbag Care	70
Child Safety	
Protecting Child Passengers	71
Safety of Infants and Small Children	73
Safety of Larger Children	87
Exhaust Gas Hazard	
Carbon Monoxide Gas	89

Safety Labels

The following pages explain your vehicle's safety features and how to use them properly. The safety precautions below are ones that we consider to be among the most important.

Important Safety Precautions

Always wear your seat belt

A seat belt is your best protection in all types of collisions. Airbags are designed to supplement seat belts, not replace them. So even though your vehicle is equipped with airbags, make sure you and your passengers always wear your seat belts, and wear them properly.

Restrain all children

Children ages 12 and under should ride properly restrained in a back seat, not the front seat. Infants and small children should be restrained in a child seat. Larger children should use a booster seat and a lap/shoulder seat belt until they can use the belt properly without a booster seat.

Be aware of airbag hazards

While airbags can save lives, they can cause serious or fatal injuries to occupants who sit too close to them, or are not properly restrained. Infants, young children, and short adults are at the greatest risk. Be sure to follow all instructions and warnings in this manual.

Don't drink and drive

Alcohol and driving don't mix. Even one drink can reduce your ability to respond to changing conditions, and your reaction time gets worse with every additional drink. So don't drink and drive, and don't let your friends drink and drive, either.

➢Important Safety Precautions

Some states, provinces, and territories prohibit the use of cell phones other than hands-free devices by the driver while driving.

■ Pay appropriate attention to the task of driving safely

Engaging in cell phone conversation or other activities that keep you from paying close attention to the road, other vehicles, and pedestrians could lead to a crash. Remember, situations can change quickly, and only you can decide when it is safe to divert some attention away from driving.

Control your speed

Excessive speed is a major factor in crash injuries and deaths. Generally, the higher the speed, the greater the risk, but serious injuries can also occur at lower speeds. Never drive faster than is safe for current conditions, regardless of the maximum speed posted.


■ Keep your vehicle in safe condition

Having a tire blowout or a mechanical failure can be extremely hazardous. To reduce the possibility of such problems, check your tire pressures and condition frequently, and perform all regularly scheduled maintenance.

Do not leave children unattended in the vehicle

Children, pets, and people needing assistance left unattended in the vehicle may be injured if they activate one or more of the vehicle controls. They may also cause the vehicle to move, resulting in a crash in which they and/or another person(s) can be injured or killed. Also, depending on the ambient temperature, the temperature of the interior may reach extreme levels, which can result in harm or death. Even if the climate control system is on, never leave them in the vehicle unattended as the climate control system can shut off at any time.

Your Vehicle's Safety Features

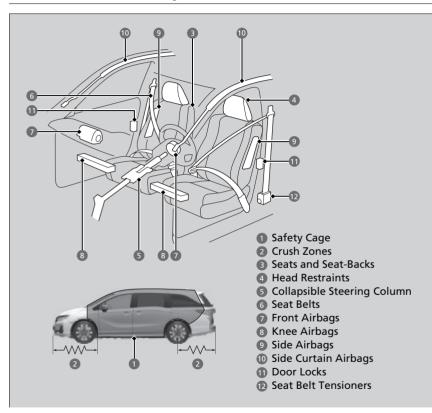

The following checklist will help you take an active role in protecting yourself and your passengers.

➢Your Vehicle's Safety Features

Your vehicle is equipped with many features that work together to help protect you and your passengers during a crash.

Some features do not require any action on your part. These include a strong steel framework that forms a safety cage around the passenger compartment, front and rear crush zones, a collapsible steering column, and tensioners that tighten the front seat belts in a sufficient crash.

However, you and your passengers cannot take full advantage of these features unless you remain seated in the correct position and always wear your seat belts. In fact, some safety features can contribute to injuries if they are not used properly.

Safety CheckList

For the safety of you and your passengers, make a habit of checking these items each time before you drive.

• After everyone has entered the vehicle, be sure all doors and the tailgate are closed and locked. Locking the doors and the tailgate helps prevent an occupant from being ejected and an outsider from unexpectedly opening a door or the tailgate.

Locking/Unlocking the Doors from the Inside P. 137

• Adjust your seat to a position suitable for driving. Be sure the front seats are adjusted as far to the rear as possible while allowing the driver to control the vehicle. Sitting too close to a front airbag can result in serious or fatal injury in a crash.

Deats P. 193

• Adjust head restraints to the proper position. Head restraints are most effective when the center of the head restraint aligns with the center of your head. Taller persons should adjust their head restraint to the highest position.

Adjusting the Front and Second Row Outer and Third Row Outer Head Restraints Positions P. 206

• Always wear your seat belt, and make sure you wear it properly. Confirm that any passengers are properly belted as well.

Fastening a Seat Belt P. 47

• Protect children by using seat belts or child seats according to a child's age, height, and weight.

Child Safety P. 71

Safety CheckList

If the door and/or tailgate open message appears on the driver information interface, a door and/or the tailgate is not completely closed. Close all doors and the tailgate tightly until the message disappears.



Seat Belts

About Your Seat Belts

Seat belts are the single most effective safety device because they keep you connected to the vehicle so that you can take advantage of many built-in safety features. They also help keep you from being thrown against the inside of the vehicle, against any passengers, or out of the vehicle. When worn properly, seat belts also keep your body properly positioned in a crash so that you can take full advantage of the additional protection provided by the airbags.

In addition, seat belts help protect you in almost every type of crash, including:

- frontal impacts
- side impacts
- rear impacts
- rollovers

Lap/shoulder seat belts

All eight seating positions are equipped with lap/shoulder seat belts with emergency locking retractors. In normal driving, the retractor lets you move freely while keeping some tension on the belt. During a collision or sudden stop, the retractor locks to restrain your body.

The front, second, and third row passenger's seat belts also have a lockable retractor for use with child seats.

Installing a Child Seat with a Lap/Shoulder Seat Belt P. 81

➢About Your Seat Belts

Not wearing a seat belt properly increases the chance of serious injury or death in a crash, even though your vehicle has airbags.

Be sure you and your passengers always wear seat belts and wear them properly.

If you extend the seat belt too quickly, it will lock in place. If this happens, slightly retract the seat belt, then extend it slowly.

Seat belts cannot completely protect you in every crash. But in most cases, seat belts can reduce your risk of serious injury.

Most states and all Canadian provinces and territories require you to wear seat belts.

Proper use of seat belts

Follow these guidelines for proper use:

- All occupants should sit upright, well back in the seat, and remain in that position for the duration of the trip. Slouching and leaning reduce the effectiveness of the belt and can increase the chance of serious injury in a crash.
- Never place the shoulder part of a lap/shoulder seat belt under your arm or behind your back. This could cause very serious injuries in a crash.
- Two people should never use the same seat belt. If they do, they could be very seriously injured in a crash.
- Do not put any accessories on the seat belts. Devices intended to improve comfort or reposition the shoulder part of a seat belt can reduce the protective capability and increase the chance of serious injury in a crash.

➢About Your Seat Belts

If a rear seat passenger moves around and extends the seat belt, the lockable retractor may activate. If this happens, release the retractor by unfastening the seat belt and allow the belt to retract completely. Then, refasten the belt.

Seat Belt Reminder



Front seats

The seat belt system includes an indicator on the instrument panel to remind the driver or a front passenger or both to fasten their seat belts.

If you set the power mode to ON and a seat belt is not fastened, a beeper will sound and the indicator will blink. After a few seconds, the beeper will stop and the indicator will come on and remain illuminated until the seat belt is fastened.

The beeper will periodically sound and the indicator will blink while the vehicle is moving until the seat belt is fastened.

Seat Belt Reminder

The indicator will also come on if a front passenger does not fasten their seat belt within six seconds after the power mode is set to ON.

When no one is sitting in the front passenger's seat, the indicator will not come on and the beeper will not sound.

The indicator also may not come on and the beeper may not sound when the occupant is not heavy enough to trigger the weight sensor. Such occupants (e.g., infants and smaller children) should be moved to the rear seat as a deploying front airbag likely will injure or kill them.

Protecting Child Passengers P. 71

The driver information interface uses colors to aid the driver in checking the status of the passengers. For the front seating positions:

- Green indicates the seat belt is fastened.
- An unfastened gray graphic indicates the seat belt is not fastened and an occupant has not been detected.
- An unfastened red graphic indicates the seat belt is unfastened and an occupant has been detected.



Rear seats

Your vehicle monitors rear seat belt use. The driver information interface notifies you if any of the rear seat belts are unfastened after they were previously fastened.

In order to encourage the driver to evaluate rear seat belt usage, the display appears when:

- Any of the rear passenger seat belts are unfastened when the power mode is set to ON.
- Any of the rear passengers unfasten their seat belt.

The seat belt reminder indicator blinks and the beeper sounds if any rear passenger seat belts are unfastened while driving.

To see the display:

Switching the Display P. 113

Seat Belt Reminder


The system will not detect a passenger in the rear seats who has not fastened the seat belt. The driver should check the status of the rear passengers' seat belts at the start of each trip and each time a passenger is seated in the rear seats, using the driver information interface as an aid. An alert will sound if a passenger in the rear seats unfastens the seat belt while the vehicle is in motion or if motion resumes while the graphic is red.

The driver information interface uses colors to aid the driver in checking the status of the passengers. For the rear seating positions:

- Green indicates the seat belt is fastened.
- An unfastened gray graphic indicates the seat belt has not been fastened recently.
- An unfastened red graphic indicates the seat belt was unfastened recently.

The system does not monitor harnesses that are part of a child seat, the anchors of the LATCH system, the installation of removable seats, or the anchor buckles of the second and third row center seat belts. While the system can inform you that a seat belt buckle is fastened, it cannot determine whether the seat is properly installed, the center seat belt anchors are in use, or if a child seat is properly installed or used.

Protecting Child Passengers P. 71



A transceiver is installed in second row removable seats to wirelessly communicate the seat belt fastening information to the vehicle. It will automatically connect to the vehicle whenever the seats is in or near its installation position.

Radio waves are transmitted to and from a transceiver in the removable seat in order to obtain the seat belt status.

In the following cases, the seat belt may be displayed as unfastened even if it is fastened:

- Strong radio waves are being transmitted by nearby equipment, such as a wireless phone charger.
- Telecommunications equipment, a laptop computer, cell phone, wireless device, or another high-powered electronic device is placed in, under, or close to the removable seat.
- A metallic object is covering all or part of the seats, or a large metallic object is placed in the cabin in a way that is blocking the vehicle's antennas from communicating with the transmitter in the seats.
- The battery in the transceiver dies.

Seat Belt Reminder

Electronic devices can create radio frequencies which interfere with the wireless seat belt reminder communication. If the system does not function as expected, please check that such items are not in, under or adjacent to the removable seat. Then turn the ignition off and then on again. If the malfunction continues, please see your dealer.

The transceiver has a specially designed coin-cell battery that needs to be replaced periodically. Battery life is about five years, but this varies depending on regularity of use.

The battery can be consumed whenever the seat transceiver is receiving strong radio waves. Avoid placing high powered electrical devices in or near the removable seat, such as gaming consoles or wireless chargers.

If the battery is low or the seat belt reminder is no longer working, please see your dealer to have the battery replaced.

CHEMICAL BURN HAZARD

The battery that powers the seat belt transceiver can cause severe internal burns and can even lead to death if swallowed. Keep new and used batteries away from children.

If you suspect that a child has swallowed the battery, seek medical attention immediately.



If the vehicle loses connection with any transceiver while the seat belt is fastened, the information for that seat will change to unfastened, and a "Seat belt reminder system problem" warning will be displayed. When any seat is not installed, please ensure that the seat belt does not remain fastened in order to prevent lost communication with the transceiver.

Automatic Seat Belt Tensioners

The front seats are equipped with automatic seat belt tensioners to enhance safety.

The tensioners automatically tighten the front seat belts during a moderate-tosevere frontal collision, sometimes even if the collision is not severe enough to inflate the front airbags or the knee airbags.



➢Automatic Seat Belt Tensioners


The seat belt tensioners can only operate once. If a tensioner is activated, the SRS indicator will come on. Have a dealer replace the tensioner and thoroughly inspect the seat belt system as it may not offer protection in a subsequent crash.

During a moderate-to-severe side impact, the tensioners on both sides of the vehicle also activate.

Fastening a Seat Belt

After adjusting a front seat to the proper position, and while sitting upright and well back in the seat:

Seats P. 193

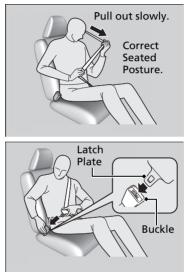

1. Pull the seat belt out slowly.

2. Insert the latch plate into the buckle, then tug on the belt to make sure the buckle is secure.

Make sure that the belt is not twisted or caught on anything.

Fastening a Seat Belt

No one should sit in a seat with an inoperative seat belt or one that does not appear to be working correctly. Using a seat belt that is not working properly may not protect the occupant in a crash. Have a dealer check the belt as soon as possible.

Never insert any foreign objects into the buckle or retractor mechanism.

If the seat belt appears to be locked in a fully retracted position, firmly pull out on the shoulder belt once, then push it back in.

Then, smoothly pull it out of the retractor and fasten. If you are unable to release the seat belt from a fully retracted position, do not allow anyone to sit in the seat, and take your vehicle to a dealer for repair.

About Your Seat Belts P. 40
 Seat Belt Inspection P. 52



- **3.** Position the lap part of the belt as low as possible across your hips, then pull up on the shoulder part of the belt so the lap part fits snugly. This lets your strong pelvic bones take the force of a crash and reduces the chance of internal injuries.
- **4.** If necessary, pull up on the belt again to remove any slack, then check that the belt rests across the center of your chest and over your shoulder. This spreads the forces of a crash over the strongest bones in your upper body.

➢Fastening a Seat Belt

Improperly positioning the seat belts can cause serious injury or death in a crash.

Make sure all seat belts are properly positioned before driving.

To release the belt, push the red **PRESS** button and then guide the belt by hand until it has retracted completely.

When exiting the vehicle, be sure the belt is properly stowed so that it will not get caught in the closing door.


➢Adjusting the Shoulder Anchor

The shoulder anchor height can be adjusted to four levels. If the belt contacts your neck, lower the height one level at a time.

After an adjustment, make sure that the shoulder anchor position is secure.


Adjusting the Shoulder Anchor

The front seats have adjustable shoulder anchors to accommodate taller and shorter occupants.



- **1.** Move the anchor up and down while pulling the shoulder anchor outward.
- **2.** Position the anchor so that the belt rests across the center of your chest and over your shoulder.

Seat Belt with Detachable Anchor



1. Pull out the seat belt's small latch plate and the latch plate from each holding slot in the ceiling.


- Second row seat Anchor Buckle Small Latch Plate Third row seat Small
- Third row seat Small Latch Plate Anchor Buckle

 Line up the triangle marks on the small latch plate and anchor buckle.
 Make sure the seat belt is not twisted.
 Attach the belt to the anchor buckle.

Seat Belt with Detachable Anchor

Using the seat belt with the detachable anchor unfastened increases the chance of serious injury or death in a crash.


Before using the seat belt, make sure the detachable anchor is correctly latched.

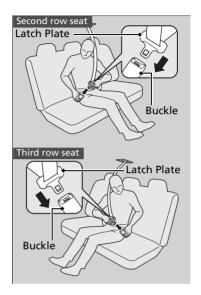

3. Insert the latch plate into the buckle. Properly fasten the seat belt the same way you fasten the lap/shoulder seat belt.


Seat Belt with Detachable Anchor

To unlatch the detachable anchor, insert the latch plate into the slot on the side of the anchor buckle.




Second row center seat

Pivot down the anchor buckle forward. Insert the latch plate into the slot on the back of the anchor buckle.



Advice for Pregnant Women

If you are pregnant, the best way to protect yourself and your unborn child when driving or riding in a vehicle is to always wear a seat belt and keep the lap part of the belt as low as possible across the hips.



Madvice for Pregnant Women

Each time you have a checkup, ask your doctor if it is okay for you to drive.

To reduce the risk of injuries to both you and your unborn child that can be caused by an inflating front airbag:

- When driving, sit upright and adjust the seat as far back as possible while allowing full control of the vehicle.
- When sitting in the front passenger's seat, adjust the seat as far back as possible.

Seat Belt Inspection

Regularly check the condition of your seat belts as follows:

- Pull each belt out fully, and look for frays, cuts, burns, and wear.
- Check that the latch plates and buckles work smoothly and the belts retract easily.
 - If a belt does not retract easily, cleaning the belt may correct the problem. Only use a mild soap and warm water. Do not use bleach or cleaning solvents. Make sure the belt is completely dry before allowing it to retract.

Any belt that is not in good condition or working properly will not provide proper protection and should be replaced as soon as possible.


A belt that has been worn during a crash may not provide the same level of protection in a subsequent crash. Have your seat belts inspected by a dealer after any collision.

Seat Belt Inspection

Not checking or maintaining seat belts can result in serious injury or death if the seat belts do not work properly when needed.

Check your seat belts regularly and have any problem corrected as soon as possible.

Airbag System Components

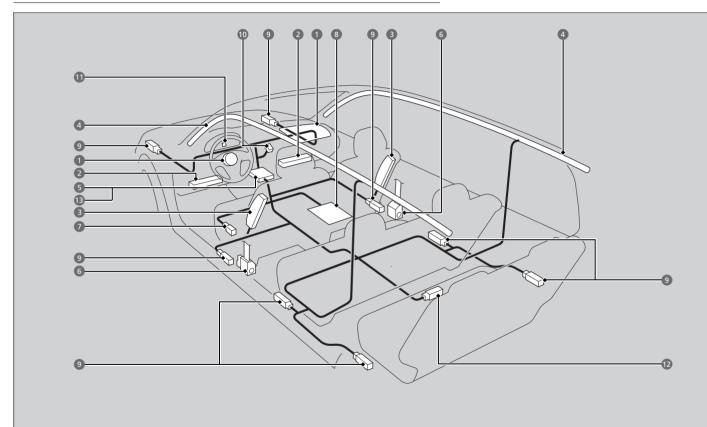

The front, driver's knee, front passenger's knee, side, and side curtain airbags are deployed according to the direction and severity of impact. Both side curtain airbags are deployed in a rollover. The airbag system includes:

- Two SRS (Supplemental Restraint System) front airbags. The driver's airbag is stored in the center of the steering wheel; the front passenger's airbag is stored in the dashboard. Both are marked SRS AIRBAG.
- Two knee airbags. The driver's knee airbag is stored under the steering column; the front passenger's knee airbag is stored under the glove box. Both are marked SRS AIRBAG.
- Two side airbags. One for the driver and one for the front passenger. The airbags are stored in the outer edges of the seatbacks. Both are marked SIDE AIRBAG.
- Two side curtain airbags, one for each side of the vehicle. The airbags are stored in the ceiling, above the side windows.

The front and rear pillars are marked **SIDE CURTAIN AIRBAG**.

- An electronic control unit that, when the power mode is in ON, continually monitors information about the various impact sensors, seat and buckle sensors, rollover sensor, airbag activators, seat belt tensioners, and other vehicle information. During a crash event, the unit can record such information.
- Automatic front seat belt tensioners. In addition, the driver's and front passenger's seat belt buckles incorporate sensors that detect whether or not the belts are fastened.
- Driver's seat position sensor. This sensor detects the driver's seat slide position to help determine the optimal deployment of the driver's airbag.
- Weight sensors in the front passenger's seat. The sensors are used for occupant classification to activate or deactivate the front passenger's airbag.

- Impact sensors that can detect a moderate-to-severe front or side impact.
- O An indicator on the dashboard that alerts you that the passenger's airbag has been turned off.
- An indicator on the instrument panel that alerts you to a possible problem with your airbag system or seat belt tensioners.

Safing Sensor

A rollover sensor that can detect if your vehicle is about to roll over and signal the control unit to deploy both side curtain airbags.

Important Facts About Your Airbags

Airbags can pose serious hazards. To do their job, airbags must inflate with tremendous force. So, while airbags help save lives, they can cause burns, bruises, and other minor injuries, sometimes even fatal ones if occupants are not wearing their seat belts properly and sitting correctly.

What you should do: Always wear your seat belt properly and sit upright and as far back from the steering wheel as possible while allowing full control of the vehicle. A front passenger should move their seat as far back from the dashboard as possible.

Remember, however, that no safety system can prevent all injuries or deaths that can occur in a severe crash, even when seat belts are properly worn and the airbags deploy.

Do not place hard or sharp objects between yourself and a front airbag.

Carrying hard or sharp objects on your lap, or driving with a pipe or other sharp object in your mouth, can result in injuries if your front airbag inflates.

Do not attach or place objects on the front, driver's knee, and front passenger's knee airbag covers. Objects on the covers marked SRS AIRBAG could interfere with the proper operation of the airbags or be propelled inside the vehicle and hurt someone if the airbags inflate.

➢Important Facts About Your Airbags

Do not attempt to deactivate your airbags. Together, airbags and seat belts provide the best protection.

When driving, keep hands and arms out of the deployment path of the front airbag by holding each side of the steering wheel. Do not cross an arm over the airbag cover.

Types of Airbags

Your vehicle is equipped with four types of airbags:

- Front airbags: Airbags in front of the driver's and front passenger's seats.
- Knee airbags: Airbags under the steering column and under the glove box.
- Side airbags: Airbags in the driver's and front passenger's seat-backs.
- **Side curtain airbags:** Airbags above the side windows. Each is discussed in the following pages.

The airbags can inflate whenever the power mode is in ON.

After an airbag inflates in a crash, you may see a small amount of smoke. This is from the combustion process of the inflator material and is not harmful. People with respiratory problems may experience some temporary discomfort. If this occurs, get out of the vehicle as soon as it is safe to do so.

Front Airbags (SRS)

The front SRS airbags inflate in a moderate-to-severe frontal collision to help protect the head and chest of the driver and/or front passenger.

SRS (Supplemental Restraint System) indicates that the airbags are designed to supplement seat belts, not replace them. Seat belts are the occupant's primary restraint system.

Housing Locations

The front airbags are housed in the center of the steering wheel for the driver, and in the dashboard for the front passenger. Both airbags are marked **SRS AIRBAG**.

➢Front Airbags (SRS)

During a frontal crash severe enough to cause one or both front airbags to deploy, the airbags can inflate at different rates, depending on the severity of the crash, whether or not the seat belts are latched, and/ or other factors. Frontal airbags are designed to supplement the seat belts to help reduce the likelihood of head and chest injuries in frontal crashes.

Operation

Front airbags are designed to inflate during moderate-to-severe frontal collisions. When the vehicle decelerates suddenly, the sensors send information to the control unit which signals one or both front airbags to inflate.

A frontal collision can be either head-on or angled between two vehicles, or when a vehicle crashes into a stationary object, such as a concrete wall.

How the Front Airbags Work



While your seat belt restrains your torso, the front airbag provides supplemental protection for your head and chest.

The front airbags deflate immediately so that they won't interfere with the driver's visibility or the ability to steer or operate other controls.

The total time for inflation and deflation is so fast that most occupants are not aware that the airbags deployed until they see them lying in front of them.

≥How the Front Airbags Work

Although the driver's and front passenger's airbags normally inflate within a split second of each other, it is possible for only one airbag to deploy. This can happen if the severity of a collision is at the margin, or threshold, that determines whether or not the airbags will deploy. In such cases, the seat belt will provide sufficient protection, and the supplemental protection offered by the airbag would be minimal. Safe Driving

When front airbags should not deploy

Minor frontal crashes: Front airbags were designed to supplement seat belts and help save lives, not to prevent minor scrapes, or even broken bones that might occur during a less than moderate-to-severe frontal crash.

Side impacts: Front airbags can provide protection when a sudden deceleration causes a driver or front passenger to move toward the front of the vehicle. Side airbags and side curtain airbags have been specifically designed to help reduce the severity of injuries that can occur during a moderate-to-severe side impact which can cause the driver or passenger to move toward the side of the vehicle.

Rear impacts: Head restraints and seat belts are your best protection during a rear impact. Front airbags cannot provide any significant protection and are not designed to deploy in such collisions.

Rollovers: In a rollover, your best form of protection is a seat belt or, if your vehicle is equipped with a rollover sensor, both a seat belt and a side curtain airbag. Front airbags, however, are not designed to deploy in a rollover as they would provide little, if any, protection.

■ When front airbags deploy with little or no visible damage

Because the airbag system senses sudden deceleration, a strong impact to the vehicle framework or suspension might cause one or more of the airbags to deploy. Examples include running into a curb, the edge of a hole, or other low fixed object that causes a sudden deceleration in the vehicle chassis. Since the impact is underneath the vehicle, damage may not be readily apparent.


When front airbags may not deploy, even though exterior damage appears severe

Since crushable body parts absorb crash energy during an impact, the amount of visible damage does not always indicate proper airbag operation. In fact, some collisions can result in severe damage but no airbag deployment because the airbags would not have been needed or would not have provided protection even if they had deployed.

Advanced Airbags

The airbags have advanced features to help reduce the likelihood of airbag related injuries to smaller occupants.





The driver's advanced airbag system includes a seat position sensor.

Based on information from this sensor and the severity of the impact, the advanced airbag system determines the optimal deployment of the driver's airbag.

The front passenger's advanced airbag system has weight sensors. The sensors are used for occupant classification to activate or deactivate the front passenger's airbag.

For adult size occupants, the system will automatically activate the front passenger's airbag. If a small adult sits in the front passenger seat and the system does not recognize him/her as an adult, see

Passenger Airbag Off Indicator P. 68

Advanced Airbags

If there is a problem with the driver's seat position sensor or the passenger's seat weight sensors, the SRS indicator will come on, and in the event of a crash, the airbag will deploy (regardless of the driver's seating position or passenger's occupant classification) with a force corresponding to the severity of the impact.

Supplemental Restraint System (SRS) Indicator P. 67

For the advanced front airbags to work properly, confirm that:

- The occupant is sitting in an upright position wearing the seat belt properly and the seat-back is not excessively reclined.
- The occupant is not leaning against the door or center console.
- The occupant's feet are placed on the floor in front of them.
- There are no objects hanging from the front passenger's seat.
- Only small, lightweight objects are in the seat-back pocket.
- The steering wheel and passenger's side dashboard are not obstructed by any object.
- No liquid has been spilled on or under the seat.
- There is no child seat or other object pressing against the rear of the seat or seat-back.
- There is no rear passenger pushing or pulling on the back of the front passenger's seat.

We advise against allowing a child age 12 or under to ride in the front passenger's seat. However, if you do allow a small child or infant to ride in the front passenger's seat, the system is designed to automatically deactivate the front passenger's airbag. Do not let a small child or infant ride in the front passenger's seat if the airbag does not automatically deactivate.

➢Advanced Airbags

- There are no objects placed under or beside the front passenger's seat. Improperly positioned objects can interfere with the advanced airbag sensors.
- The head restraint is not contacting the roof.
 Passenger Airbag Off Indicator P. 68
- The floor mat behind the front passenger's seat is hooked to the floor mat anchor. An improperly placed mat can interfere with the advanced airbag sensors.


Floor Mats P. 565

Knee Airbags

The knee SRS airbags inflate in a moderate-to-severe frontal collision to help keep the driver and/or front passenger in the proper position and to help maximize the benefit provided by the vehicle's other safety features.

SRS (Supplemental Restraint System) indicates that the airbags are designed to supplement seat belts, not replace them. Seat belts are the occupant's primary restraint system.

Housing Locations

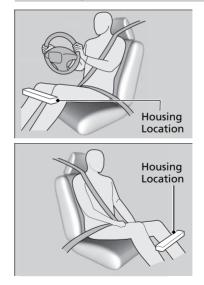

The knee airbag for the driver and the one for the front passenger are housed under the steering column and the glove box respectively.


Both are marked **SRS AIRBAG**

➢Knee Airbags

Do not attach accessories on or near a knee airbag as they can interfere with the proper operation of the airbag, or even hurt someone if the airbag inflates.

The driver and front passenger should not store any items under the seat or behind their feet. The items can interfere with proper airbag deployment in the event of a moderate to severe frontal collision and may result in inadequate protection.

Operation

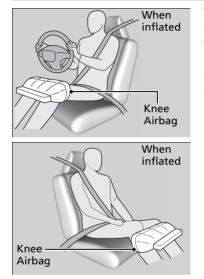

The driver's and front passenger's knee airbag deploy at the same time as the driver's and front passenger's airbag respectively.

Even if the collision is not severe enough to deploy the front airbag, the knee airbag may inflate alone.

When knee airbags deploy with little or no visible damage

Because the airbag system senses sudden deceleration, a strong impact to the vehicle framework or suspension might cause one or more of the airbags to deploy. Examples include running into a curb, the edge of a hole, or other low fixed objects that cause a sudden deceleration in the vehicle chassis. Since the impact is underneath the vehicle, damage may not be readily apparent.

■ When knee airbags may not deploy, even though exterior damage appears severe

Since crushable body parts absorb crash energy during an impact, the amount of visible damage does not always indicate proper airbag operation. In fact, some collisions can result in severe damage but no airbag deployment because the airbags would not have been needed or would not have provided protection even if they had deployed.

Side Airbags

The side airbags help protect the torso and pelvis of the driver or a front passenger during a moderate-to-severe side impact.

Housing Locations



The side airbags are housed in the outside edge of the driver's and passenger's seatbacks.

Both are marked **SIDE AIRBAG**.

Side Airbags

Make sure you and your front seat passenger always sit upright. Leaning into the path of a side airbag can prevent the airbag from deploying properly and increases your risk of serious injury.

Do not attach accessories on or near the side airbags. They can interfere with the proper operation of the airbags, or hurt someone if an airbag inflates.

Do not cover or replace the front seat-back covers without consulting a dealer.

Improperly replacing or covering front seat-back covers can prevent your side airbags from properly deploying during a side impact.

Operation



When the sensors detect a moderate-tosevere side impact, the control unit signals the side airbag on the impact side to immediately inflate.

When a side airbag deploys with little or no visible damage

Because the airbag system senses sudden acceleration, a strong impact to the side of the vehicle's framework can cause a side airbag to deploy. In such cases, there may be little or no damage, but the side impact sensors detected a severe enough impact to deploy the airbag.


When a side airbag may not deploy, even though visible damage appears severe

It is possible for a side airbag not to deploy during an impact that results in apparently severe damage. This can occur when the point of impact was toward the far front or rear of the vehicle, or when the vehicle's crushable body parts absorbed most of the crash energy. In either case, the side airbag would not have been needed nor provided protection even if it had deployed.

Side Curtain Airbags

The side curtain airbags help protect the heads of the driver and passengers in the outer seating positions during a moderate-to-severe side impact. The side curtain airbags equipped in this vehicle are also designed to help reduce the likelihood of partial and complete ejection of vehicle occupants through side windows in crashes, particularly rollover crashes.

Housing Locations



The side curtain airbags are located in the ceiling above the side windows on both sides of the vehicle.

Side Curtain Airbags


If the SRS control unit senses that your vehicle is about to rollover, it immediately deploys both side curtain airbags and activates both front seat belt tensioners.

If the impact is on the passenger's side, the passenger's side curtain airbag deploys even if there are no occupants on that side of the vehicle.

To get the best protection from the side curtain airbags, occupants should wear their seat belts properly and sit upright and well back in their seats.

Do not attach any objects to the side windows or roof pillars as they can interfere with the proper operation of the side curtain airbags.

Operation



The side curtain airbag is designed to deploy in a rollover or a moderate-to-severe side impact.

When side curtain airbags deploy in a frontal collision

One or both side curtain airbags may also inflate in a moderate-to-severe angled frontal collision.

Airbag System Indicators

If a problem occurs in the airbag system, the SRS indicator will come on and a message appears on the driver information interface.

Supplemental Restraint System (SRS) Indicator



■ When the power mode is set to ON The indicator comes on for a few seconds, then goes off. This tells you the system is working properly.


If the indicator comes on at any other time, or does not come on at all, have the system checked by a dealer as soon as possible. If you don't, your airbags and seat belt tensioners may not work properly when they are needed.

Supplemental Restraint System (SRS) Indicator

Ignoring the SRS indicator can result in serious injury or death if the airbag systems or tensioners do not work properly.

Have your vehicle checked by a dealer as soon as possible if the SRS indicator alerts you to a possible problem. Safe Driving

Passenger Airbag Off Indicator



When the passenger airbag off indicator comes on

The indicator comes on to alert you that the passenger's airbag has been turned off.

This occurs if the seat is empty or when the weight sensors determine that a small child or infant is on the passenger seat.

Children age 12 or under should always ride properly restrained in a back seat. Child Safety P. 71

If the indicator is on, in the event of a crash the passenger's airbag will not deploy. The passenger's knee airbag will not deploy, either.

When you set the power mode to ON, the indicator comes on and goes off a few seconds later to indicate that system checks are being performed. After that, the indicator comes on or off depending on the passenger's occupant classification.

■Passenger Airbag Off Indicator

To ensure the passenger is detected properly, confirm that:

- The occupant is sitting in an upright position wearing the seat belt properly and the seat-back is not excessively reclined.
- The occupant is not leaning against the door or center console.
- The occupant's feet are placed on the floor in front of them.
- There are no objects hanging from the front passenger's seat.
- Only small, lightweight objects are in the seat-back pocket.
- No liquid has been spilled on or under the seat.
- There is no child seat or other object pressing against the rear of the seat or seat-back.
- There is no rear passenger pushing or pulling on the back of the front passenger's seat.
- There are no objects placed under or beside the front passenger's seat. Improperly positioned objects can interfere with the advanced airbag sensors.
- The floor mat behind the front passenger's seat is hooked to the floor mat anchor. An improperly placed mat can interfere with the advanced airbag sensors.
- The head restraint is not contacting the roof.

Passenger Airbag Off Indicator

The passenger airbag off indicator may come on and go off periodically if the total weight on the seat is near the airbag cutoff threshold. For a small adult, depending on physique and posture, the system may not recognize him/her as an adult and thus deactivate the passenger's airbag.

If this occurs, please confirm that the conditions set forth in the above bullet points on the previous page are met.

If the above conditions are met and the indicator is still on, then with the transmission in $[\mathbf{P}]$, set the power mode to OFF and back to ON.

Have your vehicle checked by a dealer as soon as possible if:

- All of the above conditions are met, and the indicator comes on with an adult seated in the front passenger seat.
- The seat is empty and the indicator is off.
- The indicator does not come on and go off after setting the power mode to ON as described.
 Do not allow an adult passenger to ride in the front seat when the indicator is on.

Airbag Care

You do not need to, and should not, perform any maintenance on or replace any airbag system components yourself. However, you should have your vehicle inspected by a dealer in the following situations:

When the airbags have deployed

If an airbag has inflated, the control unit and other related parts must be replaced. Similarly, once an automatic seat belt tensioner has been activated, it must be replaced.

■ When the vehicle has been in a moderate-to-severe collision

Even if the airbags did not inflate, have your dealer inspect the following: the driver's seat position sensor, weight sensors in the passenger's seat, front seat belt tensioners, and each seat belt that was worn during the crash.

Do not remove or modify a front seat without consulting a dealer

This would likely disable or affect the proper operation of the driver's seat position sensor or the weight sensors in the passenger's seat. If it is necessary to remove or modify a front seat to accommodate a person with disabilities, contact a Honda dealer. For U.S. vehicles, contact American Honda Automobile Customer Service at 1-800-999-1009. For Canadian vehicles, contact Honda Canada Customer Relations at 1-888-9-HONDA-9.

➢Airbag Care

We recommend against the use of salvaged airbag system components, including the airbags, tensioners, sensors, and control unit.

Child Safety

Protecting Child Passengers

Each year, many children are injured or killed in vehicle crashes because they are either unrestrained or not properly restrained. In fact, vehicle crashes are the number one cause of death of children ages 12 and under.

To reduce the number of child deaths and injuries, every state and Canadian province and territory requires that infants and children be properly restrained when they ride in a vehicle.

Children should sit properly restrained in a rear seat. This is because:



- An inflating front airbag can injure or kill a child sitting in the front seat.
- A child in the front seat is more likely to interfere with the driver's ability to safely control the vehicle.
- Statistics show that children of all sizes and ages are safer when they are properly restrained in a rear seat.

➢Protecting Child Passengers

Children who are unrestrained or improperly restrained can be seriously injured or killed in a crash.

Any child too small for a seat belt should be properly restrained in a child seat. A larger child should be properly restrained with a seat belt, using a booster seat if necessary.

The National Highway Traffic Safety Administration and Transport Canada recommend that all children ages 12 and under be properly restrained in a rear seat. Some states or provinces/territories have laws restricting where children may ride.

- Never hold a child on your lap because it is impossible to protect them in the event of a collision.
- Never put a seat belt over yourself and a child. During a crash, the belt would likely press deep into the child and cause serious or fatal injuries.
- Never let two children use the same seat belt. Both children could be very seriously injured in a crash.
- Any child who is too small to wear a seat belt correctly must be restrained in an approved child seat that is properly secured to the vehicle using either the seat belt or the lower anchors of the LATCH system.
- Do not allow children to operate the doors, windows, or seat adjustments.
- Do not leave children in the vehicle unattended, especially in hot weather when the inside of the vehicle can get hot enough to kill them. They could also activate vehicle controls causing it to move unexpectedly.

➢Protecting Child Passengers

WARNING

Allowing a child to play with a seat belt or wrap one around their neck can result in serious injury or death.

Instruct children not to play with any seat belt and make sure any unused seat belt a child can reach is buckled, fully retracted, and locked.

To deactivate a lockable retractor, release the buckle and allow the seat belt to wind up all the way.

To remind you of the passenger's front airbag hazards and child safety, your vehicle has warning labels on the dashboard (U.S. models) and on the front visors. Please read and follow the instructions on these labels.

Safety Labels P. 90

Safety of Infants and Small Children

Protecting Infants

An infant must be properly restrained in a rear-facing child seat until the infant reaches the seat manufacturer's weight or height limit for the seat.



■ Positioning a rear-facing child seat Child seats must be placed and secured in a rear seating position.

When properly installed, a rear-facing child seat may prevent the driver or a front passenger from moving their seat all the way back, or from locking their seat-back in the desired position. Make sure that there is no contact between the child seat and the seat in front of it.

It can also interfere with proper operation of the passenger's advanced front airbag system.

Airbags P. 53

If this occurs, we recommend that you install the child seat directly behind the front passenger's seat, move the seat as far forward as needed, and leave it unoccupied. Or, you may wish to get a smaller rear-facing child seat.

➢Protecting Infants

Placing a rear-facing child seat in the front seat can result in serious injury or death during a crash.

Always place a rear-facing child seat in the rear seat, not the front.

Experts recommend use of a rear-facing seat for a child so long as the child's height and weight are appropriate for a rear-facing seat.

Infants should never be seated in a forward-facing position.


Always refer to the child seat manufacturer's instructions before installation.

Do not allow a front seat to rest against a child seat installed in a rear seating position.

The weight sensor in the front seat may not correctly detect the actual weight of the occupant.

Protecting Smaller Children

If a child has exceeded the weight and height limitations of a rear-facing child seat, the child should be properly restrained in a firmly secured forward-facing child seat until they exceed the weight and height limitations for the forward-facing child seat.



■ Forward-facing child seat placement We strongly recommend placing a forwardfacing child seat in a rear seating position.

Placing a forward-facing child seat in the front seat can be hazardous, even with advanced front airbags that automatically turn the passenger's front airbag off. A rear seat is the safest place for a child.

➢Protecting Smaller Children

Placing a forward-facing child seat in the front seat can result in serious injury or death if the front airbag inflates.

If you must place a forward-facing child seat in front, move the vehicle seat as far back as possible, and properly restrain the child.

Educate yourself about the laws and regulations regarding child seat use where you are driving, and follow the child seat manufacturer's instructions.

Selecting a Child Seat

Most child seats are LATCH-compatible (Lower Anchors and Tethers for Children). Some have a rigid-type connector while others have a flexible-type connector. Both are equally easy to use. Some existing and previously owned child seats can only be installed using the seat belt. Whichever type you choose, follow the child seat manufacturer's use and care instructions including recommended expiration dates as well as the instructions in this manual. Proper installation is key to maximizing your child's safety.

In seating positions and vehicles not equipped with LATCH, a LATCH-compatible child seat can be installed using the seat belt and a top tether for added security. This is because all child seats are required to be designed so that they can be secured with a lap belt or the lap part of a lap/shoulder belt. In addition, the child seat manufacturer may advise that a seat belt be used to attach a LATCH-compatible seat once a child reaches a specified weight. Please read the child seat owner's manual for proper installation instructions.

Important consideration when selecting a child seat

Make sure the child seat meets the following three requirements:

- The child seat is the correct type and size for the child.
- The child seat is the correct type for the seating position.
- The child seat is compliant with Federal Motor Vehicle Safety Standard 213 or Canadian Motor Vehicle Safety Standard 213.

Selecting a Child Seat

Installation of a LATCH-compatible child seat is simple.

LATCH-compatible child seats have been developed to simplify the installation process and reduce the likelihood of injuries caused by incorrect installation.

Installing a LATCH-Compatible Child Seat

A LATCH-compatible child seat can be installed in each of the second and third row seats except for the third row center. A child seat is attached to the lower anchors with either the rigid or flexible type of connectors.




Marks

1. Locate the lower anchors under the marks.

➢Installing a LATCH-Compatible Child Seat

Never attach two child seats to the same anchor. In a collision, one anchor may not be strong enough to hold two child seat attachments and may break, causing serious injury or death.

For your child's safety, when using a child seat installed using the LATCH system, make sure that the child seat is properly secured to the vehicle. A child seat that is not properly secured will not adequately protect a child in a crash and may cause injury to the child or other vehicle occupants.

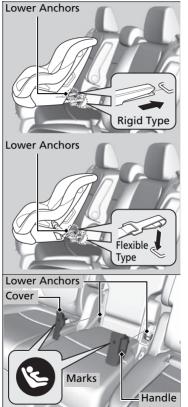

- **2.** Place the child seat on the vehicle seat, then attach the child seat to the lower anchors according to the instructions that came with the child seat.
 - When installing the child seat, make sure that the lower anchors are not obstructed by the seat belt or any other object.

➢Installing a LATCH-Compatible Child Seat


Using the outer third row seats' inner anchors to secure a LATCH-compatible child seat in the third row center seating position may result in failure of the child seat, causing injury or death.

Only use the outer third row seats' inner anchors to install a child seat in the third row center seating position if the manufacturer's instructions expressly permit.

Second row center seat To install a LATCH-compatible child seat in the second row center seat, remove the

the second row center seat, remove the covers on each lower end of the seat-back by pulling on the handles.



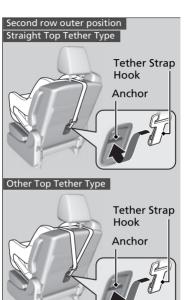

3. Raise the head restraint to its highest position, then route the tether strap outside/between the head restraint legs, and secure the tether strap hook to the anchor.

Make sure the strap is not twisted.


4. Tighten the tether strap as instructed by the child seat manufacturer.

➢Installing a LATCH-Compatible Child Seat

Installing a LATCH-compatible child seat in the third row center seat


Each outer third row seat is equipped with a pair of lower anchors which are used to secure a LATCHcompatible child seat. The third row center seat, however, is not equipped with anchors of any kind. The inner and outer anchors are spaced apart at a standard distance of 11 inches (280 mm). The distance between the two inner anchors is 16.0 inches (406.2 mm).

LATCH-compatible restraint systems that are fitted with rigid-type attachments cannot be installed in the third row center seat. However, a system fitted with flexible-type attachments can be installed in the third row center seat, provided that the manufacturer's instructions for that system permit the use of the inner anchors with the stated spacing. Before seating a child, make sure that the system is properly attached to both the lower anchors and tether anchors.

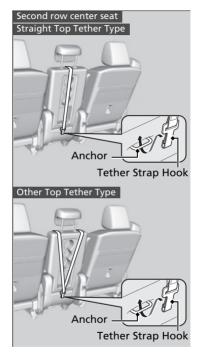

5. Make sure the child seat is firmly secured by rocking it forward and back, and side to side; little movement should be felt.



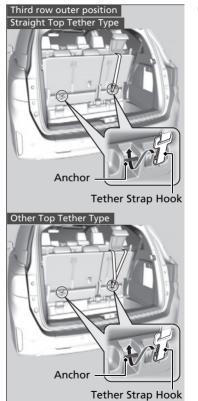

6. Make sure any unused seat belt that a child can reach is buckled, the lockable retractor is activated, and the belt is fully retracted and locked.

Protecting Child Passengers P. 71

Installing a Child Seat with a Lap/Shoulder Seat Belt

A child seat can be installed with a lap/shoulder belt in any rear seat or, if absolutely necessary, the front passenger seat.





- **1.** Place the child seat on the vehicle seat.
- **2.** Route the seat belt through the child seat according to the seat manufacturer's instructions, and insert the latch plate into the buckle.
 - ▶ Insert the latch plate fully until it clicks.
- **3.** Slowly pull the shoulder part of the belt all the way out until it stops. This activates the lockable retractor.
- **4.** Let the seat belt retract a few inches and check that the retractor has switched modes by pulling on the webbing. It should not pull out again until it is reset by removing the latch plate from the buckle.
 - If you are able to pull the shoulder belt out, the lockable retractor is not activated. Slowly pull the seat belt all the way out, and repeat steps 3 – 4.

Installing a Child Seat with a Lap/Shoulder Seat Belt

A child seat that is not properly secured will not adequately protect a child in a crash and may cause injury to the child or other vehicle occupants.






- **5.** Grab the shoulder part of the seat belt near the buckle, and pull up to remove any slack from the lap part of the belt.
 - When doing this, place your weight on the child seat and push it into the vehicle seat.
- **6.** Make sure the child seat is firmly secured by rocking it forward and back and side to side; less than one inch of movement should occur near the seat belt.
- **7.** Make sure any unused seat belt that a child can reach is buckled, the lockable retractor is activated, and the belt is fully retracted and locked.

Installing a Child Seat with a Lap/Shoulder Seat Belt

To deactivate a lockable retractor, release the buckle and allow the seat belt to wind up all the way.

Adding Security with a Tether

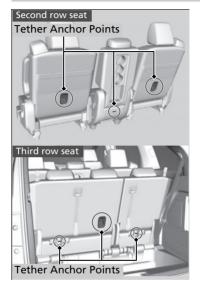


A tether anchor point is provided behind each second and third row seating position. If you have a child seat that comes with a tether but can be installed with a seat belt, the tether may be used for additional security.


1. Locate the appropriate tether anchor point.

Moding Security with a Tether

Always use a tether for forward-facing child seats whether using the seat belt or lower anchors.

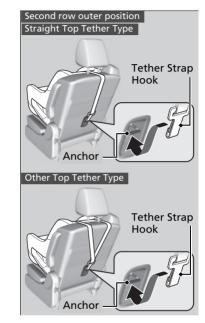


2. Raise the head restraint to its highest position, then route the tether strap outside/through the head restraint legs. Make sure the strap is not twisted.

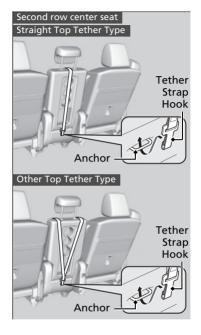

3. Secure the tether strap hook to the anchor.



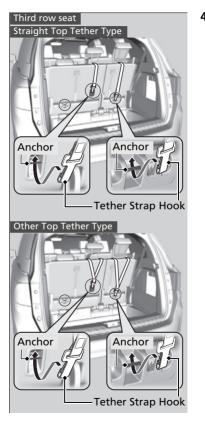

4. Tighten the tether strap as instructed by the child seat manufacturer.

Safety of Larger Children

Protecting Larger Children

The following pages give instructions on how to check proper seat belt fit, what kind of booster seat to use if one is needed, and important precautions for a child who must sit in front.

Checking Seat Belt Fit

When a child is too big for a child seat, secure the child in a rear seat using the lap/ shoulder seat belt. Have the child sit upright and all the way back, then answer the following questions.



Checklist

- Do the child's knees bend comfortably over the edge of the seat?
- Does the shoulder belt cross between the child's neck and arm?
- Is the lap part of the seat belt as low as possible, touching the child's thighs?
- Will the child be able to stay seated like this for the whole trip?

If you answer yes to all these questions, the child is ready to wear the lap/shoulder seat belt correctly. If you answer no to any question, the child needs to ride on a booster seat until the seat belt fits properly without a booster seat.

Safety of Larger Children

Allowing a child age 12 or under to sit in front can result in injury or death if the passenger's front airbag inflates.

If a larger child must ride in front, move the vehicle seat as far to the rear as possible, have the child sit up properly and wear the seat belt properly, and use a booster seat if needed.

Booster Seats



If a lap/shoulder seat belt cannot be used properly, position the child in a booster seat in the rear seat. For the child's safety, check that the child meets the booster seat manufacturer's recommendations.

Protecting Larger Children - Final Checks

Your vehicle has a rear seat where children can be properly restrained. If you ever have to carry a group of children, and a child must ride in front:

- Make sure you read and fully understand the instructions and safety information in this manual.
- Move the front passenger seat as far back as possible.
- Have the child sit upright and well back in the seat.
- Check that the seat belt is properly positioned so that the child is secure in the seat.

Monitoring child passengers

We strongly recommend that you keep an eye on child passengers. Even older, more mature children sometimes need to be reminded to fasten their seat belts and sit up properly.

Booster Seats

When installing a booster seat, make sure to read the instructions that came with it, and install the seat accordingly.

There are high- and low-type booster seats. Choose a booster seat that allows the child to wear the seat belt correctly.

Some U.S. states and Canadian provinces and territories require children to use a booster seat until they reach a given age or weight (e.g., 6 years or 60 lbs). Be sure to check current laws in the state, province, or territory where you intend to drive.

Carbon Monoxide Gas

The engine exhaust from this vehicle contains carbon monoxide, a colorless, odorless, and highly toxic gas. As long as you properly maintain your vehicle, carbon monoxide gas will not get into the interior.

Have the exhaust system inspected for leaks whenever

- The exhaust system is making an unusual noise.
- The exhaust system may have been damaged.
- The vehicle is raised for an oil change.

When you operate a vehicle with the tailgate open, airflow can pull exhaust gas into the interior and create a hazardous condition. If you must drive with the tailgate open, open all the windows and set the climate control system as shown below.

- **1.** Select the fresh air mode.
- 2. Select the 🞲 mode.
- 3. Set the fan speed to high.
- 4. Set the temperature control to a comfortable setting.

Adjust the climate control system in the same manner if you sit in your parked vehicle with the engine running.

■Carbon Monoxide Gas

Carbon monoxide gas is toxic.

Breathing it can cause unconsciousness and even kill you.

Avoid any enclosed areas or activities that expose you to carbon monoxide.


An enclosed area such as a garage can quickly fill up with carbon monoxide gas.

Do not run the engine with the garage door closed. Even when the garage door is open, drive out of the garage immediately after starting the engine.

Label Locations

These labels are in the locations shown. They warn you of potential hazards that can cause serious injury or death. Read these labels carefully.

If a label comes off or becomes hard to read (except for the U.S. dashboard label, which may be removed by the owner), contact a dealer for a replacement.

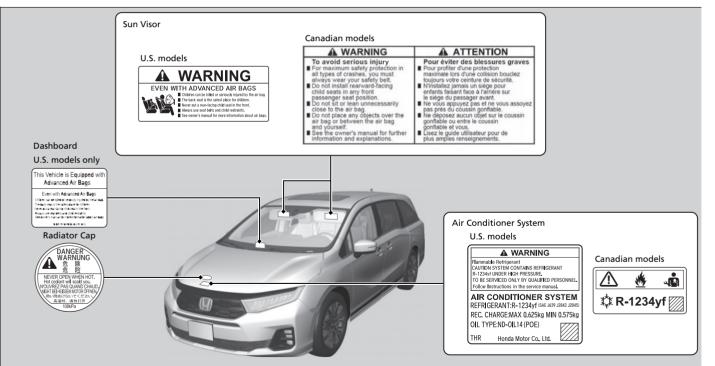

Instrument Panel

This chapter describes the buttons, indicators, and gauges that are used while driving.



Gauges	110
Driver Information Interface	113

Indicators come on/blink depending on the condition of the vehicle. Messages may display on the driver information interface at the same time. Please take the appropriate action outlined in the message, such as contacting a dealer.

BRAKE *1 U.S. (①) *1	Parking Brake and Brake System	→ P. 94	• • *1	Charging System Indicator	→ P. 97	(1) *1	Anti-lock Brake System (ABS) Indicator	→ P. 99
Canada	Indicator (Red)		D	Gear Position Indicator	→ P. 97	*1	Supplemental Restraint System Indicator	→ P. 99
BRAKE *1 SYSTEM U.S. (1) *1 Canada	Parking Brake and Brake System Indicator (Amber)	→ P. 96	^2	M (sequential mode) Indicator/Sequential Mode Gear Selection Indicator	→ P. 97		Electric Power Steering (EPS) System Indicator	→ P. 99
BRAKE HOLD *1	Automatic Brake Hold System Indicator	→ P. 96		Transmission System Indicator	→ P. 98	R *1	Vehicle Stability Assist™ (VSA®) System Indicator	→ P. 100
HOLD *1 U.S.	Automatic Brake Hold	→ P. 96	4	Seat Belt Reminder Indicator	→ P. 98	OFF *1	Vehicle Stability Assist [™] (VSA®) OFF Indicator	→ P. 100
Canada	Indicator	21.30		Low Fuel Indicator (Amber)	→ P. 98		Low Tire Pressure/TPMS Indicator	→ P. 100
*1	Malfunction Indicator Lamp	→ P. 97	~E . *1	Low Temperature Indicator	→ P. 99	* *	Turn Signal and Hazard Warning Indicators	→ P. 101

*1: When you set the power mode to ON, these indicators come on to indicate that system checks are being performed. They go off a few seconds later or after the engine has started. If an indicator does not come on or turn off, there may be a malfunction in the corresponding system. To resolve the issue, follow the instructions in the owner's manual.

-30 0 5	Lights On Indicator	→ P. 101	Í	System Message Indicator	→ P. 103	*1	Adaptive Cruise Control (ACC) with Low Speed	→ P. 106
	High Beam Indicator	→ P. 101	` (•)	Cruise Mode Indicator (White/Green)	→ P. 106		Follow Indicator (Amber) Adaptive Cruise Control	
≣@ *1	Auto High-Beam Indicator	→ P. 101	(A)	Auto Idle Stop Indicator (Green)	→ P. 104	R	(ACC) with Low Speed Follow Indicator (White/ Green)	→ P. 106
朷	Fog Light Indicator	→ P. 101	(A) OFF	Auto Idle Stop OFF Indicator	→ P. 104	*1	Lane Keeping Assist System (LKAS) Indicator (Amber)	→ P. 106
*	ECON Mode Indicator	→ P. 103	(A) *1	Auto Idle Stop System Indicator (Amber)	→ P. 104		Lane Keeping Assist System (LKAS) Indicator (White/Green)	→ P. 106
NORMAL	NORMAL Mode Indicator	→ P. 103	(X)	Auto Idle Stop Suspend Indicator	→ P. 105	*1	Safety Support Indicator	→ P. 107
			0	Immobilizer System Indicator	→ P. 102		(Amber)	
SNOW	SNOW Mode Indicator	→ P. 103	0	Security System Alarm Indicator	→ P. 102		Safety Support Indicator (Green/Gray)	→ P. 109

*1: When you set the power mode to ON, these indicators come on to indicate that system checks are being performed. They go off a few seconds later or after the engine has started. If an indicator does not come on or turn off, there may be a malfunction in the corresponding system. To resolve the issue, follow the instructions in the owner's manual.

Indicator	Name	On/Blinking	Explanation
U.S. BRAKE Canada	Parking Brake and Brake System Indicator (Red)	 Comes on when the parking brake is applied, and goes off when it is released. 	 The beeper sounds and the indicator comes on if you drive with the parking brake applied. Comes on for about 15 seconds when you apply the electric parking brake while the power mode is in ACCESSORY or VEHICLE OFF, then goes off. Stays on for about 15 seconds when you set the power mode to VEHICLE OFF while the electric parking brake is applied, then goes off.
(Red)		• Comes on when the brake fluid level is low.	 Comes on while driving - Make sure the parking brake is released. Stop in a safe place and check the brake fluid level. What to do when the indicator comes on while driving P. 593

Indicator	Name	On/Blinking	Explanation
U.S. BRAKE Canada (Red)	Parking Brake and Brake System Indicator (Red)	• Comes on if there is a problem with the brake system.	 Comes on along with the ABS indicator - Have your vehicle checked by a dealer. ▶ If the Brake System Indicator (Red) Comes On or Blinks P. 593 Comes on along with the Parking Brake and Brake System Indicator (amber) - Immediately stop in a safe place. Contact a dealer for repair. The brake pedal becomes harder to operate. Depress the pedal further than you normally do. ▶ If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On P. 594 ▶ Blinks and the Parking Brake and Brake System Indicator (amber) comes on at the same time - There is a problem with the electric parking brake system. The parking brake may not be set. Avoid using the parking brake and have your vehicle checked by a dealer immediately. ▶ If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System. The parking brake may not be set. Avoid using the parking brake and have your vehicle checked by a dealer immediately.

Indicator	Name	On/Blinking	Explanation
U.S.		• Comes on if there is a problem with a system related to braking other than the conventional brake system.	• Comes on while driving - Avoid high speeds and sudden braking. Take the vehicle to a dealer immediately.
BRAKE SYSTEM Canada	Parking Brake and Brake System	 Comes on if there is a problem with the electric parking brake system and/or the automatic brake hold system. 	• Stays on constantly - Avoid using the parking brake and have your vehicle checked by a dealer immediately.
(Amber)	Indicator (Amber)	Comes on if there is a problem with the radar sensor.Indicator may come on temporarily when the Maximum Load Limit is exceeded.	 Make sure the total load is within the Maximum Load Limit. Maximum Load Limit P. 395 Stays on constantly - Have your vehicle checked by a dealer.
BRAKE HOLD	Automatic Brake Hold System Indicator	 Comes on when the automatic brake hold system is on. 	Automatic Brake Hold P. 494
U.S. HOLD Canada	Automatic Brake Hold Indicator	 Comes on when the automatic brake hold is activated. 	Automatic Brake Hold P. 494

Indicator	Name	On/Blinking	Explanation
ᡁ᠊ᢩ᠆ᡙ	Malfunction	• After you have set the power mode to ON, the vehicle performs system checks. However, if the readiness codes have not been set by that time, this indicator will blink five times and then go off.	 Readiness codes are part of the on-board diagnostics for the emissions control systems. Testing of Readiness Codes P. 621
·رر	الرر Indicator Lamp	Comes on if there is a problem with the emissions control systems.Blinks when a misfire in the engine's cylinders is detected.	If the Malfunction Indicator Lamp Comes On or Blinks P. 592
<u>-</u> +	Charging System Indicator	• Comes on when there is a problem with the charging system.	 Stop in a safe place and contact a dealer immediately. Checking the Battery P. 560 If the Charging System Indicator Comes On P. 592
D	Gear Position Indicator	• Indicates the current gear selection.	Shifting P. 412
[™] 2	M (sequential mode) Indicator/ Sequential Mode Gear Selection Indicator	• Comes on when the sequential mode is applied.	Sequential Mode P. 418

Indicator	Name	On/Blinking	Explanation
	Transmission System Indicator	• Blinks if the transmission system has a problem.	 Have your vehicle checked by a dealer immediately. Do not drive displays on the driver information interface - Immediately stop in a safe place and contact a dealer.
		• Blinks if you cannot select P due to a transmission system failure.	Set the parking brake when parking.Have your vehicle checked by a dealer immediately.
	Seat Belt Reminder Indicator	 Blinks and the beeper sounds for a few seconds if you are not wearing a seat belt when you set the power mode to ON, then the indicator comes on. If the front passenger is not wearing a seat belt, the indicator comes on a few seconds later. Comes on for a while when the rear seat belt is unfastened while the power mode in ON. Blinks while driving if you and/or any passenger has not fastened a seat belt. The beeper sounds and the indicator blinks at regular intervals. 	 The beeper stops and the indicator goes off when you and the passengers fasten their seat belts. Stays on after you and/or the passengers have fastened the seat belt(s) - A detection error may have occurred in the sensor. Have your vehicle checked by a dealer. Seat Belt Reminder P. 42
	Low Fuel Indicator	• Comes on when the fuel reserve is running low (approximately 2.9 U.S. gal./11.0 Liter left).	• Refuel your vehicle as soon as possible.
	(Amber)	• Blinks if there is a problem with the fuel gauge.	• Have your vehicle checked by a dealer.

Indicator	Name	On/Blinking	Explanation
<u>_اللہ</u>	Low Temperature Indicator	• Comes on when the engine coolant temperature is low.	• If the indicator stays on after the engine has reached normal operating temperature, there may be a problem with the temperature sensors. Have your vehicle inspected by a dealer.
(ABS)	Anti-lock Brake System (ABS) Indicator	• Comes on if there is a problem with the ABS.	 Stays on constantly - Have your vehicle checked by a dealer. With this indicator on, your vehicle still has normal braking ability but no anti-lock function. Anti-lock Brake System (ABS) P. 497
	Supplemental Restraint System Indicator	 Comes on if a problem with any of the following is detected: Supplemental Restraint System Side airbag system Side curtain airbag system Seat belt tensioner 	 Stays on constantly - Have your vehicle checked by a dealer.
•!	Electric Power Steering (EPS) System Indicator	• Comes on if there is a problem with the EPS system.	 Stays on constantly - Have your vehicle checked by a dealer. If the Electric Power Steering (EPS) System Indicator Comes On P. 595

Indicator	Name	On/Blinking	Explanation
		• Blinks when VSA [®] is active.	—
	Vehicle Stability Assist™ (VSA®) System Indicator	 Comes on if there is a problem with the VSA[®] system, brake assist system, hill start assist system, starting assist brake function, agile handling assist, or brake lighting system. 	 Stays on constantly - Have your vehicle checked by a dealer. Vehicle Stability Assist™ (VSA®), aka Electronic Stability Control (ESC), System P. 427 Hill start assist system P. 409 Brake Assist System P. 498 Starting Assist Brake Function P. 426 Agile Handling Assist P. 429
OFF	Vehicle Stability Assist™ (VSA®) OFF Indicator	 Comes on when you partially disable VSA[®]. 	SA® On and Off P. 428
		• Comes on if the tire pressure of any of the tires becomes low.	• Comes on while driving - Stop in a safe place, check tire pressures, and inflate the tire(s) if necessary.
(!)	Low Tire Pressure/ TPMS Indicator	• Blinks for about one minute, and then stays on if there is a problem with the TPMS with Tire Fill Assist, or when a compact spare tire is temporarily installed.	• Blinks and remains on - Have your vehicle checked by a dealer. If the vehicle is fitted with a compact spare, get your regular tire repaired or replaced and put back on your vehicle as soon as you can.

Indicator	Name	On/Blinking	Explanation
+	Turn Signal and Hazard Warning Indicators	Blinks when you operate the turn signal lever.Blinks along with all turn signals when you press the hazard warning button.	 Does not blink or blinks rapidly Replacing Light Bulbs P. 540
3 0 05	Lights On Indicator	• Comes on when the parking, tail, and other external lights are on.	Lights P. 173
Ī	High Beam Indicator	• Comes on when the high beam headlights are on.	—
ĒA	Auto High-Beam Indicator	• Comes on when all the operating conditions of the auto high-beam are met.	Auto High-Beam P. 179
钓	Fog Light Indicator	• Comes on when the fog lights are on.	Fog Lights P. 177

Instrument Panel

Indicator	Name	On/Blinking	Explanation
U.S.	Immobilizer System Indicator	• Blinks if the immobilizer system cannot recognize the key information.	 Blinks - You cannot start the engine. Set the power mode to VEHICLE OFF^{*1}, then select the ON mode again. Repeatedly blinks - The system may be malfunctioning. Have your vehicle checked by a dealer. Do not attempt to alter this system or add other devices to it. Electrical problems can occur.
U.S. * * * * * * * * * * * * *	Security System Alarm Indicator	• Blinks when the security system alarm has been set.	Security System Alarm P. 162

*1:Canadian models only: Apply and hold the brake pedal before selecting the ON mode.

Indicator	Name	On/Blinking	Explanation
*	ECON Mode Indicator	• Comes on when the ECON mode is on.	ECON Mode P. 420
NORMAL	NORMAL Mode Indicator	• Comes on when you set the Intelligent Traction Management mode to NORMAL .	Intelligent Traction Management P. 421
SNOW	SNOW Mode Indicator	• Comes on when you set the Intelligent Traction Management mode to SNOW .	Intelligent Traction Management P. 421
Í	System Message Indicator	• Comes on along with a beep when a problem is detected. A system message on the driver information interface appears at the same time.	 While the indicator is on, press the (home) button, and select Warnings to see the message again. Switching the Display P. 113 Refer to the Indicators information in this chapter when a system message appears on the driver information interface. Take the appropriate action for the message. The driver information interface will not return to the normal screen unless the warning is canceled, or the (home) button is pressed.

Indicator	Name	On/Blinking	Explanation
(A)	Auto Idle Stop Indicator (Green)	• Comes on when Auto Idle Stop is in operation. The engine automatically shuts off.	Auto Idle Stop P. 422
(A) OFF	Auto Idle Stop OFF Indicator	 Comes on when the Auto Idle Stop system has been turned off by the Auto Idle Stop OFF Button. 	Auto Idle Stop System ON/OFF P. 423
(A)	Auto Idle Stop System Indicator (Amber)	• Blinks if there is a problem with the Auto Idle Stop system.	• Have your vehicle checked by a dealer.

Indicator	Name	On/Blinking	Explanation
(A)	Auto Idle Stop Suspend Indicator	 Comes on while Auto Idle Stop is temporarily suspended in the following situations. 	_
		- Brake pedal is not fully pressed.	Depress the brake pedal firmly.
		- The transmission is in a position other than D.	Auto Idle Stop P. 422
		- System charging is prioritized.	
		- Climate control system is prioritized. - $\boxed{\mathbb{W}}$ is ON (indicator on).	
		 Engine coolant temperature is not in operating range. 	
		- The Intelligent Traction Management is set to SNOW .	 Auto Idle Stop P. 422 Intelligent Traction Management P. 421
		 The battery temperature is too low. Auto Idle Stop does not activate for some reason. 	Auto Idle Stop P. 422

Indicator	Name	On/Blinking	Explanation
Ada	Adaptive Cruise	• Comes on if there is a problem with ACC with Low Speed Follow.	• Comes on while driving - Have your vehicle checked by a dealer.
R	Control (ACC) with Low Speed Follow Indicator (Amber)	 Indicator may come on temporarily when the Maximum Load Limit is exceeded. ACC with Low Speed Follow has been automatically canceled. 	 Make sure the total load is within the Maximum Load Limit. Maximum Load Limit P. 395 Stays on constantly - Have your vehicle checked by a dealer.
2	Adaptive Cruise Control (ACC) with Low Speed Follow Indicator (White/Green)	 Lights up in white when you press the button. Lights up in green while the system is in operation. 	Adaptive Cruise Control (ACC) with Low Speed Follow P. 456
Ĩ)	Cruise Mode Indicator (White/ Green)	Lights up in white when you change to cruise mode.Lights up in green when you have set a speed for cruise control.	To Switch ACC with Low Speed Follow to Cruise Control P. 470
	Lane Keeping Assist System (LKAS) Indicator (Amber)	• Comes on if there is a problem with the LKAS.	• Stays on constantly - Have your vehicle checked by a dealer.
	Lane Keeping Assist System (LKAS) Indicator (White/Green)	Lights up in white when you press the LKAS button.Lights up in green when the LKAS is in operation.	Lane Keeping Assist System (LKAS) P. 472

Indicator	Name	On/Blinking	Explanation
	Safety Support Indicator (Amber)	 Comes on if there is a problem with the Road Departure Mitigation system, CMBS[™], or blind spot information system. 	• Stays on constantly - Have your vehicle checked by a dealer.
		 Indicator may come on temporarily when the Maximum Load Limit is exceeded. 	 Make sure the total load is within the Maximum Load Limit. Maximum Load Limit P. 395 Stays on constantly - Have your vehicle checked by a dealer.
		 Comes on when Road Departure Mitigation system and/or CMBS[™] shuts itself off. 	 Indicator may come on temporarily when passing through an enclosed space, such as a tunnel. The area around the radar sensor is blocked by dirt, mud, etc. Stop your vehicle in a safe place and wipe the debris off with a soft cloth. Indicator may take some time to go off after the radar sensor is cleaned. Have your vehicle checked by a dealer if the indicator does not go off even after you have cleaned the radar sensor. Radar Sensor P. 489

Indicator	Name	On/Blinking	Explanation
		 Comes on when Road Departure Mitigation system and/or CMBS[™] shuts itself off. 	 Stays on - The temperature inside the camera is too high. Use the climate control system to cool down the camera. The system activates when the temperature inside the camera cools down. Front Sensor Camera P. 487
	Safety Support Indicator (Amber)		 Stays on - The area around the camera is blocked by dirt, mud, etc. Stop your vehicle in a safe place and wipe the debris off with a soft cloth. Have your vehicle checked by a dealer if the indicator and message are still displayed even after you have cleaned the area around the camera. Front Sensor Camera P. 487 It may come on when the ambient conditions are dark, such as when driving in a tunnel, or at night, dawn, or dusk.

Indicator	Name	On/Blinking	Explanation
•	Safety Support Indicator (Amber)	 Comes on when mud, snow, or ice accumulates in the vicinity of the blind spot information system sensor. Comes on when the temperature of the blind spot information system sensor is high. 	 Comes on while driving - Something may be interfering with the blind spot information system sensor. Check the vicinity of the blind spot information system sensor and remove any obstacles. The system will return to normal when the temperature cools down. Blind Spot Information System P. 434
8	Safety Support Indicator (Green/ Gray)	 Lights up in green when Road Departure Mitigation system, CMBS[™], and blind spot information system are on. Lights up in green and gray when one or more of the systems above are off. Lights up in gray when all systems above are off. 	 Road Departure Mitigation System P. 451 Collision Mitigation Braking System™ (CMBS™) P. 440 Blind Spot Information System P. 434

Gauges

Gauges include the speedometer, fuel gauge, and other related indicators. They are displayed when the power mode is in ON.

Speedometer

Displays your driving speed in mph or km/h.

Tachometer

Shows the number of engine revolutions per minute.

Fuel Gauge

Displays the amount of fuel left in the fuel tank.

Speedometer

You can change the Speed/Distance units. Speed/Distance Units P. 121 Customized Features P. 354

Tachometer

You can turn the tachometer display on or off. Customized Features P. 354

■Fuel Gauge

NOTICE

You should refuel when the reading approaches \boxed{E} . Running out of fuel can cause the engine to misfire, damaging the catalytic converter.

After lightly refueling, or depending on your vehicle's condition, the actual amount of remaining fuel may differ from the fuel gauge reading.

Odometer

Shows the total number of miles or kilometers that your vehicle has accumulated.

Outside Temperature

Shows the outside temperature in Fahrenheit (U.S.) or Celsius (Canada).

■ Adjusting the outside temperature display

Adjust the temperature reading by up to $\pm 5^{\circ}$ F or $\pm 3^{\circ}$ C if the temperature reading seems incorrect.

Traffic Sign Recognition System

Shows certain detected traffic signs while driving.

If speed limit warning is activated, the sign icon blinks when the maximum speed of the traffic sign detected is exceeded by a threshold, when compared with the vehicle speed.

Traffic Sign Recognition System P. 482

➢Outside Temperature

The temperature sensor is in the front bumper. Road heat and exhaust from another vehicle can affect the temperature reading when your vehicle speed is less than 19 mph (30 km/h).

It may take several minutes for the display to be updated after the temperature reading has stabilized.

Mage Adjusting the outside temperature display

You can adjust the temperature reading. **2** Customized Features P. 354

■Traffic Sign Recognition System

The default speed limit warning threshold is the maximum speed of the traffic sign detected.

Current Mode for ACC with Low Speed Follow and the LKAS

Shows the current mode for ACC with Low Speed Follow and LKAS. Adaptive Cruise Control (ACC) with Low Speed Follow P. 456 Lane Keeping Assist System (LKAS) P. 472

Clock

Shows the clock.

≫Clock

You can adjust the time manually and change the clock display to show the 12 hour clock or 24 hour clock.

Dick P. 124

Driver Information Interface

The driver information interface shows information such as the estimated travelable distance and fuel economy of the vehicle. It also displays messages such as warnings and other helpful information.

When a warning message displays, please check the message and contact a dealer to have the vehicle inspected if necessary. Please refer to the pages below if the

Engine oil pressure low or Engine temperature too hot message is displayed.

If the Engine oil pressure low Warning Appears P. 591

Dverheating P. 589


Switching the Display

Press the m (home) button, then roll the left selector wheel to scroll to the content you want to see. Press the left selector wheel to see detailed information.

Switching the Display


You can add or delete the meter contents.

Gauge Display Settings P. 122

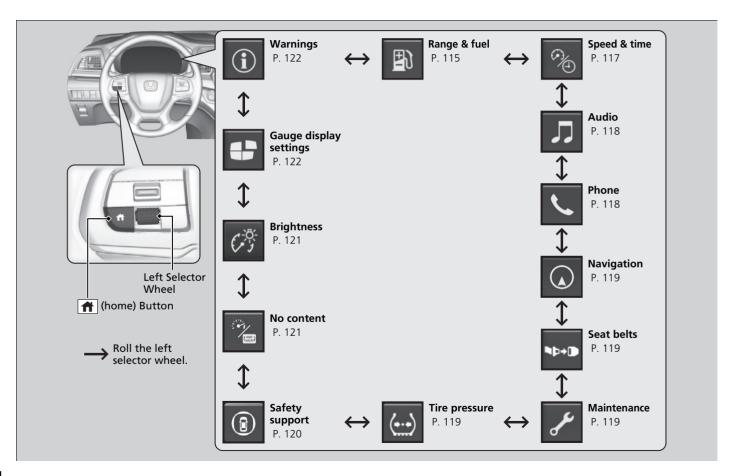

Range/Fuel/Trip Meter

Roll the left selector wheel to switch between trip meter A and trip meter B.

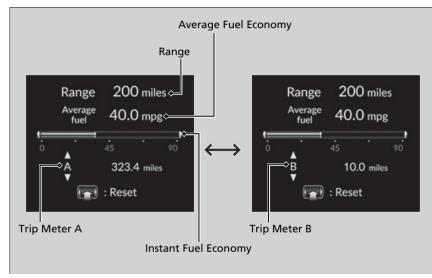

Trip meter

Shows the total number of miles or kilometers driven since the last reset. Meters A and B can be used to measure two separate trips.

Resetting a trip meter

To reset the trip meter, display it, press the left selector wheel, and then select

Reset.

► The trip meter is reset to 0.0.

Average Fuel Economy

Shows the estimated average fuel economy of each trip meter in mpg or I/100 km. The display is updated at set intervals. When a trip meter is reset, the average fuel economy is also reset.

■ Instant Fuel Economy

Shows the instant fuel economy as a bar graph in mpg or I/100 km.

Range

Shows the estimated distance you can travel on the remaining fuel. This estimated distance is based on the vehicle's current fuel economy.

➢Average Fuel Economy

You can change when to reset the average fuel economy.


Customized Features P. 354

≫Range

The driving range displayed is only an estimate and may differ from the actual distance the vehicle can travel.

Speed/Time/Trip Meter

Roll the left selector wheel to switch between trip meter A and trip meter B.

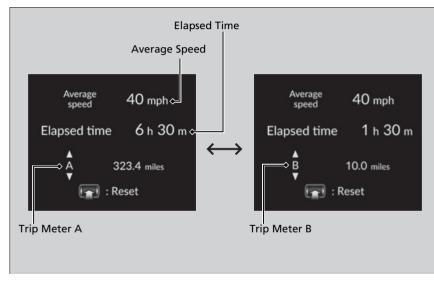

Trip meter Trip meter P. 116

Elapsed time

Shows the time elapsed since Trip A or Trip B was reset.



Average speed

Shows the average speed in mph or km/h since Trip A or Trip B was reset.

Audio

Shows the current audio information.

Audio System Basic Operation P. 251

Phone

Shows the current phone information.

➢Elapsed time

You can change when to reset the elapsed time. **D** Customized Features P. 354

➢Average speed

Navigation

Compass

Shows the compass screen.

Turn-by-Turn Directions

When driving guidance is provided by the navigation system^{*}, Android Auto, or Apple CarPlay, turn-by-turn directions to your destination appear.

Refer to the Navigation System Manual

Android Auto[™] P. 318

Apple CarPlay P. 311

Seat Belts

Occurs, under specified conditions, when seat belts are latched or unlatched. Seat Belt Reminder P. 42

Maintenance

Shows the remaining oil life and Maintenance Minder[™]. **Maintenance Minder[™]** P. 519

Tire Pressure Monitor

Shows each tire's pressure.

Tire Pressure Monitoring System (TPMS) with Tire Fill Assist P. 430

≫Navigation

Navigation features may not be available for all devices or apps.

Models with navigation system

You can control some navigation system functions on the driver information interface by scrolling the left selector wheel.


Refer to the Navigation System Manual

Safety Support

Indicates the status of the Road Departure Mitigation system, CMBS[™], and blind spot information system, such as On, Off, or Failure, by color and letters.

The following colors indicate the status of any of the above-mentioned systems:

- Green: The system is on.
- Gray: The system is off.
- Amber: There is a problem with the system.

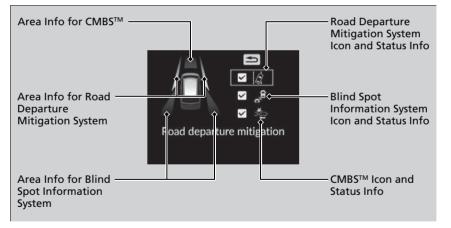

Safety Support

If a system is indicated by the color amber, have your vehicle checked by a dealer immediately.

To turn each system on or off, first rotate the left selector wheel to switch displays. From the next display, you can select which system to turn on or off.

- **Road Departure Mitigation System** P. 451
- Blind Spot Information System P. 434
- Collision Mitigation Braking System[™] (CMBS[™]) P. 440

You can also confirm the status of each function by the color of the safety support indicator.

 Safety Support Indicator (Amber) P. 107
 Safety Support Indicator (Green/Gray) P. 109

No Content

Tachometer P. 110

Speed/Distance Units

Enables you to show another unit on the driver information interface and audio/ information screen and set the displayed measurements to read in either miles and mph or km and km/h.

Press and hold the left selector wheel when you select **No content** on the driver information interface. Each time you do this, the unit will change from miles and mph to km and km/h or vice versa. After this, a confirmation screen will appear for a few seconds.

Brightness

Displays the adjustment for instrument panel brightness.

When the power mode is in ON, you can use the left selector wheel to adjust instrument panel brightness. **Brighten:** Roll the left selector wheel up.

Dim: Roll the left selector wheel down.

Press the left selector wheel to exit.

≫No Content

The tachometer can be turned on and off using the audio/information screen.

Customized Features P. 354

Even if you have turned off the tachometer on the audio/information screen, if **No content** is selected on the driver information interface, it will change to a tachometer-only display.

Switching the Display P. 113

Brightness

The brightness of the gauge is automatically adjusted depending on the ambient brightness.

- The brightness decreases when the ambient light is dark.
- The brightness increases when the ambient light is bright.

You can change the setting even when the ambient lighting is bright, but the brightness of the gauge won't change.

Gauge Display Settings

Arrange content

You can choose which icons to display on the home screen.

1. Roll the left selector wheel until Gauge

3. Roll the left selector wheel to scroll


wheel to check or uncheck them.

left selector wheel

2. Roll the left selector wheel

display settings is selected, then press the

between icons, then press the left selector

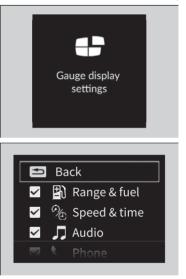

Warnings

You can check if there are any active warning messages.

Gauge Display Settings

Icons that are gray cannot be removed from the home screen.

When you customize settings, shift to **P**.

≫Warnings

If there are multiple warnings, you can roll the left selector wheel to see other warnings.

Controls

This chapter explains how to operate the various controls necessary for driving.

Clock
Key
Low Keyless Remote Signal Strength 127
Locking/Unlocking the Doors from the
Outside
Locking/Unlocking the Doors from the
Inside 137
Childproof Door Locks 140
Auto Door Locking/Unlocking
Tailgate142
Sliding Doors
Security System
Immobilizer System 162
Security System Alarm 162

Windows 1	65
Moonroof 1	
Operating the Switches Around the	
Steering Wheel	
ENGINE START/STOP Button1	70
Lights1	73
Auto High-Beam 1	79
Wipers and Washers 1	
Rear Defogger/Heated Door Mirror Button1	
Canadian models	
Heated Windshield Button 1	86
Driving Position Memory System* 1	87
Adjusting the Steering Wheel 1	89
Mirrors	
Interior Rearview Mirror 1	90

Power Door Mirrors	191
Seats	
Front Seats	193
Maintain a Proper Sitting Position	205
Head Restraints	206
Interior Convenience Items	210
Climate Control System	
Using Automatic Climate Control	235
Automatic Climate Control Sensors	241

* Not available on all models

Clock

Adjusting the Clock

You can adjust the time in the clock display with the power mode in ON.

Adjusting the Time

@ >>> s	iet Date			
	01	01	2024	
	V		$\mathbf{\nabla}$	
	Sav	e (Cancel	

🕸 >>>> Sel	t Time				
		12 Hour	:	34 Minute	РМ
	- 1	V	11	V	
	-	Save		Cancel	

- **1.** Press the 🟦 button.
- 2. Select General Settings.
- 3. Select System.
- 4. Select Date & Time.
- 5. Select Set Date & Time.
- 6. Select Automatic Date & Time, then select OFF.

To adjust date:

7. Select Set Date.
8. Select ▲ or ▼.
9. Select Save to set the date.

To adjust time:

- 7. Select Set Time.
- 8. Select ▲ or ▼.
 - AM/PM icon can be switched to each other either by directly touching the icon.
 - When you customize the clock display to 24 hour clock, AM/PM icon is not displayed.

How to Customize the General

Settings P. 354

9. Select Save to set the time.

Adjusting the Clock

The clock is automatically updated through the audio system.

You can also adjust the clock by touching the clock displayed on the header area of the audio/ information screen, clock displayed on the home screen, or () All Apps.

- 1. Touch the clock on the screen. The clock screen of the face-type appears.
- 2. Select Settings.
- 3. Select Date & Time.
- 4. Select Set Date & Time.
- 5. Select Automatic Date & Time, then select OFF.
- 6. Select Set Date or Set Time.
- 7. Adjusting the dates, hours, and minutes by selecting ▲ or ▼.
- 8. Select **Save** to set the date or time.

You can customize the clock display to show the 12 hour clock or 24 hour clock.


How to Customize the General Settings P. 354

You can customize the date display to **MM/DD/ YYYY**, **DD/MM/YYYY**, or **YYYY/MM/DD**.

How to Customize the General Settings P. 354

Key

This vehicle comes with the following keys:

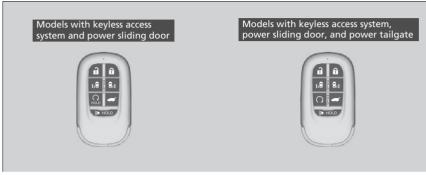

Use the keys to start and stop the engine, and lock and unlock all the doors, tailgate, and fuel fill door.

≫Key

All of the keys have an immobilizer system. The immobilizer system helps protect against vehicle theft.

Immobilizer System P. 162

Follow the advice below to prevent damage to the keys:

- Do not leave the keys in direct sunlight, or in locations with high temperature or high humidity.
- Do not drop the keys or set heavy objects on them.
- Keep the keys away from liquids, dust, or sand.
- Do not take the keys apart except to replace the battery.


If the circuits in the keys are damaged, the engine may not start, and the remote transmitter may not work.

If the keys do not work properly, have them inspected by a dealer.

You can remotely start the engine using the remote engine start.

Remote Engine Start P. 406

Built-in Key



Key Number Tag



The built-in key can be used to lock/unlock the doors when the keyless remote battery becomes weak and the power door lock/ unlock operation is disabled.

To remove the built-in key, push the release button and then pull out the key. To reinstall the built-in key, push the built-in key into the keyless remote until it clicks.

Contains a number that you will need if you purchase a replacement key.

≫Key Number Tag

Keep the key number tag separate from the key in a safe place outside of your vehicle. If you wish to purchase an additional key, contact a dealer.

If you lose your key and you cannot start the engine, contact a dealer.

Low Keyless Remote Signal Strength

The vehicle transmits radio waves to locate the keyless remote to start the engine, lock and unlock the all the doors and fuel fill door, tailgate, opening the power sliding door, and the power tailgate^{*}.

In the following cases, starting the engine, locking/unlocking the doors/fuel fill door, or opening the tailgate, power sliding door, and the power tailgate* may be inhibited, or operation may be unstable:

- Strong radio waves are being transmitted by nearby equipment.
- You are carrying the keyless remote together with telecommunications equipment, laptop computers, cell phones, or wireless devices.
- A metallic object is touching or covering the keyless remote.

➢Low Keyless Remote Signal Strength

Communication between the keyless remote and the vehicle consumes the keyless remote's battery. Battery life is about two years, but this varies depending on regularity of use.

The battery is consumed whenever the keyless remote is receiving strong radio waves. Avoid placing it near electrical appliances such as televisions and personal computers.

Locking/Unlocking the Doors from the Outside

Using the Keyless Access System



Door Lock Button

Lock Button

When you carry the keyless remote, you can lock/unlock the doors and fuel fill door, and open the tailgate.

You can lock/unlock the doors, fuel fill door, and tailgate within a radius of about 32 inches (80 cm) from the outside door handle or tailgate outer handle.

Locking the doors and tailgate

Press the door lock button on the front door or the tailgate.

Some exterior lights flash; the beeper sounds; all the doors, tailgate, and fuel fill door lock; and the security system sets.

≥Locking/Unlocking the Doors from the Outside

If the interior light switch is in the door activated position, the interior lights come on when you unlock the doors and tailgate.

No doors opened: The lights fade out after 30 seconds. Doors and tailgate relocked: The lights go off immediately.

Interior Lights P. 210


≥Using the Keyless Access System

If you do not open a door or the tailgate within 30 seconds of unlocking the vehicle with the keyless access system, the doors and tailgate will automatically relock.

You can lock or unlock doors using the keyless access system only when the power mode in VEHICLE OFF.

- Do not leave the keyless remote in the vehicle when you get out. Carry it with you.
- Even if you are not carrying the keyless remote, you can lock/unlock the doors and the tailgate while someone else with the remote is within range.
- The door may be unlocked if the door handle is covered with water in heavy rain or in a car wash if the keyless remote is within range.
- If you grip a door handle wearing gloves, the door sensor may be slow to respond or may not respond by unlocking the doors.
- After locking the door, you have up to 2 seconds during which you can pull the door handle to confirm whether the door is locked. If you need to unlock the door immediately after locking it, wait at least 2 seconds before gripping the handle, otherwise the door will not unlock.
- The door might not open if you pull it immediately after gripping the door handle. Grip the handle again and confirm that the door is unlocked before pulling the handle.

Unlocking the doors and tailgate



Grab the driver's door handle:

- The driver's door and fuel fill door unlocks.
- Some exterior lights flash twice and the beeper sounds twice.

Grab the front passenger's door or rear door handle:

- ► All doors and the tailgate unlock.
- Some exterior lights flash twice and the beeper sounds twice.

≥Using the Keyless Access System

- Even within the 32 inches (80 cm) radius, you may not be able to lock/unlock the doors and the tailgate with the keyless remote if it is above or below the outside handle.
- The keyless remote may not operate if it is too close to the door, door glass, and tailgate.

The light flash, beep and unlock settings can be customized.

How to Customize the Vehicle Settings P. 362

Models with power tailgate

You can also unlock and open the power tailgate. **D** Using the Tailgate Outer Handle P. 149


Please wipe off any residue such as car shampoo, groundwater, or anti-freeze in the vicinity of the outside door handle, as there is a risk that the keyless access system may not work properly.






Press the tailgate outer handle:

- ► The tailgate unlocks.
- Some exterior lights flash twice and the beeper sounds twice.
- Dening/Closing the Tailgate P. 143





■ Locking the doors and tailgate (Walk away auto lock[®])

When you walk away from the vehicle with all doors and tailgate closed while carrying the keyless remote, the doors, tailgate and fuel fill door will automatically lock. The auto lock function activates when all

doors and tailgate are closed or all doors are closed and tailgate begins power close operation*, and the keyless remote is within about 5 feet (1.5 m) radius of the outside door handle or tailgate outer handle. Exit vehicle while carrying the keyless remote

and close door(s) and tailgate. **1.** While within about 5 feet (1.5 m) radius of

- 1. While within about 5 feet (1.5 m) radius of the vehicle.
 - The beeper sounds; the auto lock function will be activated.
- **2.** Carry the keyless remote beyond about 5 feet (1.5 m) from the vehicle and remain outside this range for 2 or more seconds.
 - Some exterior lights flash; the beeper sounds; all doors and tailgate will then lock.

Locking the doors and tailgate (Walk away auto lock®)

The auto lock function is set to OFF as the factory default setting. The auto lock function can be set to ON using the audio/information screen. If you set the auto lock function to ON using the audio/information screen, only the remote transmitter that was used to unlock the driver's door prior to the setting change can activate auto lock.

How to Customize the Vehicle Settings P. 362

After the auto lock function has been activated, when you stay within the locking/unlocking operation range, the indicator on the keyless remote will continue to flash until the doors and tailgate are locked.

When you stay beside the vehicle within the operation range, the doors and tailgate will automatically lock approximately 30 seconds after the auto lock function activating beeper sounds.

When you open a door or tailgate after the auto lock function activating beeper sounds, the auto lock function will be canceled.

Under the following circumstances, the auto lock function will not activate:

- The keyless remote is inside the vehicle.
- ► The beeper will not sound.
- The keyless remote is taken out of its operational range before all doors and tailgate are closed.
- ▶The beeper will sound.

To temporarily deactivate the function:

- **1.** Set the power mode to OFF.
- 2. Open the driver's door.
- **3.** Using the master door lock switch, operate the lock as follows:

 $Lock \rightarrow Unlock \rightarrow Lock \rightarrow Unlock.$

The beeper sounds and the function is deactivated.

To restore the function:

- Set the power mode to ON.
- Lock the vehicle without using the auto lock function.
- With the keyless remote on you, move out of the auto lock function operation range.

Continued

• Open any door.

Locking the doors and tailgate (Walk away auto lock®)

Models with power tailgate

If equipped, the user must wait until the power tailgate fully closes before the auto lock function will be activated.

The auto lock function does not operate when any of the following conditions are met.

- The keyless remote is inside the vehicle.
- A door, tailgate, or the hood is not closed.
- The power mode is set to any mode other than OFF.
- The keyless remote is not located within a radius of about 5 feet (1.5 m) from the vehicle when you get out of the vehicle and close the doors and tailgate.


Auto lock function operation stop beeper

After the auto lock function has been activated, the auto lock operation stop beeper sounds for approximately two seconds in the following cases.

- The keyless remote is put inside the vehicle through a window.
- You are located too close to the vehicle.

• The keyless remote is put inside the tailgate. If the warning beeper sounds, check that you are carrying the keyless remote. Then, open/close a door and confirm the auto lock activation beeper sounds once.

Using the Remote Transmitter





Locking the doors and tailgate Press the lock button

Once:

Some exterior lights flash, all the doors, tailgate, and fuel fill door lock, and the security system sets.

Twice (within five seconds after the first push):

A beeper sounds and verifies the security system is set.

Unlocking the doors and tailgate

Press the unlock button.

Once:

Some exterior lights flash twice, and the driver's door and fuel fill door unlocks.

Twice:

► The remaining doors and the tailgate unlock.

■Using the Remote Transmitter

If you do not open a door or the tailgate within 30 seconds of unlocking the vehicle with the remote transmitter, the doors and tailgate will automatically relock.

You can change the relock timer setting.

How to Customize the Vehicle Settings P. 362

You can lock or unlock doors using the remote transmitter only when the power mode is in VEHICLE OFF.

The remote transmitter uses low-power signals, so the operating range may vary depending on the surroundings.

If the distance at which the remote transmitter works varies, the battery is probably low. If the LED does not come on when you press a button, the battery is dead.

Replacing the Remote Battery P. 562

You can customize the door unlock mode setting. How to Customize the Vehicle Settings P. 362

Locking/Unlocking the Doors Using a Key

If the lock or unlock button of the keyless remote does not work, use the key instead.



Fully insert the key and turn it.

Locking/Unlocking the Doors Using a Key


When you lock the driver's door with a key, all the other doors, tailgate, and fuel fill door lock at the same time. When unlocking, the driver's door unlocks first. Turning the key a second time within a few seconds does not unlock the remaining doors and the tailgate.

If you unlock a door with the built-in key while the security system is activated, the alarm will sound.

You can customize the door unlock mode setting. How to Customize the Vehicle Settings P. 362

Locking a Door Without Using a Key

If you do not have the key on you, or if for some reason you cannot lock a door using the key, you can lock the door without it.



Locking the front doors

Push the lock tab forward ① or push the master door lock switch in the lock direction2, and close the door.

Locking the rear doors


Slide the lock tab downward and close the door.

➢Locking a Door Without Using a Key

You can change the lockout protection operation setting.

How to Customize the Vehicle Settings P. 362

When you lock the driver's door, all the other doors, tailgate, and fuel fill door lock at the same time. Before locking a door, make sure that the key is not inside the vehicle.



Lockout protection function


If the vehicle cannot detect the keyless remote, lockout protection activates.

- A beeper sounds, some exterior lights flash, the doors unlock, and a message appears on the driver information interface.
- This allows you to open a door in case the keyless remote is still inside the vehicle.

If you do not open a door, all doors relock after 15 seconds.

To avoid non-detection, make sure to keep the keyless remote away from cell phones and other devices that may cause signal interference.

Lock Presetting



The vehicle will automatically lock after you lock the doors in advance then close the passenger's door, power sliding doors, and tailgate.

Activate lock presetting after closing any other doors besides the power sliding doors and tailgate.

- **1.** Press the door lock button on the driver's door or press the lock button on the remote transmitter.
 - Alert sounds and lock presetting is activated.
- 2. Close the power sliding doors or tailgate.
 - Some exterior lights flash and a beeper sounds when vehicle locks.

Make sure the doors and tailgate are locked before moving away from the vehicle.

➢Lock Presetting

Opening or closing the power sliding doors or power tailgate^{*} on someone's hands or fingers can cause serious injury. Make sure all hands and fingers, especially children's, are clear of the power sliding doors or power tailgate^{*}.

Lock presetting will be reset if a door or the tailgate is opened before the vehicle has locked completely.


Before locking a door, make sure that the key is not inside the vehicle.

You can turn this function on and off.

How to Customize the Vehicle Settings P. 362

Locking/Unlocking the Doors from the Inside

Using the Lock Tab



Front Locking a door

Push the lock tab forward.

Unlocking a door Pull the lock tab rearward.

■Using the Lock Tab

When you lock the door using the lock tab on the driver's door, all the other doors, tailgate, and fuel fill door lock at the same time.

When you unlock the door using the lock tab on the driver's door, only the driver's door will unlock.



Rear Locking a door

Slide the lock tab downward.

Unlocking a door Slide the lock tab upward.

Unlocking Using the Front Door Inner Handle



Pull the front door inner handle.

The door unlocks and opens in one motion.

▶ Unlocking Using the Front Door Inner Handle

The front door inner handles are designed to allow front seat occupants to open the door in one motion. However this feature requires that front seat occupants never pull a front door inner handle while the vehicle is in motion.

Children should always ride in a rear seat where childproof door locks are provided. Childproof Door Locks P. 140


Unlocking and opening the front door from the inner handle unlocks all the other doors.

To avoid all the doors unlocking, use the lock tab on the driver's door to unlock, then lock again before opening the door.

This setting works for one time only. If you do not want all the doors to be unlocked all the time, customize the Auto Door Unlock setting to OFF using the audio/information screen.

How to Customize the Vehicle Settings P. 362

Using the Master Door Lock Switch



Press the master door lock switch in as shown to lock or unlock all doors, tailgate, and fuel fill door. ≥Using the Master Door Lock Switch

When you lock/unlock either front door using the master door lock switch, all the other doors and the tailgate lock/unlock at the same time.

Childproof Door Locks

The childproof door locks prevent the rear doors from being opened from the inside regardless of the position of the lock tab.

Setting the Childproof Door Locks



Slide the lever in the rear door to the lock position, and close the door.

When opening the sliding door

Open the door using the outside door handle.

Childproof Door Locks



To open the door from the inside when the childproof door lock is on, put the lock tab in the unlock position, lower the rear window, put your hand out of the window, and pull the outside door handle.

The door pillar switches become disabled.

Dower Sliding Door Switches P. 157 You can open and close the power sliding door, using the power sliding door switches near the steering wheel, or the remote.

Auto Door Locking/Unlocking

Your vehicle locks and unlocks all doors and the tailgate automatically when a certain condition is met.

Auto Door Locking

Drive lock mode

All doors and the tailgate lock when the vehicle's speed reaches about 10 mph (15 km/h).

Auto Door Unlocking

Driver's door open mode

All doors and the tailgate unlock when the driver's door is opened.

➢Auto Door Locking/Unlocking

You can turn off or change to another auto door locking/unlocking setting using the audio/ information screen.

How to Customize the Vehicle Settings P. 362

Tailgate

Precautions for Opening/Closing the Tailgate

Always make sure individuals and objects are clear of the tailgate before opening or closing it.

Models without power tailgate

- Open the tailgate all the way.
 - ▶ If it is not fully opened, the tailgate may begin to close under its own weight.
- Be careful when it is windy. The wind may cause the tailgate to close.

All models

Keep the tailgate closed while driving to:

- Avoid possible damage.
- Prevent exhaust gas from leaking into the vehicle.
 - Carbon Monoxide Gas P. 89

Precautions for Opening/Closing the Tailgate

Anyone caught in the path of a tailgate that is being opened or closed can be seriously injured.

Make sure that all people are clear of the tailgate before opening or closing it.

Be careful not to hit your head on the tailgate or to put your hands between the tailgate and the cargo area when closing the tailgate.

When you are storing or picking up cargo from the cargo area, or by using a forward and back kicking motion under the center of the rear bumper for hands free access*, while the engine is idling, do not stand in front of the exhaust pipe. You may get burned.

Do not allow any passenger in the cargo space. They may get hurt during hard braking, a sudden acceleration, or a crash.

Opening/Closing the Tailgate





When all the doors are unlocked or press the tailgate unlock button^{*} on the remote transmitter, the tailgate is unlocked.

Press the outer handle of the tailgate and lift open the tailgate.


If you are carrying the keyless remote, you do not have to unlock the tailgate before opening it. To close the tailgate, grab the inner handle, pull the tailgate down, and push it closed from outside.

If you close the tailgate when all the doors are locked, the tailgate locks automatically. Some exterior lights flash.

➢Opening/Closing the Tailgate

- Do not leave the keyless remote in the vehicle when you get out. Carry it with you.
- Even if you are not carrying the keyless remote, you can lock/unlock the tailgate while someone else with the keyless remote is within range.
- Do not leave the keyless remote inside the cargo area and close the tailgate. The beeper sounds and the tailgate cannot be closed.

Using the Remote Transmitter*



Press the tailgate unlock button to unlock the tailgate.

≥Using the Remote Transmitter*

If you have unlocked and opened the tailgate using the keyless remote, when closing, the tailgate locks automatically.

Opening/Closing the Power Tailgate*

The power tailgate can be operated by pressing the power tailgate button on the remote transmitter, pressing the power tailgate button in the driver's side control panel, pressing the button on the tailgate, or by raising and lowering your foot under the center of the rear bumper for hands free access^{*}.

The power tailgate can be opened/closed when the transmission is in [P].

Opening/Closing the Power Tailgate*

AWARNING

Opening or closing a power tailgate while any part of a passenger is in the tailgate's operating path can cause serious injury.

Make sure all passengers or objects are clear of the tailgate operating range before opening or closing the tailgate.

NOTICE


Do not push or pull on the power tailgate when it is being automatically opened or closed. Forcibly opening or closing the power tailgate while in operation can deform the tailgate frame.

When operating the power tailgate, make sure there is enough space around your vehicle. People near the tailgate may be seriously hurt if the tailgate hits or closes on their heads. Be especially cautious if children are around.

The power tailgate may not open or close under the following conditions:

- You start the engine while the tailgate is automatically opening or closing.
- The vehicle is parked on a steep hill.
- The vehicle is swaying in a strong wind.
- The tailgate or the roof is covered with snow or ice.

Using the Hands Free Access*



Use a forward and back kicking motion for about 1 second under the center of the rear bumper to open or close the power tailgate while carrying the keyless remote.

Some exterior lights will flash and a beeper will sounds, then the tailgate begin to move.

■Using the Hands Free Access*

During rain or in other instances when the vehicle becomes wet, the sensor may not properly detect your foot motion.


When performing work on or around the rear section of the vehicle, you may inadvertently open or close the tailgate.

To prevent this from happening, select Customized Features on the audio/information screen and then select **OFF** for the feature.


How to Customize the Vehicle Settings P. 362

If you hold your foot under the bumper for too long or sweep your foot from side to side, the power tailgate does not open or close.

This function will not operate if you don't have the keyless remote on you. Please make sure you have the keyless remote on you.



Using the Remote Transmitter



Press the power tailgate button for more than one second to operate when the power mode is in VEHICLE OFF.

Some exterior lights flash and the beeper sounds.

If you press the button again while the power tailgate is moving, it will stop. Press the button for more than one second, and the power tailgate will reverse direction.

Customizing when to open the tailgate

Anytime: The power tailgate unlocks and opens at the same time. This is the default setting.

When Unlocked: The tailgate opens when all doors are unlocked.

How to Customize the Vehicle Settings P. 362

Dening/Closing the Power Tailgate*

If you close the power tailgate when all the doors are locked, the power tailgate locks automatically.

If you replace the battery or the power tailgate fuse while the tailgate is open, the power tailgate may be disabled. The power tailgate resumes once you manually close the tailgate.

Installing aftermarket components other than Honda Genuine Accessories on the power tailgate may prevent it from fully opening or closing.

Make sure the power tailgate is fully open before you transport your cargo in and out.

The beeper sounds when you start driving while the power tailgate is still open, or closing.

Using the Power Tailgate Button



To open or close the power tailgate, press the power tailgate button for about one second.
▶ Some exterior lights flash and the beeper sounds.

If you press the button again while the power tailgate is moving, it will stop. Press the button for about one second, and the power tailgate will reverse direction.

Dpening/Closing the Power Tailgate*

Do not touch the sensors located on both sides of the tailgate. The power tailgate does not close if you touch either sensor when you are trying to close the tailgate.

Be careful not to scratch the sensors with a sharp object. If scratched, they can be damaged, and the power tailgate closing feature malfunctions.

If the power tailgate meets resistance while opening or closing, the auto reverse feature reverses the direction. The beeper sounds three times.

The auto reverse function stops sensing when the tailgate is almost closed to make sure that it fully closes.

Using the Tailgate Outer Handle



If you press the outer handle of the tailgate for no longer than one second, the tailgate opens automatically.

- ► The beeper sounds.
- If you want to open the tailgate manually, press the button for more than one second.

Dening/Closing the Tailgate P. 143

If you are carrying the keyless remote, you do not have to unlock the tailgate before opening it.

If you press the outer handle again while the power tailgate is moving, it will stop. Press the outer handle, and the power tailgate will reverse direction.

≥Using the Tailgate Outer Handle

- Do not leave the keyless remote in the vehicle when you get out. Carry it with you.
- Even if you are not carrying the keyless remote, you can lock/unlock the tailgate while someone else with the remote is within range.
- Do not leave the keyless remote inside the cargo area and close the tailgate. The beeper sounds and the tailgate cannot be closed.

You can change the power tailgate operation setting on and off.

How to Customize the Vehicle Settings P. 362


Using the Tailgate Inner Button



Press the tailgate inner button on the tailgate to close the power tailgate. ► The beeper sounds.

If you press the button again while the power tailgate is moving, it will stop. Press and release the button again, and the power tailgate will reverse direction.

Programming Tailgate Position




The extent to which the power tailgate automatically opens can be programed.

To program:

1. Open the tailgate to the desired position.

Tailgate Inner Button



2. Press and hold the tailgate inner button. You will hear one long beep, followed by two short beeps.

≥Programming Tailgate Position

If the tailgate is only slightly opened, the position cannot be programed, even if you push the tailgate inner button.

If you want to reprogram the power tailgate to open all the way, manually raise the tailgate to its upper most position and follow the directions in step 2.

Auto-Closer

If you manually close the power tailgate, it latches automatically.

Power Tailgate Fall Detection

Automatically lowers the power tailgate when there is a possibility that the fully opened power tailgate can fall down by its own weight (for example, with snow on the tailgate). The beeper sounds while the power tailgate lowers.

Auto-Closer

Keep your hands away from the tailgate when you manually close the tailgate and let it latch automatically. It is dangerous to put your hands around the tailgate as it starts to latch itself.

The auto-closer feature does not activate if you press the tailgate outer handle while the power tailgate is closing.

NOTICE

Do not put any force on the tailgate while the power tailgate is latching.

➢Power Tailgate Fall Detection

If you try to manually close the power tailgate immediately after it fully opens, the power tailgate fall detection may activate.

Once the power tailgate fall detection activates, wait until the power tailgate fully closes. Keep away from the power tailgate when it is in motion.

If the power tailgate fall detection constantly activates, consult a dealer.

Precautions for Opening/Closing the Sliding Doors

Always make sure individuals and objects are clear of the sliding doors.

Opening the sliding doors

Open the door all the way until it stops.

▶ If it is not fully opened, the door may close again by its own weight.

Precautions for Opening/Closing the Sliding Doors

Closing a sliding door while any part of a passenger is in the door's path can cause serious injury.

Make sure all passengers are clear of the doorway before closing a sliding door.

Do not leave the sliding door open while parking on a slope. The door may slide close by its weight.

When opening or closing the sliding doors, do not grab the door or place your hand on the vehicle body. Use the handle.

Do not put your foot and hand on the sliding door rail and on the rollers.

If a small child is in the vehicle, use the childproof door locks to prevent the child in the rear seat from accidentally opening the sliding doors.

Childproof Door Locks P. 140

Do not put any items that stick out from the pocket in the door pockets. It may prevent the doors from properly opening or closing, and damage the vehicle.

Opening/Closing a Sliding Door



From outside

To open: Pull the door handle rearward and slide the door. **To close:** Pull the door handle forward and slide the door


From inside

To open: Grab the inner handle and pull it rearward. Slide the door. **To close:** Grab the inner handle and pull it forward. Slide the door.

➢Opening/Closing a Sliding Door


Once a door is fully opened, the door position is locked.

Do not step on the lower arm of the sliding door or the cover that stores the wiring for the sliding door. The lower arm or the wiring will likely be damaged, causing the sliding door to malfunction.



If you try to open the sliding door with the window open more than 5 inch (13 cm), the door stops halfway. Close the door, close the window, and then open the door again.

While the fuel fill door is open, the beeper sounds and you cannot operate the driver's side sliding door. Operate the driver's side sliding door after the fuel fill door is closed.



Opening/Closing the Power Sliding Doors

The power sliding doors can be operated by pressing the power sliding door button on the keyless remote, pressing the power sliding door switches on the dashboard or door pillars, or using the door handle.

The power sliding doors can be operated when:

- The sliding door main switch is in the **ON** position.
- The power sliding door is unlocked.
- The fuel fill door is closed (on the driver's side sliding door only).
- The power mode is in VEHICLE OFF or the remote engine start mode is active with use of the keyless remote.
- The transmission is in **P**, the brake pedal is depressed, or the parking brake is applied (with the power mode in ON) when using the power sliding door switches on the dashboard.

Dening/Closing the Power Sliding Doors

Check that passengers, especially children, do not have their hands on the sliding doors or on the door pillars before its operation. If someone is caught in the opening or closing sliding door, it can cause serious injury.

Before replacing a rear tire, turn the power sliding door main switch to OFF.

Operate the power sliding doors only when the vehicle is at a complete stop. Make sure you apply the brake when rear passengers are boarding or exiting.

If the transmission is in a position other than [P], and release the brake pedal and the parking brake: While opening – The sliding door stops and is left ajar.

While closing – The beeper sounds until the door closes.

Switching between Manual and Automatic Operations



Automatic operation: Select the ON position of the sliding door main switch. Manual operation: Select the OFF position of the sliding door main switch.

Depending/Closing a Sliding Door P. 154

➢Opening/Closing the Power Sliding Doors

Do not turn the main switch off while the power sliding door is in operation on a slope. The power sliding door's fail-safe mode activates and the beeper sounds continuously.

When the fail-safe mode is active, turn the main switch on and close the door automatically.

The following can deactivate the fail-safe mode and the sliding door may close by its own weight:

- Using the door handle
- Turning the main switch from **ON** to OFF

If you replace the battery or the power sliding door fuse while the door is open, the power sliding door may be disabled. The power sliding door resumes once you manually close the door.

Power Sliding Door Switches




The power sliding door opens when you press the **OPEN** side of the $[\underline{1,0}] / [\underline{0,1}]$ switch, and closes when you press the **CLOSE** side of the $[\underline{1,0}] / [\underline{0,1}]$ switch.

While the power sliding door is in operation, if you press the switch that corresponds to that power sliding door, the beeper sounds and the operation stops.

To resume the power sliding door operation, press the same switch again.

Opening/Closing the Power Sliding Doors

Auto Reverse



Do not touch the pinch sensor located at the front edge of the power sliding door. Do not damage the sensor. The power sliding door may not operate properly.


If the power sliding door senses resistance when closing automatically, it will stop closing and reverse direction. The beeper sounds.

Before the power sliding door operation, make sure there are no people or obstacles near the door. The auto reverse function should be activated in case of emergency only. If someone is caught in the opening or closing sliding door, it can cause serious injury. Pay special attention to children.

Closing a power sliding door on someone's hand or fingers can cause serious injury. Some parts of the door edge do not sense resistance when the door is near closing.

Remote Transmitter

Driver's Side Power Sliding Door Button



Door Button

Press the power sliding door button for more than one second to operate.

While the power sliding door is in operation, if you press the button that corresponds to that power sliding door, the beeper sounds and the operation stops.

If you press the same button again, the sliding door reverses its direction.

≫Remote Transmitter

When you press the power sliding door button to open the door, the front door on the same side unlocks.

Customizing when to open the sliding doors

Anytime: The power sliding door unlocks and opens at the same time. This is the default setting.

When Unlocked: The door opens when all doors are unlocked.

How to Customize the Vehicle Settings P. 362

Customizing when to open the sliding doors

In **When Unlocked**, trying to operate the power sliding door without unlocking the door triggers the beeper to sound.

Door Handles



Outer handles

Pull the outer handle toward you. The sliding door starts opening or closing.

When the power sliding door is locked, pulling the outer handle unlocks all the doors and tailgate while the keyless remote is in your possession.

The power sliding door handle you pulled the handle with automatically operates.

While a power sliding door is in operation, if you pull either handle that corresponds to that power sliding door, the beeper sounds and the operation stops.

Pull the same handle again, the power sliding door moves to reverse direction.

➢Opening/Closing the Power Sliding Doors

While the fuel fill door is open, the beeper sounds and you cannot operate the driver's side power sliding door. Operate the driver's side power sliding door after the fuel fill door is closed.

The beeper will sound and the power sliding door will not open if you pull the inner or outer handle under the following conditions:

- The power mode is in ON.
- The transmission is not in **P**.
- The brake pedal is released.
- The parking brake is released.

If you leave the power sliding door half open on a steep hill with the engine off, the door starts to slide down toward the hill bottom after 30 minutes. While the door slides down, the beeper sounds.



Inner handles

Pull it rearward to automatically open the sliding door, and pull it forward to automatically close the door.

While a power sliding door is in operation, if you pull either handle that corresponds to that power sliding door, the beeper sounds and the operation stops.

To resume the power sliding door operation, pull the same handle in the same direction again.

Auto-Closer

If you manually close the power sliding door, it latches automatically.

The auto-closer feature activates with or without the main switch **ON**.

➢Auto-Closer

Keep your hands away from the power sliding door. The manually closed door latches automatically when it is half-shut.

The auto-closer feature does not activate if you keep pulling the inner or outer handle while the sliding door is closing.

Do not put any force on the power sliding door while the door is latching.

Immobilizer System

This system prevents a key that has not been pre-registered from starting the engine.

Pay attention to the following when pressing the **ENGINE START/STOP** button:

- Do not allow objects that emit strong radio waves near the ENGINE START/ STOP button.
- Make sure the key is not covered by or touching a metal object.
- Do not bring a key from another vehicle's immobilizer system near the **ENGINE START/STOP** button.
- Do not put the key near magnetic items. Electronic devices, such as televisions and audio systems, emit strong magnetic fields. Note that even a key chain can become magnetic.

Security System Alarm

The security system alarm activates when the tailgate, hood, or doors are forcibly opened.

The alarm does not activate if the tailgate or doors are opened with the remote transmitter or keyless access system.

When the security system alarm activates

The horn sounds intermittently, and some exterior lights flash.

➢Immobilizer System

NOTICE

Leaving the key in the vehicle can result in theft or accidental movement of the vehicle. Always take the key with you whenever you leave the vehicle unattended.

Do not alter the system or add other devices to it. Doing so may damage the system and make your vehicle inoperable.

Canadian models only: Apply and hold the brake pedal before turning the vehicle on the first time after the battery has been disconnected.

Security System Alarm

Do not alter the system or add other devices to it. Doing so may damage the system and make your vehicle inoperable.

The security system alarm continues for a maximum of two minutes until the security system alarm deactivates.

■ To deactivate the security system alarm

Unlock the vehicle using remote transmitter or keyless access system, or set the power mode to ON. The system, along with the horn and flashing lights, is deactivated.

Setting the security system alarm

The security system alarm automatically sets when the following conditions have been met:

- The power mode is set to VEHICLE OFF.
- The hood is closed.
- All doors and the tailgate are locked from outside with the key, remote transmitter or keyless access system.

■ When the security system alarm sets

The security system alarm indicator in the instrument panel blinks and the blinking interval changes after about 15 seconds.

■ To cancel the security system alarm

The security system alarm is canceled when the vehicle is unlocked using the remote transmitter, or keyless access system, or when the power mode is set to ON. The security system alarm indicator goes off at the same time.

Security System Alarm

Do not set the security system alarm when someone is in the vehicle or a window is open. The system can accidentally activate when:

- Unlocking the door with the lock tab.
- Opening the hood with the hood release.


Models with power tailgate

• Opening the tailgate with the power tailgate button on the dashboard.

If the battery goes dead after you have set the security system alarm, the security alarm may sound once the battery is recharged or replaced. If this occurs, deactivate the security system alarm by unlocking a door using the remote transmitter or keyless access system.

If you unlock a door with the built-in key while the security system is activated, the alarm will sound.

Panic Mode



The panic button on the remote transmitter

If you press the panic button for approximately one second, the following will occur for about 30 seconds:

- The horn sounds.
- Some exterior lights flash.

Canceling panic mode

- Press any button on the remote transmitter.
- Set the power mode to ON.


Opening/Closing the Power Windows

The power windows can be opened and closed when the power mode is in ON, using the switches on the doors. The driver's side switches can be used to open and close all of the windows.

The power window lock button on the driver's side must be switched off to open and close the windows from anywhere other than the driver's seat.

When the power window lock button is pushed in, the indicator comes on and you can only operate the driver's window. Turn the power window lock button on if a child is in the vehicle.

Opening/Closing the Windows with Auto-Open/Close Function



Manual operation

To open: Push the switch down lightly, and hold it until the desired position is reached. **To close:** Pull the switch up lightly, and hold it until the desired position is reached.

Automatic operation

To open: Push the switch down firmly. **To close:** Pull the switch up firmly.

The window opens or closes completely. To stop the window at any time, push or pull the switch briefly.

Dpening/Closing the Power Windows

Closing a power window on someone's hands or fingers can cause serious injury.

Make sure your passengers are away from the windows before closing them.

The power windows can be operated for up to 10 minutes after you set the power mode to VEHICLE OFF.

Opening either front door cancels this function.

Auto Reverse

If a power window senses resistance when closing automatically, it will stop closing and reverse direction.

The driver's window auto reverse function is disabled when you continuously pull up the switch.

The auto reverse function stops sensing when the window is almost closed to ensure that it fully closes.

Opening the Windows with the Remote

Unlock —— Button	

To open: Press the unlock button, and then within 10 seconds, press it again and hold it. If the windows stop midway, repeat the procedure.

Dening/Closing the Power Windows

While driving with any of the windows open, you may hear a booming, throbbing, or helicopter-type noise or pressure. This is called wind buffeting. This is a normal occurrence that can be minimized.

If you hear a wind buffeting noise with any of the windows open, lower all of the other windows slightly or open the moonroof.

Opening the Windows with the Remote

If you open the windows with the remote, the moonroof will open automatically along with them.

You can turn off or on the feature to open the windows with the keyless remote setting using the audio/information screen.

How to Customize the Vehicle Settings P. 362

Closing the Windows with the Key



To close:

Lock the driver's door with the key. Within 10 seconds of returning the key to the central position, turn the key in the lock direction and hold it there.

Release the key to stop the windows at the desired position. If you want further adjustment, repeat the same operation.

➢Closing the Windows with the Key


If you close the windows with the key, the moonroof will close automatically along with them.

Moonroof

Opening/Closing the Moonroof

You can operate the moonroof when the power mode is in ON. Use the switch in the front of the ceiling to open and close the moonroof.

Using the Moonroof Switch



Automatic operation

To open: Pull the switch back firmly. **To close:** Push the switch forward firmly.

The moonroof automatically open or close all the way. To stop the moonroof midway, pull or push the switch briefly.

Manual operation

To open: Pull the switch back lightly, and hold it until the desired position is reached. **To close:** Push the switch forward lightly, and hold it until the desired position is reached.

≥Opening/Closing the Moonroof

Opening or closing the moonroof on someone's hands or fingers can cause serious injury.

Make sure all hands and fingers are clear of the moonroof before opening or closing it.

NOTICE

Opening the moonroof in below freezing temperature or when it is covered with snow or ice can damage the moonroof panel or motor.

The moonroof can be operated for up to 10 minutes after you set the power mode to VEHICLE OFF. Opening either front door cancels this function.

When resistance is detected, the auto reverse function causes the moonroof to change directions, then stop. Auto reverse stops sensing when the moonroof is almost closed to ensure that it fully closes.

Make sure that all objects, including fingers, are clear of the moonroof.

■ Tilting the moonroof up

To tilt: Push on the center of the moonroof switch.

To close: Push the switch forward firmly, then release.

Dening/Closing the Moonroof

You can use the remote transmitter or the key to operate the moonroof.

- Depending the Windows with the Remote P. 166
- Closing the Windows with the Key P. 167

ENGINE START/STOP Button

Changing the Power Mode



If you carry the keyless remote and press **ENGINE START/STOP** button without depressing the brake pedal, the power mode will change in this order: VEHICLE OFF \rightarrow ACCESSORY \rightarrow ON \rightarrow VEHICLE OFF.

VEHICLE OFF: Vehicle power is turned OFF.

ACCESSORY:

The audio system and some accessories can be used.

ON:

All accessories can be used.

ENGINE START/STOP Button

If the keyless remote is set in a storage box or another place where its signal can be interrupted, the power mode may not change.


Automatic Power Off

If you leave the vehicle for 30 to 60 minutes with the transmission in \square and the power mode in ACCESSORY, the vehicle automatically goes into the mode similar to VEHICLE OFF (LOCK) to avoid draining the battery.

Power Mode Reminder

If you open the driver's door when the power mode is set to ACCESSORY, a warning beep sounds.

Keyless Remote Reminder



When the power mode is set to any mode other than OFF and you remove the keyless remote from the vehicle and shut the door, an alarm will sound. If the alarm continues to sound, place the keyless remote in another location.

When the power mode is in ACCESSORY

The alarm will sound from outside the vehicle.

■ When the power mode is in ON

An alarm will sound both inside and outside the vehicle. In addition, a warning indicator will appear on the instrument panel.

Keyless Remote Reminder

When the keyless remote is within the system's operational range, and all the doors are closed, the warning function cancels.


If the keyless remote is taken out of the vehicle after the engine has been started, you can no longer change the **ENGINE START/STOP** button mode or restart the engine. Always make sure that the keyless remote is in your vehicle when you operate the **ENGINE START/STOP** button.

Removing the keyless remote from the vehicle through a window does not activate the warning buzzer.

Do not put the keyless remote on the dashboard or in the glove box. It may cause the warning buzzer to sound. Under some other conditions that can prevent the vehicle from locating the keyless remote, the warning buzzer may also sound even if the keyless remote is within the system's operational range.

Lights

Headlights/Parking Lights



The lights will turn on automatically depending on the ambient brightness. They can also be switched on and off manually.

The exterior lights will switch on automatically when the light switch is set to **AUTO** while the power mode is in ON.

≫Lights

When the lights are on, the lights on indicator in the instrument panel will be on.

Lights On Indicator P. 101

➢Headlights/Parking Lights

When the parking lights are on, the side marker, tail, and rear license plate lights will also switch on.

When the light switch is turned to $\boxed{2005}$ or $\boxed{100}$ and the power is turned to OFF, a beeper sounds when the driver's door is opened.

When the light switch is turned to **AUTO** and the ambient light levels are low, the headlights and parking lights will switch on if you unlock a door. They will switch off when the door is locked.

Do not leave the lights on when the engine is off because it will cause the battery to discharge.

If you suspect that the headlights are not positioned properly, have the vehicle inspected by a dealer.

Manual operation Headlights/parking lights: Turn the light switch to EO.

Parking lights:

Turn the light switch to 2005.

Headlight/parking lights off:

Turn the light switch to **OFF** and release it while the transmission is in $[\mathbf{P}]$ and the parking brake is applied.


- ▶ The lights will come back on automatically when:
- The light switch is turned to **OFF** again and released.
- The transmission is changed out of **P** and the parking brake is released.

Controls

Continued

High Beams

When the headlights are on, push the lever forward. Pull the lever back to return to low beams.



Flashing the high beams

Pull the lever back to switch on the high beams.

Release the lever to return to low beams.

Headlights/Parking Lights

The light sensor is in the location shown below. Do not cover this light sensor with anything; otherwise, the automatic lighting system may not work properly.


Models without automatic intermittent wipers



Models with automatic intermittent wipers



Turn Signals



The turn signals can be used when the power mode is in ON.

■ ①: Turn signal

Push the lever up or down based on the direction you want to turn, and the turn signal will blink.

■ ②: One-touch turn signal

When you lightly push the lever up or down and release it, the turn signal will blink 3 times.

If you lightly push the lever in the opposite direction while it is blinking, the blinking will stop.

➢Headlights/Parking Lights

U.S. models

You can adjust the auto light sensitivity as follows:



P. 362

■Turn Signals

The turn signal indicator on the instrument panel will blink when the external turn signal blinks.

Indicators P. 92

Headlight Integration with Wipers

The headlights automatically come on when the wipers are used several times within a certain number of intervals with the headlight switch in **AUTO**. The headlights automatically go off a few minutes later if the wipers are stopped.

Automatic Lighting Off Feature

The headlights, all other exterior lights, and the instrument panel lights turn off 15 seconds after you set the power mode to VEHICLE OFF, take the remote with you, and close the driver's door.

If you set the power mode to VEHICLE OFF with the headlight switch on, but do not open the door, the lights turn off after 10 minutes (3 minutes, if the switch is in the **AUTO** position).

The lights turn on again when you unlock or open the driver's door. If you unlock the door, but do not open it within 15 seconds, the lights go off. If you open the driver's door, you will hear a reminder chime alerting you that the lights are on.

Headlight Integration with Wipers

This feature activates while the headlights are off in **AUTO**.

The instrument panel brightness does not change when the headlights come on.

At dark ambient light levels, the automatic lighting control feature turns on the headlights, regardless of the number of wiper sweeps.

You can turn the headlight integration with wipers function on and off.

How to Customize the Vehicle Settings P. 362

➢Automatic Lighting Off Feature

You can change the headlight auto off timer setting. How to Customize the Vehicle Settings P. 362

Fog Lights



When the low beam headlights are on, turn the fog light switch on to use the fog lights.

Daytime Running Lights

The parking/daytime running lights come on when the following conditions have been met:

- The power mode is in ON.
- The headlight switch is **AUTO** or = 0.05.
- The parking brake is released.

The lights remain on even if you set the parking brake. Setting the power mode to VEHICLE OFF will turn off the daytime running lights.

The daytime running lights are off once the headlight switch is turned on, or when the head light switch is in **AUTO** and it is getting darker outside.

Auto High-Beam

The front sensor camera detects the light sources ahead of the vehicle such as the lights of a preceding or oncoming vehicle, or street lights. When you are driving at night, the system automatically switches the headlights between low beam and high beam depending on the situation.

How to Use the Auto High-Beam

Activating the system

When all of the following conditions have been met, the auto high-beam indicator comes on and automatically switches between the high beam and low beam, depending on the situation.

been met, carry out either of the procedures below and the indicator will come on.

• Turn the light switch to $\exists \bigcirc$ then turn the light switch to **AUTO**.



• Pull the lever toward you and release it.

- The power mode is in ON.
- The light switch is in AUTO.
- The lever is in the low beam position.
- The headlights have been automatically activated.
- It is dark outside the vehicle

➢Auto High-Beam

The auto high-beam system does not always operate in every situation. This system is just for assisting the driver. Always observe your surroundings and manually switch the headlights between high beam and low beam if necessary.

If you find the timing of beam changes inconvenient for driving, change the headlight beams manually.

The range and the distance at which the camera can recognize light sources varies depending on conditions surrounding your vehicle.

Regarding the handling of the camera mounted to the inside of the windshield, refer to the following.

Front Sensor Camera P 487

For the auto high-beam to work properly:

- Do not place an object that reflects light on the dashboard.
- Keep the windshield around the camera clean. When cleaning the windshield, be careful not to apply the windshield cleanser to the camera lens.
- Do not attach an object, sticker, or film to the area around the camera.
- Do not touch the camera lens.

If the camera receives a strong impact, or repairing of the area near the camera is required, consult a dealer.

Automatic switching between high-beam and low-beam

When the auto high-beam indicator comes on, the headlights switch between high beam and low beam based on the following conditions.

High beam

All of the following conditions must be met before the high beams turn on.

• Your vehicle speed is 25 mph (40 km/h) or more.



- There are no preceding or oncoming vehicles with headlights or taillights turned on.
- There are few street lights on the road ahead.

Low beam

One of the following conditions must be met before the low beams turn on.

- Your vehicle speed is 15 mph (24 km/h) or less.
- There is a preceding or oncoming vehicle with headlights or taillights turned on.
- There are many street lights on the road ahead.

Manual switching between high-beam and low-beam

If you want to manually switch the headlights between high beam and low beam, follow either of the procedures below. Note that when you do this, the auto high-beam indicator will turn off and the auto high-beam will be deactivated.

Using the lever:

Pull the lever toward you for flashing the high beams then release it.

- ► To reactivate the auto high-beam, follow either of the procedures below and the auto high-beam indicator will come on.
- Pull the lever toward you and release it.
- Turn the light switch to **ED** and then to **AUTO** when the lever is in the low beam position.

➢How to Use the Auto High-Beam

In the following cases, the auto high-beam system may not switch the headlights properly or the switching timing may be changed. If the automatic switching operation does not fit your driving habits, please switch the headlights manually.

- The brightness of the lights from the preceding or oncoming vehicle is intense or poor.
- Visibility is poor due to the weather (rain, snow, fog, windshield frost, etc.).
- Surrounding light sources like street lights, electric billboards, and traffic lights are illuminating the road ahead.
- The brightness level of the road ahead constantly changes.
- The road is bumpy or has many curves.
- A vehicle suddenly appears in front of you, or a vehicle in front of you is not in the preceding or oncoming direction.
- Your vehicle is tilted with a heavy load in the rear.
- A traffic sign, mirror, or other reflective object ahead is reflecting strong light toward the vehicle.
- The oncoming vehicle frequently disappears under roadside trees or behind median barriers.
- The preceding or oncoming vehicle is a motorcycle, bicycle, mobility scooter, or other small vehicle.

The auto high-beam system keeps the headlight low beam on when:

- Windshield wipers are operating at a high speed.
- The camera has detected dense fog.


Using the light switch:

Turn the light switch to $\blacksquare O$.

To reactivate the auto high-beam, turn the light switch to AUTO when the lever is in the low beam position and the auto high-beam indicator will come on.

How to Turn Off the Auto High-Beam

You can turn the auto high-beam system off. If you want to turn the system off or on, set the power mode to ON, then carry out the following procedures while the vehicle is stationary.



To turn the system off:

With the light switch is in **AUTO**, pull the lever toward you and hold it for at least 40 seconds. After the auto high-beam indicator light blinks twice, release the lever.

To turn the system on:

With the light switch is in **AUTO**, pull the lever toward you and hold it for at least 30 seconds. After the auto high-beam indicator light blinks once, release the lever.

▶How to Use the Auto High-Beam

If the **Some driver assist systems cannot operate: Camera temperature too high** message appears:

- Use the climate control system to cool down the interior and, if necessary, also use defroster mode with the airflow directed toward the camera.
- Start driving the vehicle to lower the windshield temperature, which cools down the area around the camera.

If the Some driver assist systems cannot operate: Clean front windshield or poor viewing condition. message appears:

• Park your vehicle in a safe place, and make sure the windshield is clean. Clean the windshield if it is dirty. If the message does not disappear after driven for a while, have your vehicle checked by a dealer.


▶How to Turn Off the Auto High-Beam

If you turn the auto high-beam system off, the system does not operate until you turn the system on.

Park in a safe place before turning the system off or on.

Wipers and Washers

Windshield Wiper/Washer



- OFF
- B INT^{*1}/AUTO^{*2}
- 4 LO: Low speed wipe
- **5** HI: High speed wipe

The windshield wipers and washers can be used when the power mode is in ON.

MIST

The wipers run at high speed until you release the lever.

■ Wiper switch (OFF, INT^{*1}/AUTO^{*2}, LO, HI)

Move the lever up or down to change the wiper settings.

Adjusting wiper operation*

Turn the adjustment ring to adjust wiper operation.



Lower speed, fewer sweeps



Higher speed, more sweeps

Washer

Sprays while you pull the lever toward you. When you release the lever for more than one second, the spray stops, the wipers sweep two or three more times to clear the windshield, then stop.

*1: Models with manual intermittent operation

*2: Models with automatic intermittent operation

➢Wipers and Washers

NOTICE

When lifting the front wiper arms, move them into the maintenance position before lifting them.

Lifting the Front Wiper Arms P. 547

NOTICE

Do not use the wipers when the windshield is dry. The windshield will get scratched, or the rubber blades will get damaged.

NOTICE

Turn the washers off if no washer fluid comes out. The pump may get damaged.

The wiper motor may stop motor operation temporarily to prevent an overload. Wiper operation will return to normal within a few minutes.

Models with intermittent time adjustment ring

If the vehicle speeds up while the wipers are operating intermittently, the length of the wipe interval shortens.

When the vehicle speeds up, the wiper operation's shortest delay setting () and the ${\bf LO}$ setting become the same.

Automatic Intermittent Wipers*



When you push the lever down to **AUTO**, the windshield wipers sweep once, and go into the automatic mode.

The wipers operate intermittently, at low speed, or at high speed and stop in accordance with the amount of rainfall the rainfall sensor detects.

■ AUTO sensitivity adjustment

When the wiper function is set to **AUTO**, you can adjust the sensitivity of the rainfall sensor (using the adjustment ring) so that wipers will operate in accordance with your preference.

Sensor sensitivity

Low sensitivity

High sensitivity

Wipers and Washers

NOTICE

In cold weather, the blades may freeze to the windshield. Operating the wipers in this condition may damage the wipers. Use the defroster or heated windshield* to warm the windshield, then turn the wipers on.

If the wipers stop operating due to any obstacle such as the buildup of snow, park the vehicle in a safe place. Rotate the wiper switch to OFF, and set the power mode to ACCESSORY or VEHICLE OFF, then remove the obstacle.

➢Automatic Intermittent Wipers[∗]

The rainfall sensor is in the location shown below.




NOTICE

AUTO should always be turned **OFF** before the following situation in order to prevent severe damage to the wiper system:

- Cleaning the windshield
- Driving through a car wash
- No rain present

Rear Wiper/Washer



- OFF
 INT: Intermittent
 ON: Continuous wipe
- Washer

The rear wiper and washer can be used when the power mode is in ON.

■ Wiper switch (OFF, INT, ON) Change the wiper switch setting according to

the amount of rain.

■ Washer (📋)

Sprays on the rear window while you rotate the switch to this position. Hold it to activate the wiper and to spray the washer. Once released, the washer spray will stop and the rear wiper will return to its selected switch setting after a few sweeps.

Operating in reverse


When you put the transmission into \mathbb{R} with the windshield wiper activated, the rear wiper operates automatically as follows even if its switch is off.

Front Wiper Position	Rear Wiper Operation
INT ^{*1} (Intermittent) AUTO ^{*2} (Intermittent)	Intermittent
LO (Low-speed wipe) HI (High-speed wipe)	Continuous

*1: Models with manual intermittent operation

*2: Models with automatic intermittent operation

Rear Defogger/Heated Door Mirror Button



Press the rear defogger and heated door mirror button to defog the rear window and mirrors when the power mode is in ON.

The rear defogger and heated door mirrors automatically switch off after 10-30 minutes depending on the outside temperature.

However, if the outside temperature is $32^{\circ}F$ (0°C) or below, they do not automatically switch off.

Rear Defogger/Heated Door Mirror Button

This system consumes a lot of power, so turn it off when the window has been defogged.

Also, do not use the system for a long time while the engine is idling. This may weaken the battery, making it difficult to start the engine.

When the power mode is set to ON and the outside temperature is below 41°F (5°C), the heated door mirror may automatically activate for 10 minutes.

Canadian models Heated Windshield Button



Press the heated windshield button to deice the windshield at the wiper park area and along the driver side edge of the windshield when the power mode is in ON. The heated windshield will automatically switch off after 15 minutes.

Heated Windshield Button

This system consumes a lot of power, so turn it off when the window has been deiced. Also, do not use the system for a long period when the engine is idling. This may weaken the battery, making it difficult to start the engine.

When the outside temperature is below $39^{\circ}F(4^{\circ}C)$, the heated windshield may automatically activate. The system deactivates itself once the outside temperature reaches $43^{\circ}F(6^{\circ}C)$.

Driving Position Memory System*

You can store two driver's seat positions (except for power lumbar) and outside mirror positions with the driving position memory system.

When you unlock and open the driver's door with a keyless remote or keyless access system, the seat and outside mirrors adjust automatically to one of the two preset positions.

- **DRIVER 1** transmitter is linked to memory button 1.
- **DRIVER 2** transmitter is linked to memory button 2.



The driver's seat moves rearward depending on the set seating position once you

- Stop the vehicle.
- Put the transmission in **P**.
- Set the power mode to VEHICLE OFF.
- Open the driver's door.

Once the power mode is in the ACCESSORY position, the driver's seat moves to the **DRIVER 1** or **2** preset position.

Driving Position Memory System*

Using the audio/information screen, you can disable the automatic seat and door mirrors adjustment function.

How to Customize the Vehicle Settings P. 362

The driver's seat easy exit feature can be turned On/ Off.

How to Customize the Vehicle Settings P. 362

System Operation


The system will not operate if:

- Either memory button is pressed while the seat or mirrors are in motion.
- The seat or mirrors positions are adjusted while in operation.
- Either of the memorized positions is set fully to the rear.

The system may not recognize a key if:

- The key is in close proximity to a cell phone or other wireless device.
- Both keys are in the vehicle at the same time.
- The Driving Position Memory System is disabled in customized features.
- Opening driver's door without fully grabbing door handle.

Storing a Position in Memory




- **1.** Set the power mode to ON. Adjust the driver's seat and the door mirrors to the desired position.
- 2. Press the SET button.
 - You will hear the beep, and the memory button indicator light will blink.
- **3.** Press and hold memory button 1 or 2 within five seconds of pressing the **SET** button.
 - Once the seat and the outside mirrors position has been memorized, the indicator light on the button you pressed stays on.

Storing a Position in Memory

After you press the **SET** button, the storing operation will be canceled when:

- You do not press the memory button within five seconds.
- You readjust the seat and door mirrors position before the double-beep.
- You set the power mode to any position except ON.

Recalling the Stored Position



- **1.** Put the transmission into **P**.
- 2. Apply the parking brake.
- **3.** Press a memory button (1 or 2).
 - You will hear the beeper, and the indicator light will blink.

The seat and the door mirrors will automatically move to the memorized position. When it has finished moving, you will hear the beep, and the indicator light stays on.


➢Recalling the Stored Position

The seat and the door mirrors will stop moving if you:

- Press the **SET** button or memory button 1 or 2.
- Adjust the seat position or door mirrors.
- Put the transmission into a position other than **P**.

Adjusting the Steering Wheel

The steering wheel height and distance from your body can be adjusted so that you can comfortably grip the steering wheel in an appropriate driving posture.



- **1.** While the vehicle is stopped, push the steering wheel adjustment lever down.
 - The steering wheel adjustment lever is under the steering column.
- **2.** Move the steering wheel up or down, and in or out.
 - Make sure you can see the instrument panel gauges and indicators.
- **3.** Pull the steering wheel adjustment lever up to lock the steering wheel in position.
 - After adjusting the position, make sure you have securely locked the steering wheel in place by trying to move it up, down, in, and out.

➢Adjusting the Steering Wheel

Adjusting the steering wheel position while driving may cause you to lose control of the vehicle and be seriously injured in a crash.

Adjust the steering wheel only when the vehicle is stopped.

Interior Rearview Mirror

Adjust the angle of the rearview mirror when you are sitting in the correct driving position.

Rearview Mirror with Day and Night Positions*




Flip the tab to switch the position. The night position will help reduce the glare from headlights behind you when driving after dark.

≫Mirrors

Keep the inside and outside mirrors clean and adjusted for best visibility.

Adjust the mirrors before you start driving. **▶** Front Seats P. 193

Automatic Dimming Rearview Mirror* and Power Door Mirrors*




When you are driving after dark, the automatic dimming rearview mirror and power door mirrors* reduces the glare from headlights behind you. Press the auto button to turn this function on and off. When activated, the auto indicator comes on. Mutomatic Dimming Rearview Mirror* and Power Door Mirrors*

The auto dimming function cancels when the transmission is in $\fbox{R}.$

For information about HomeLink function, refer to following link.

HomeLink[®] Universal Transceiver* P. 232

Power Door Mirrors



You can adjust the door mirrors when the power mode is in ON.

■ Mirror position adjustment


L/R selector switch: Select the left or right mirror. After adjusting the mirror, return the switch to the center position.

Mirror position adjustment switch: Press the switch left, right, up, or down to move the mirror.

Folding door mirrors*

Press the folding button to fold in and out the door mirrors.

Reverse Tilt Door Mirror*




If activated, either side door mirror automatically tilts downward when you put the transmission into $[\mathbf{R}]$; this improves closein visibility on the selected side of the vehicle when backing up. The mirror automatically returns to its original position when you take the transmission out of $[\mathbf{R}]$.

To activate this feature, set the power mode to ON and slide the selector switch to the left or right side.

Seats

Front Seats



Adjust the driver's seat as far back as possible while allowing you to maintain full control of the vehicle. You should be able to sit upright, well back in the seat and be able to adequately press the pedals without leaning forward, and grip the steering wheel comfortably. The passenger's seat should be adjusted in a similar manner, so that it is as far back from the front airbag in the dashboard as possible.

≫ Seats

Always make seat adjustments before driving.

Eront Seats


Sitting too close to a front airbag can result in serious injury or death if the front airbags inflate.

Always sit as far back from the front airbags as possible while maintaining control of the vehicle.

The National Highway Traffic Safety Administration and Transport Canada recommend that drivers allow at least 10 inches (25 cm) between the center of the steering wheel and the chest.




Adjusting the Seat Positions



 Lumbar Support Adjustment Switch*
 Press the top: To move the lumbar support up.
 Press the bottom: To move the lumbar support down.
 Press the front: To increase the entire lumbar support.
 Press the rear: To decrease the entire lumbar support.

Adjusting the Seat-Backs



Adjust the driver's seat-back to a comfortable, upright position, leaving ample space between your chest and the airbag cover in the center of the steering wheel.

The front seat passenger should also adjust their seat-back to a comfortable, upright position.

Reclining a seat-back so that the shoulder part of the belt no longer rests against the occupant's chest reduces the protective capability of the belt. It also increases the chance of sliding under the belt in a crash and being seriously injured. The farther a seat-back is reclined, the greater the risk of injury.

➢Adjusting the Seat-Backs

Reclining the seat-back too far can result in serious injury or death in a crash.

Adjust the seat-back to an upright position, and sit well back in the seat.


Do not put a cushion, or other object, between the seat-back and your back.

Doing so may interfere with proper seat belt or airbag operation.

If you cannot get far enough away from the steering wheel and still reach the controls, we recommend that you investigate whether some type of adaptive equipment may help.

Second Row Seats

Adjusting the Seat Positions

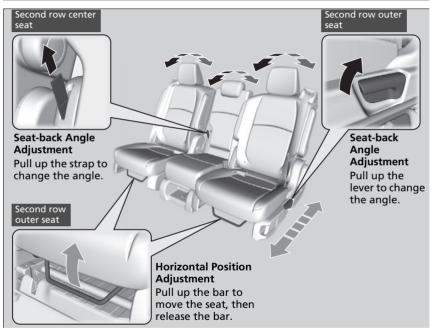

Second Row Seats

AWARNING

An unsecured seat or seat-back can move out of position or collapse without warning if there is sudden acceleration or stop or in a crash.

A seat or seat-back that suddenly moves or collapses can result in severe injury or death.

Always make sure all seats and seat-backs are securely locked into position before driving.

➢Adjusting the Seat Positions


Once the desired seat position and seat-back angles are made, rock the seat-back and forth to make sure they are locked into position.



Folding Down the Second Row Outer Seat



Third Row Seat Access



1. Pulling forward on the walk-in lever or pulling the release strap tilts the second row outer seat's seat-back forward.

To return the seat to the original position, pull

up the seat-back angle adjustment lever and

fold the seat-back in the upright position.

▶ The whole seat slides forward.

1. Pull up the armrest(s).

position.

2. Lower the head restraint to its lowest

Move the seat to its rearmost position.
 Pull the seat-back angle adjustment lever.

then fold the seat-back down

2. When re-positioning the seat, push it firmly to the rear to ensure the horizontal adjusters and the seat-back lock completely into place.

▶Folding Down the Second Row Outer Seat

Make sure that the folded seat-back does not press against the front passenger's seat, as this can cause the weight sensors in the front passenger's seat to work improperly.


Passenger Airbag Off Indicator P. 68

The front seat(s) must be far enough forward so they do not interfere with the second row seats as they fold down.

Make sure the seat-back and seat cushion are securely latched back into place before driving.

Removing the Second Row Center Seat

Your vehicle's multi-functional second row center seat is removable.



- **1.** Store the center seat belt first. Insert the latch plate into the slot on the side of the anchor buckle.
- **2.** Retract the seat belt into the holder on the ceiling.

Seat Belt with Detachable Anchor P. 49

- **3.** Pull up the strap and fold down the second row center seat-back.
- **4.** Pull the lock release strap under the seat cushion, and lift the rear of the seat.
 - ► To lift the seat, grab the handle under the rear side of the seat cushion.
- **5.** Pull the seat-back slightly, then pivot it upward.
 - ► This unhooks the front of the seat from the floor.

≥ Removing the Second Row Center Seat

Do not remove the seat while driving.


The multi-functional center seat can be used as the beverage holder when folded down.

Beverage Holders P. 215

To reinstall the seat, remove all objects and debris from the vehicle floor where the seat will be attached. Insert the front hooks into the front strikers, confirming that both are fully engaged. Begin to lower the rear of the seat; once the seat is within a foot of the floor, allow the seat to drop and lock to the rear floor strikers. Raise the seat-back to an upright position, grab the seat-back and rock it back and forth to confirm that all latches are secured.

Removing a Second Row Outer Seat

Your vehicle's second row outer seats are removable.



- **1.** Lower the head restraint to its lowest position.
- 2. Move the seat to its rearmost position.
- **3.** Ensure the seat belt is unfastened.
- **4.** Pull the seat-back angle adjustment lever, then fold the seat-back down.
- **5.** Pull the lock release lever, tilt the seat-back forward and lift the rear of the seat.
 - ► To lift the seat, grab the handle under the rear side of the seat.
- **6.** Pivot the rear of the seat upward to unhook the front of the seat from the floor.

Removing a Second Row Outer Seat

Do not remove the seat while driving.


Reinstalling a Second Row Outer Seat

With the seat-back folded forward, insert the front seat hooks into the front floor strikers.

After confirming both front hooks are fully inserted into the front strikers, begin to lower the seat, then allow it to drop and lock to the rear floor strikers.



Raise the seat-back to an upright position, then rock the seat-back and forth to confirm both the inner and outer latches are securely locked into position.



Magic Slide[®] 2nd-Row Seats

Your vehicle's second row outer seats are slidable.




- Remove the second row center seat.
 ▶ Removing the Second Row Center Seat P. 198
- **2.** Pull up the handle at the side of the second row outer seat, then slide the seat.

Magic Slide[®] 2nd-Row Seats

When the second row outer seats are in slide (center) position, passengers have easier access to the third row seats.

Third Row Seats


Adjusting the Seat Positions

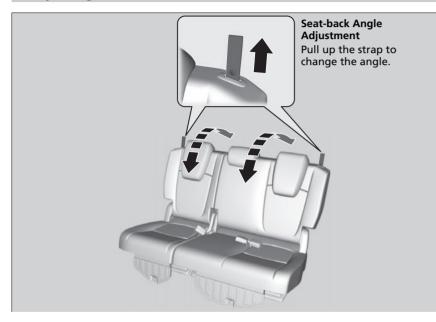

➢Adjusting the Seat Positions

Once a seat is adjusted correctly, rock it back and forth to make sure it is locked in position.

One-Motion 60/40 Split 3rd-Row Magic Seat[®]




- **1.** Store the center seat belt first. Insert a key into the slot on the side of the anchor buckle.
- **2.** Retract the seat belt into the holder on the ceiling.
 - Seat Belt with Detachable Anchor P. 49
- **3.** Lower the head restraints to their lowest position.
- **4.** The right and left halves can be tucked away separately. Pull either strap to release the front leg lock of the third row seat.
- **5.** Continue pulling the strap to tuck the seat and strap away into the cargo area.

One-Motion 60/40 Split 3rd-Row Magic Seat[®]


Remove any items from the cargo area before you tuck away the third row seat.

The instruction label is attached at the back of the third row seat-back.



When you tuck away one side of the third row seats and use the non-recessed part of the cargo area, make sure to secure the cargo. Loose items can fly forward and cause injury if you have to brake hard.


■ When returning the seat to the upright position:



1. Grab the handle from outside. Pull up the folded seat, begin to pivot it forward, then allow it to drop into position.

>> When returning the seat to the upright position:

Make sure the seat is securely latched before driving by rocking the seat-back and forth.




2. The front leg latches when it contacts the floor striker.

Pull the strap to put the seat-back(s) upright. Rock the seat-back and forth to confirm the seat is securely locked in position. There should be no movement.

Rear Seat Reminder

This feature alerts you to the possible presence of passengers or items in the second row or third row seats before you exit the vehicle. It activates when the vehicle is set to VEHICLE OFF if the rear doors were opened shortly before or after the vehicle was set to ON.



A reminder appears on the driver information interface and an alert will sound when the power mode is set to VEHICLE OFF.

≫Rear Seat Reminder

When the power mode is set to VEHICLE OFF, the reminder comes on briefly, then the function is deactivated.

The reminder will not work if the power mode has not been set to ON within 10 minutes of operating the rear doors.

The system does not detect passengers in the rear seats. Instead, it can detect when a rear door is opened and closed, indicating that there may be something in the rear seats.

You can turn off the notification setting. How to Customize the Vehicle Settings P. 362

Maintain a Proper Sitting Position

After all occupants have adjusted their seats and head restraints, and put on their seat belts, it is very important that they continue to sit upright, well back in their seats, with their feet on the floor, until the vehicle is safely parked and the engine is off.

Sitting improperly can increase the chance of injury during a crash. For example, if an occupant slouches, lies down, turns sideways, sits forward, leans forward or sideways, or puts one or both feet up, the chance of injury during a crash is greatly increased.

In addition, an occupant who is out of position in the front seat can be seriously or fatally injured in a crash by striking interior parts of the vehicle or being struck by an inflating front airbag.

Maintain a Proper Sitting Position


Sitting improperly or out of position can result in serious injury or death in a crash.

Always sit upright, well back in the seat, with your feet on the floor.

Head Restraints

Your vehicle is equipped with head restraints in all seating positions.

Adjusting the Front and Second Row Outer and Third Row Outer Head Restraints Positions



Head restraints are most effective for protection against whiplash and other rearimpact crash injuries when the center of the back of the occupant's head rests against the center of the restraint. The tops of the occupant's ears should be level with the center height of the restraint. ➢Head Restraints

Improperly positioning head restraints reduces their effectiveness and increases the likelihood of serious injury in a crash.


Make sure head restraints are in place and positioned properly before driving.

In order for the head restraint system to work properly:

- Do not hang any items on the head restraints, or from the restraint legs.
- Do not place any objects between an occupant and the seat-back.
- Install each restraint in its proper location.

Position head in the center of the head restraint.

Front and second row outer




To raise the head restraint: Pull it upward. **To lower the head restraint:** Push it down while pressing the release button.

Third row outer



Changing the Second Row/Third Row Center Seat Head Restraint Positions



A passenger sitting in the second row/third row center seating position should adjust the height of their head restraint to an appropriate position before the vehicle begins moving. **To raise the head restraint:** Pull it upward. **To lower the head restraint:** Push it down while pressing the release button.

Removing and Reinstalling the Head Restraints

Head restraints can be removed for cleaning or repair.

To remove a head restraint:

Pull the restraint up as far as it will go. Then, push the release button and pull the restraint up and out.

To reinstall a head restraint:

Insert the legs back in place, then adjust the head restraint to an appropriate height while pressing the release button. Pull up on the restraint to make sure it is locked in position.

Removing and Reinstalling the Head Restraints

Failure to reinstall or correctly reinstall the head restraints can result in severe injury during a crash.

Always replace the head restraints before driving.

To remove the third row seat outer head restraints, fold down the seat-back first.

Armrest

Using the Front and Second Row Outer Seat Armrest



Pull down the armrest.

Front seat with adjustable armrest

Pull the armrest all the way down, then pull it up to the desired angle.


Using the Second Row Seat Armrest



Pull up the strap and fold down the center backrest to use as an armrest.

Interior Lights

Interior Light Switches



ON

The interior lights come on regardless of whether the doors or the tailgate are open or closed.

Door activated

The interior lights come on in the following situations:

Front:

- When any of the doors or the tailgate are opened.
- You unlock the driver's door.
- When the power mode is set to VEHICLE OFF.

Cargo Area On On Off Door Activated Position

Cargo area:

When the tailgate is open.

The interior lights remain off regardless of whether the doors or the tailgate are open or closed.

➢Interior Light Switches

In the door activated position, the interior lights fade out and turn off about 30 seconds after the doors are closed.

The lights turn off after 30 seconds in the following situations:

- When you unlock the driver's door but do not open it.
- When you set the power mode to VEHICLE OFF but do not open a door.
- You can change the interior light dimming time.

How to Customize the Vehicle Settings P. 362

The interior lights turn off immediately in the following situations:

- When you lock the driver's door.
- When you set the power mode to ON.
- When you close the driver's door in ACCESSORY mode.

To avoid draining the battery, do not leave the interior light on for an extended length of time when the engine is off.

If you leave any of the doors open in VEHICLE OFF mode, the interior lights go off after about 15 minutes.

If you leave the tailgate open in VEHICLE OFF mode, the cargo area light goes off after about 30 minutes.

Map Light Switches



Front

The map lights can be turned on and off by pressing the lenses.

Map Light Switches

When the front interior light switch is in the door activated position and any door is open, the map light will not go off when you press the lens.




Second and third row

The map lights can be turned on and off by pressing the lenses when the front interior light switch is in the door activated position.

Storage Items

Glove Box



Pull the handle to open the glove box. You can lock the glove box with the built-in key.

Slove Box

An open glove box can cause serious injury to your passenger in a crash, even if the passenger is wearing the seat belt.


Always keep the glove box closed while driving.

Center Pocket



Pull the handle to open the center pocket.


Console Box*

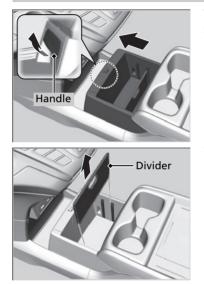

To open the console box, pull the handle and slide the box forward.

You can create more storage space by removing the divider.

Console Compartment

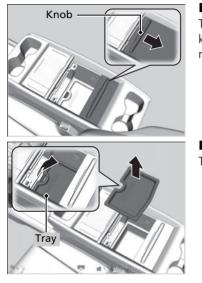


Lid 🖬

To open the console compartment, press the knob to unlock the lid, and then slide it rearward.

Removable tray^{*} The tray can be removed.

Beverage Holders

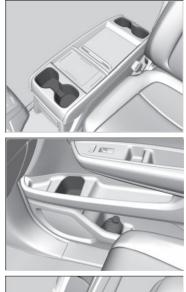

Center console beverage holders

Front door beverage holders



Second row seat beverage holders


To use the beverage holder, fold the backrest. **⊇** Using the Second Row Seat Armrest P. 209

Beverage Holders

NOTICE

Spilled liquids can damage the upholstery, carpeting, and electrical components in the interior.

Be careful when you are using the beverage holders. Hot liquid can scald you.



Rear door beverage holders

Third row seat beverage holders



Coat Hooks



There are coat hooks under the grab handles in the second row, and under the window frames in the third row. Pull it down to use it.

■Coat Hooks

The coat hooks are not designed for large or heavy items.

Cargo Hooks



Use the cargo hooks to secure cargo in the cargo area.

Grocery Bag Hooks	Srocery Bag Hooks	
Front	The hooks are designed to hold light items. Heavy objects may damage the hook.	Controls
Hooks		rols

Sunglasses Holder



To open the sunglasses holder, push and release the indent. To close, push it again until it latches.

You can store eyeglasses and other small items in this holder.

Conversation mirror

The sunglasses holder comes with a mirror. Open the sunglasses holder fully, then push it back to the first detent. You can use the mirror to view the rear seats.

Sunglasses Holder

Keep the holder closed while driving except when accessing stored items.

Other Interior Convenience Items

Accessory Power Sockets

The accessory power sockets can be used when the power mode is in ACCESSORY or ON.



Accessory power socket (console panel)

Open the cover to use it.

Accessory Power Sockets

NOTICE

Do not insert an automotive type cigarette lighter element. This can overheat the accessory power socket.

The accessory power socket is designed to supply power for 12-volt DC accessories that are rated 180 watts (15 amps) or less.

To prevent battery drain, only use the accessory power socket when the engine is running.

When the accessory power socket is not in use, close the cover to prevent any small foreign objects from getting into the accessory power socket.



Accessory power socket (third row seat)* Open the cover to use it.



Accessory power socket (cargo area)

Open the cover to use it.

AC Power Outlet*

The AC power outlet can be used when the engine is running.



Open the cover to use it. Plug in the appliance slightly, turn it 90° clockwise, then push it all the way.

➢AC Power Outlet*

The AC power outlet is designed to supply power for up to 115 volt appliances that are rated 150 watts or less.

When the AC power outlet is not in use, close the cover to prevent any small foreign objects from getting into the AC power outlet.


Continued use of any electric appliance/device exceeding these ratings may result in damage to the appliance/device.

NOTICE

Do not use the AC power outlet for electric appliances that require high initial peak wattage, such as cathode-ray tube type televisions, refrigerators, electric pumps, etc. It is not suitable for devices that process precise data, such as medical equipment, and that require an extremely stable power supply, such as microcomputer-controlled electric blankets, touch sensor lamps, etc.

Wireless Charger*

To use the wireless charger, the power mode must be in ACCESSORY or ON. Charge any devices compatible with Qi wireless charging on the area indicated by the Samark as follows:



- 1. To turn the system on and off, press and hold the () (power) button.
 - ▶ When the system is activated, the green indicator light comes on.
- **2.** Place the device you want to charge on the charging area.
 - The system will automatically start charging the device and the amber indicator light will come on.
 - Make sure that the device is compatible with the system and placed with the chargeable side in the center of the charging area.
- **3.** When charging is completed, the green indicator light will come on.
 - Depending on the device, the amber indicator light will stay on.

≫Wireless Charger*

RF Radiation Exposure Statement: U.S. models

This equipment complies with FCC RF Radiation exposure limits set forth for an uncontrolled environment.

This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

Canadian models

This equipment complies with ISED RF Radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

In order to use safely:

- Remove any metal objects from the charge pad before charging a device.
- Do not open the charger case.
- Do not use the charger if it malfunctions. Contact your dealer.

If the charger interferes with radio communications, attempt to correct the interference:

• Press and hold the switch on the charger for a few seconds to turn off the charger.

appears on the audio/information screen when the device is being charged by the wireless charger.

When charging does not start

Perform one of the solutions in the following table.

Indi	cator	Cause	Solution
Green Blinking & simulta- Amber neously		There is an obstacle(s) between the charging area and the device.	Remove the obstacle(s).
	The device is not within the charging area.	Pick up and reset the device to the center of the charging area where 🚔 is located.	
	neously	The temperature of the wireless charger pad increases.	Temporarily suspend charging the device. Wait for the temperature to drop and attempt to charge the device again.
Amber	Blinking	The wireless charger is faulty.	Contact a dealer for repairs.

≥Wireless Charger*

Metal objects between the charge pad and the device to be charged will get hot and can burn you.

- Always remove foreign objects from the charge pad before charging the device.
- Be sure the surface is clear of dust and other debris before charging.
- Do not spill liquids (i. e. water, drinks, etc.) on the charger and the device.
- Do not use oil, grease, alcohol, benzine or thinner for cleaning the charge pad.
- Do not cover the system with towels, clothing, or other objects while charging etc.
- Avoid spraying aerosols which may come in contact with the charge pad surface.

When using the wireless charger, check the user's manual that came with the compatible device you want to charge.

This system consumes a lot of power. Do not use the system for a long time when the engine is not running. This may weaken the battery, making it difficult to start the engine.

Wireless Charger*

The wireless charger can support up to 15 W, but the charging rate varies based on the device and other conditions.

NOTICE

Do not place any magnetic recording media or precision machines within the charging area while charging.

The data on your cards such as credit cards can be lost because of the magnetic effect. Also, precision machines such as watches can be affected.

"Qi" and I marks are the registered trademarks owned by Wireless Power Consortium (WPC).

In the following cases, charging may stop or not start:

- The device is already fully charged.
- The temperature of the device is extremely high while charging.
- You are at a place that emits strong electromagnetic waves or noises, such as a TV station, electric power plant, or gas station.
- The device has a cover, case, or accessories which are not compatible with wireless charging.

A device may not charge if the size or shape of its chargeable side is not appropriate for use with the charging area.

Wireless Charger *

During the charging phase, it is normal for the charging area and device to heat up.

Charging may be briefly interrupted when:

- All the doors and the tailgate are closed to avoid interference with the proper function
 - to avoid interference with the proper functioning of the keyless access system.
- The position of the device is altered.

Do not charge more than one device at a time on a charging area.

If the device becomes too hot and its battery protection function activates, it may charge extremely slowly or no longer charge. The temperature at which the battery protection function activates depends on the device.

Not all devices are compatible with the system.

Heated Steering Wheel*



The heated steering wheel can be used when the power mode is in ON.

Press the button on the right side of the steering wheel.

When a comfortable temperature is reached, press the button again to turn it off.

The heated steering wheel is turned off every time you start the engine, even if you turned it on the last time you drove the vehicle.

➢Heated Steering Wheel*

Do not use the heated steering wheel continuously when the engine is off. Under such conditions, the battery may be weakened, making the engine difficult to start.

Front Seat Heaters*



The seat heaters can be used when the power mode is in ON.



Press the seat heater button:

Once - The HI setting (three indicators on) Twice - The MID setting (two indicators on) Three times - The LO setting (one indicator on) Four times - The OFF setting (no indicators on)

When the power mode is turned on after it is turned off, the previously selected setting is maintained.

➢Front Seat Heaters^{*}

Heat induced burns are possible when using seat heaters.

Persons with a diminished ability to sense temperature (e.g., persons with diabetes, lowerlimb nerve damage, or paralysis) or with sensitive skin should not use seat heaters.

Do not use the seat heaters even in LO when the engine is off. Under such conditions, the battery may be weakened, making the engine difficult to start.

After a certain period of time, the strength setting for the seat heaters will automatically be reduced by one level at a time until the seat heater shuts off. The elapsed time varies according to the interior environment.

Front Seat Heaters and Seat Ventilation*



The seat heaters or ventilators can be used when the power mode is in ON. The seat heaters: Use them to warm up the seat. The seat ventilators: Use them when you want to ventilate the surface of the seats. When used with the air conditioning, the surface of the seats will become easier to cool.

Press the seat heater or the seat ventilation button:

Once - The HI setting (three indicators on) Twice - The MID setting (two indicators on) Three times - The LO setting (one indicator on) Four times - The OFF setting (no indicators on)

When the power mode is turned on after it is turned off, the previously selected setting is maintained.

Front Seat Heaters and Seat Ventilation*

Heat induced burns are possible when using seat heaters.


Persons with a diminished ability to sense temperature (e.g., persons with diabetes, lowerlimb nerve damage, or paralysis) or with sensitive skin should not use seat heaters.

Do not use the seat heaters and the seat ventilation even in LO when the engine is OFF. Under such conditions, the battery may be weakened, making the engine difficult to start.

After a certain period of time, the strength setting for the seat heaters will automatically be reduced by one level at a time until the seat heater shuts off. The elapsed time varies according to the interior environment.



Integrated Sunshades



Second row sunshades


Pull the tab and roll up the sunshade all the way. Use the hooks to hang it.

Third row sunshades*

Pull the tab and roll up the sunshade all the way. Attach the tab to the anchor.

➢Integrated Sunshades

Use the sunshades only when the windows are fully closed. Using the shade while a window is open can unhook and blow off the shade, hitting and hurting anyone sitting near the window. To store the sunshade, hold the tab and slowly retract the sunshade. Do not pull the sunshade in directions other than upward.



HomeLink[®] Universal Transceiver*

The HomeLink[®] Universal Transceiver can be programed to operate up to three remote controlled devices around your home, such as garage doors, lighting, or home security systems.

Important safety precautions

Refer to the safety information that came with your garage door opener to test that the safety features are functioning properly. If you do not have the safety information, contact the manufacturer.


Before programming HomeLink, make sure that people and objects are out of the way of the garage or gate to prevent potential injury or damage.

When programming a garage door opener, park just outside the garage door's path.

➢HomeLink[®] Universal Transceiver[∗]

Before programming HomeLink to operate a garage door opener, confirm that the opener has an external entrapment protection system, such as an "electronic eye," or other safety and reverse stop features. If it does not, HomeLink may not be able to operate it.

Training HomeLink



If it is necessary to erase a previously entered learned code:

- Press and hold the I and III HomeLink buttons for about 10 seconds, until the green indicator blinks. Release the buttons, and proceed to step 1.
- If you are training the second or third button, go directly to step 1.

■Training HomeLink

NOTE:

Some LED lightbulbs installed in the garage door opener can interfere with the training and consistent operation of your HomeLink device. Please consider use of Low RF interference bulbs in your garage door opener.

The instructions on the next page should work for most gate or garage openers, but may not work for all. For detailed instructions about your specific remote opener, visit *http://www.homelink.com* or call (800) 355-3515.


Programming a button

- **1.** Position the remote transmitter you wish to link 1 to 3 inches (3 8 cm) from the HomeLink[®] button you want to program.
- 2. Press and release the desired HomeLink button. Is the HomeLink indicator (LED) slowly flashing orange?

NO



- **3a.** Hold the button on the remote transmitter. Does HomeLink indicator (LED) change from slowly flashing orange to rapidly flashing green or continuously on green? The process should take less than 60 seconds.
- 4. Press and hold the programed HomeLink button for about a second. Does the device (garage door opener) work?
- 3b. Canadian Garage Door Opener A Press and release the Homel ink button. Press, hold and release the button on the remote every 2 secs. Does the Homel ink indicator (LED) change from *slowly flashing orange to* rapidly flashing or continuously on areen? The process should take less than 60 seconds.



6. Press and hold the HomeLink button again. The remote-controlled device should operate.

Training Complete

HomeLink indicator rapidly flashes

5a. The remote has a rolling code. Press the "learn" button on the remote-controlled device (e.g. garage door opener).

5b. Within 30 secs, press and hold the programed HomeLink button for 2 secs.

➢Training HomeLink

Reprogramming a Button

If you want to retrain a programed button for a new device, you do not have to erase all button memory. You can replace the existing memory code using this procedure:

1. Press and hold the desired Homel ink button until the HomeLink indicator begins to slowly flash orange. This should take about 20 seconds.

2. Release the HomeLink button and position the remote transmitter you wish to link 1 - 3 inches (3 - 8 cm) from the HomeLink button you want to program, then follow steps 3 - 6 under "programming a button."

Erasing Button Memory

To erase programming from the buttons, press and hold the two outside HomeLink buttons until the HomeLink indicator changes from orange to rapidly flashing green. This should take about 10 seconds. You should erase all programming before selling the vehicle.

Operating

To operate, simple press and release the programed HomeLink button Activation will now occur for the trained device


Ouestions

For questions or comments, visit www.HomeLink.com, www.youtube.com/ HomeLinkGentex, or by calling the HomeLink Hotline (North America only) at (800) 355-3515.

HomeLink® is a registered trademark of Gentex Corporation.

Using Automatic Climate Control

The automatic climate control system maintains the interior temperature you select. The system also selects the proper mix of heated or cooled air that raises or lowers the interior temperature to your preference as quickly as possible.

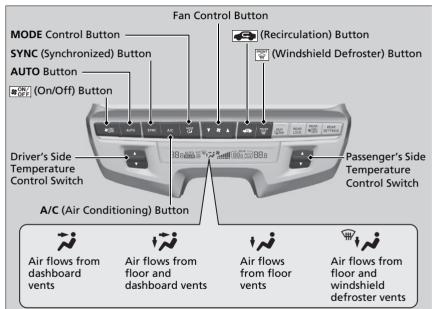

Use the system when the engine is running.

- 1. Press the AUTO button.
- **2.** Adjust the interior temperature using the driver's side or passenger's side temperature control switch.
- **3.** Press the [SON/OFF] (ON/OFF) button to cancel.

≥ Using Automatic Climate Control

If any buttons are pressed while using the climate control system in auto, the function of the button that was pressed will take priority.

The **AUTO** indicator will go off, but functions unrelated to the button that was pressed will be controlled automatically.

During idle-stops, air-conditioning is suspended, and only the blower remains active.

If you do not want air-conditioning suspended, press the Auto Idle Stop **OFF** button to cancel idle-stop.

To prevent cold air from blowing in from outside, the fan may not start immediately when the **AUTO** button is pressed.

If the interior is very warm, you can cool it down more rapidly by partially opening the windows, turning the system on auto, and setting the temperature to low. Change the fresh air mode to recirculation mode until the temperature cools down.

When you set the temperature to the lower or upper limit, **Lo** or **Hi** is displayed.

Pressing the **BONE** button switches the climate control system between on and off. When turned on, the system returns to your last selection.

Switching between the recirculation and fresh air modes

Press the event (recirculation) button and switch the mode depending on environmental conditions.

Recirculation mode (indicator on): Recirculates air from the vehicle's interior through the system.

Fresh air mode (indicator off): Maintains outside ventilation.

➢Using Automatic Climate Control


Models with Driving Position Memory System

When you unlock the doors with your remote, the driver's ID (**DRIVER 1** or **DRIVER 2**) is detected, and the climate control settings are turned to the respective mode automatically when you set the power mode to ON.

All models

While ECON mode is active, the climate control system may have reduced cooling performance.

Defrosting the Windshield and Windows



To rapidly defrost the windows

Pressing the result button turns the air conditioning system on and automatically switches the system to fresh air mode.

Press the \boxed{m} button again to turn off, the system returns to the previous settings.

Defrosting the Windshield and Windows

For your safety, make sure you have a clear view through all the windows before driving.

Do not set the temperature near the upper or lower limit.


When cold air hits the windshield, the outside of the windshield may fog up.

If you press the $\ensuremath{\mathbb{T}}$ button during Auto Idle Stop, the engine restarts automatically.

➢To rapidly defrost the windows


After defrosting the windows, switch over to fresh air mode.

If you keep the system in recirculation mode, the windows may fog up from humidity. This impedes visibility.



- **1.** Press the 🛒 button.
- 2. Press the 🗲 button.

Synchronization Mode

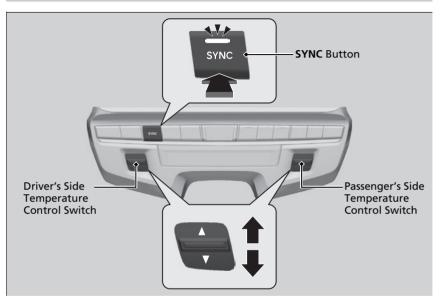

You can set the temperature synchronously for the driver's side, the passenger's side and the rear passenger compartment in synchronization mode.

- 1. Press the SYNC button.
 - ► The system switches to synchronization mode.
- 2. Adjust the temperature using the driver's side temperature control switch.

Press the **SYNC** button, adjust the interior temperature using the passenger's side temperature control switch or changing the rear temperature to return to dual mode.


Synchronization Mode

When you press the $[\begin{tabular}{c} \end{tabular}$ button, the system changes to synchronization mode.

When the system is in dual mode, the driver's side temperature, the passenger's side temperature, and the rear temperature can be set separately.

Rear Climate Control System

Using the Rear Climate Control System From the Front Panel

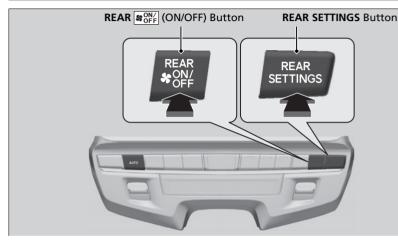

Use the system when the engine is running and the climate control system is operating.

- **1.** Press the **REAR SOLUTION** (ON/OFF) button.
- 2. Press the **REAR SETTINGS** button.
 - ► The system switches to the rear control mode for 10 seconds. The **REAR** indicator appears on the display.
- 3. Press the AUTO button.
 - ▶ The rear system changes to AUTO mode.
 - ► The system automatically adjusts the fan speed and airflow levels to maintain the set rear temperature. Change the temperature if necessary.


4. To turn off the rear climate control system, press the **REAR** $[m_{OFF}]$ (ON/OFF) button.

➢Rear Climate Control System

LOCK appears on the rear control panel while the rear lock is on.

If the rear lock is on while in SYNC mode, the rear control panel is disabled. **LOCK SYNC** appears on the rear control panel.


≥ Using the Rear Climate Control System From the Front Panel



Press the **REAR LOCK** button to turn the rear lock mode on and off.

While the rear lock mode is on, the rear control panel is disabled.

The **LOCK** indicator will come on.

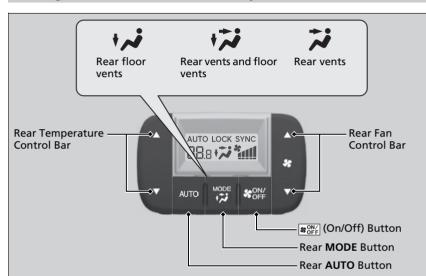

Using the Rear Climate Control System From the Rear Panel


Using the Rear Climate Control System From the Rear Panel

When the rear lock mode is off, the temperature of the rear passenger compartment can be controlled independently.

Use the system when the engine is running.

- 1. Press the AUTO button.
- 2. Adjust the interior temperature using the rear temperature control bar.
- **3.** To turn off the rear climate control system, press score^{ON}_{FF} button.

Automatic Climate Control Sensors

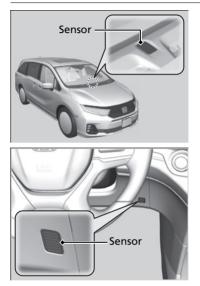

The automatic climate control system is equipped with sensors. Do not cover or spill any liquid on them. This page intentionally left blank.

Features

This chapter describes how to operate technology features.

Audio System

About Your Audio System	244
USB Ports	245
Audio System Theft Protection	247
Audio Remote Controls	248
Audio System Basic Operation	251
Start Up	252
Audio/Information Screen	253
System Updates	265
Adjusting the Sound	
Display Setup	
Voice Control Operation	274
Playing AM/FM Radio	


Playing SiriusXM [®] Radio [*] Music Playback via Wired Connection	
Music Playback via USB Flash Drive	
Playing <i>Bluetooth</i> ® Audio	298
HondaLink [®]	
Smart Shortcuts	305
Wi-Fi Connection	308
AT&T Hotspot *	309
Apple CarPlay	311
Android Auto [™]	318
Audio Error Messages	325
General Information on the Audio System	.326
Rear Entertainment System*	348

Customized Features	354
Bluetooth® HandsFreeLink®	370
Refuel Recommend	387
CabinWatch®*	388
CabinTalk [®]	389

About Your Audio System

The audio system features AM/FM radio and SiriusXM[®] Radio^{*} service. It can also play USB flash drives, iPod, iPhone and *Bluetooth*[®] devices.

You can operate the audio system from the buttons and knob on the panel, the remote controls on the steering wheel, or the icons on the touchscreen interface.

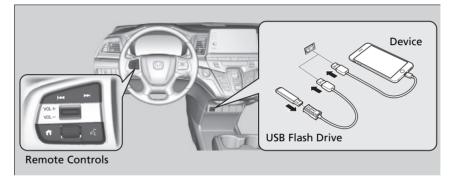

➢About Your Audio System

State or local laws may prohibit the operation of handheld electronic devices while operating a vehicle.

SiriusXM[®] Radio^{*} is available on a subscription basis only. For more information on SiriusXM[®] Radio^{*}, contact a dealer.

General Information on the Audio System P. 326

SiriusXM® Radio* is available in the United States and Canada, except Hawaii, Alaska, and Puerto Rico.

SiriusXM $^{\otimes *}$ is a registered trademark of SiriusXM Radio*, Inc.

USB Ports

Install the USB connector or the USB flash drive to the USB port.



■ USB charging/connector port (← ←) The USB port (2.5A) is for charging devices, playing audio files, and connecting compatible phones with Apple CarPlay or Android Auto.

► To prevent any potential issues, be sure to use an Apple MFi Certified Lightning Connector for Apple CarPlay. For Android Auto, the USB cables should be certified by USB-IF to be compliant with USB 2.0 Standard.

USB charging port (

The USB port (2.5A/3.0A) is only for charging devices.

You cannot play music even if you have connected music players to it.

≫USB Ports

- Do not leave the iPod or USB flash drive in the vehicle. Direct sunlight and high temperatures may damage it.
- We recommend that you use a USB cable if you are attaching a USB flash drive to the USB port.
- Do not connect the iPod or USB flash drive using a hub.
- Do not use a device such as a card reader or hard disk drive, as the device or your files may be damaged.
- We recommend backing up your data before using the device in your vehicle.
- Displayed messages may vary depending on the device model and software version.


USB charge

The USB port can supply up to 2.5A/3.0A of power. It does not output 2.5A/3.0A unless the device requests.

For amperage details, read the operating manual of the device that needs to be charged.

Under certain conditions, a device connected to the port may generate noise to the radio station you are listening to.

* Not available on all models

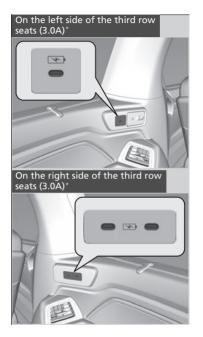

Audio System Theft Protection


The audio system is disabled when it is disconnected from the power source, such as when the battery is disconnected or goes dead. In certain conditions, the system may display a code entry screen. If this occurs, reactivate the audio system.

Reactivating the audio system

- **1.** Set the power mode to ON.
- 2. Turn on the audio system.
- **3.** Press and hold the **VOL**/ **(b) AUDIO** (Volume/Power) knob for more than two seconds.
 - ▶ The audio system is reactivated when the audio control unit establishes a connection with the vehicle control unit. If the control unit fails to recognize the audio unit, you must go to a dealer and have the audio unit checked.

Audio Remote Controls

Allow you to operate the audio system while driving. The information is shown on the driver information interface.



VOL +/VOL (Volume) Switch Press Up: To increase the volume. Press Down: To decrease the volume. ➢Audio Remote Controls

Some modes appear only when an appropriate device or medium is used.

Depending on the *Bluetooth*[®] device you connect, some functions may not be available.

Press the (Home) button to go back to the home screen of the driver information interface.

[◀◀/▶▶] (Seek/Skip) Buttons

• When listening to the radio

Press I: To select the next preset radio station.

Press I To select the previous preset radio station.

Press and hold I: To select the next strong station.

- When listening to a wired connection, USB flash drive, *Bluetooth*[®] Audio, or Smartphone Connection

Press I: To skip to the next song.

- **Press I** To go back to the beginning of the current or previous song.
- When listening to a USB flash drive

Press and hold I To skip to the next folder.

Press and hold I To go back to the previous folder.


Left Selector Wheel

• When selecting the audio mode

Press the (Home) button, then roll up or down to select **Audio** on the driver information interface, and then press the left selector wheel.

Roll up or down:

To cycle through the audio modes, roll up or down and then press the left selector wheel:

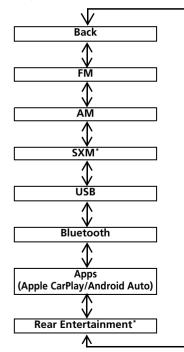

To use the audio system function, the power mode must be in ACCESSORY or ON.

BACK (Back) Button	
HOME (Home) Button	
0	
(Seek/Track) Buttons	

(Home) button: Press to go to the home screen.

Using the audio/information screen
 P. 253
 BACK (Back) button: Press to go back to the previous screen.

(Seek/Track) buttons: Press to change songs.

Start Up

The 9-in. Color Touchscreen starts automatically when you set the power mode to ACCESSORY or ON. At start-up, the following screen about the data upload will be displayed.

			Discla	imer			
vehicl permi This v vehicl	e. Use ti t. For fu ehicle n e usage	information	m only v tails see ploading tion.	vhen traf your ow data incl	fic conc ner's ma uding k	litions	d
					ata Shai	ring	
		_					
				_			
		Cor	anact N		ice		
Turn	ON Blue			ew Dev	ice		
		Cor tooth on t	he device		ice		
Sean Visit	h for "He the webs	tooth on t	he device ssey" r owner's				
Sean Visit	h for "He the webs	tooth on t onda Odys site in you	he device ssey" r owner's es.				
Sean Visit	:h for "He the web: f compat	tooth on t onda Odys site in you	he device ssey" r owner's es. Do not si	manual fo			

Select **OK**.

- If you want to change the settings for data upload, select Data Sharing, then select the ON/OFF settings on the Data Sharing Setting screen.
- ► If you do not select **OK**, the system will automatically be switched to the home screen after a certain period of time.
- If there is no registered device, select OK and the *Bluetooth*[®] pairing screen will be displayed.

■ To pair a cell phone (when there is no phone paired to the system)

- **1.** Make sure your phone is in search or discoverable mode.
- 2. Select Honda Odyssey from your phone.
 - If you want to pair a phone from this 9-in. Color Touchscreen, select Search for Devices, and then select your phone when it appears on the list.
 - If you check the box with Do not show this again, this screen will not be displayed.

≫Start Up


Data Sharing Setting ON: Data communication available. OFF: Data communication unavailable.

Audio/Information Screen

Displays the audio status and wallpaper. From this display, you can go to various setup options.

Switching the Display

■ Using the audio/information screen

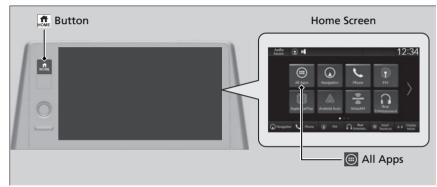

Press the 📠 button to go to the home screen.

Select the following icons on the home screen or after selecting
All Apps.

Phone

Displays the HFL information.

Bluetooth[®] HandsFreeLink[®] P. 370

FM/AM/SiriusXM*/USB/Bluetooth Audio

Displays the audio information for each.

▶ Using the audio/information screen

Touchscreen operation

- Use simple gestures including touching, swiping and scrolling to operate certain audio functions.
- Some items may be grayed out during driving to reduce the potential for distraction.
- You can select them when the vehicle is stopped, or use voice commands.
- Wearing gloves may limit or prevent touchscreen response.

General Settings

Navigation*
 Displays the navigation screen.
 Refer to the Navigation System Manual

HondaLink®

■ Apple CarPlay/Android Auto
 Displays Apple CarPlay or Android Auto.
 ■ Apple CarPlay P. 311
 ■ Android Auto™ P. 318

Vehicle Settings

Displays the vehicle settings screen. ■ Customized Features P. 354

Trip Computer

Displays the trip computer information.

- Current Drive tab: Displays the current trip information.
- Trip A/Trip B tab: Displays information for the current and three previous drives.

The information is stored every time you reset Trip A/B.

To reset the Trip A/B, select **Settings**, then select **Delete Trip History**.

To change the setting of how to reset Trip A/B, select Settings, then select "Trip A"

Reset Timing or "Trip B" Reset Timing.

System Updates

Updates the software version of the audio system. System Updates P. 265

■ Clock Displays the clock.

■ Smart Shortcuts
Displays the Smart Shortcuts screen.
Smart Shortcuts P. 305

Display Mode Displays the brightness bar.

Compass*

Displays the compass screen.

■ CabinTalk Displays the CabinTalk screen. ■ CabinTalk® P. 389

■ CabinWatch*
 Displays the CabinWatch screen.
 ■ CabinWatch®* P. 388

■ Rear Entertainment* Displays the rear entertainment screen.

Rear Entertainment System* P. 348

AT&T Hotspot*

Displays the AT&T Hotspot screen. **■** AT&T Hotspot* P. 309

Wallpaper Setup

You can change, store, and delete the wallpaper on the audio/information screen.

Import wallpaper

You can import up to 11 images, one at a time, for wallpaper from a USB flash drive.

Clock Faces Define Photox Define P

ld More			
			942
ок		Cancel	
		<u>.</u>	

- **1.** Connect the USB flash drive to the USB port.
 - DSB Ports P. 245
- 2. Press the 👬 button.
- 3. Select Clock.
- 4. Select Settings.
- 5. Select Clock Faces.
- 6. Select Add More.
- ► The image of the pictures stored in the USB flash drive is displayed on the list.
- 7. Select a desired picture to import.
- Multiple pictures can be selected at the same time.
- 8. Select OK.
 - ► The selected pictures are displayed.
- 9. Select Transfer.
 - It will return to the clock wallpaper setting screen.

≫Wallpaper Setup

The wallpaper you set up on **Clock Faces** cannot be displayed on the driver information interface.

- When importing wallpaper files, the image must be in the USB flash drive's root directory. Images in a folder cannot be imported.
- The file name must be less than 64 bytes.
- The file format of the image that can be imported is BMP (bmp) or JPEG (jpg).
- The individual file size limit is 10 MB.
- The maximum image size is 4,096 × 2,304 pixels. If the image size is less than 1,280 × 720 pixels, the image is displayed in the middle of the screen with the extra area appearing in black.
- If the USB flash drive does not have any pictures, the **No files detected** message appears.

Refer to the following for more information on compatible USB flash drives.

Compatible iPod, iPhone, and USB Flash Drives P. 327

Select wallpaper

- **1.** Press the totton.
- 2. Select Clock.
- 3. Select Settings.
- 4. Select Clock Faces.
- 5. Select a desired picture to set.
 - ▶ The preview is displayed on the screen.
- 6. Select Save.
 - ▶ The clock screen with which the wallpaper has been set is displayed.

To view wallpaper once it is set

- 1. Press the 💏 button.
- 2. Select Clock.

Delete wallpaper


- **1.** Press the 📠 button.
- 2. Select Clock.
- 3. Select Settings.
- 4. Select Clock Faces.
- 5. Select Delete Photos.
- 6. Select a desired picture to delete.
 - ▶ Multiple pictures can be selected at the same time.
- 7. Select OK.
 - ► The selected pictures are displayed.
- 8. Select Delete.
 - ▶ It will return to the clock wallpaper setting screen.

■Wallpaper Setup

You cannot delete the initial imported wallpapers.

Home Screen

To move to the next screen

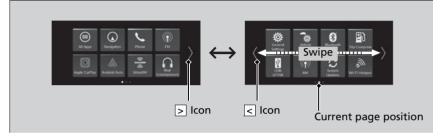

Selecting < or >, or swiping the screen left or right changes to the next screen.


➢Home Screen

The home screen can contain up to 6 pages.

Press the the button to go directly back to the first page of the home screen from any page.

■ To add app icons on the home screen

App icons can be added on the home screen.



- **1.** Press the totton.
- 2. Select All Apps.
- **3.** Select the box checked on the desired apps.

∑To add app icons on the home screen

Pre-installed apps may not start up normally. If this occurs, you need to reset the system.

Defaulting All the Settings P. 369

If you perform **Factory Data Reset**, it may reset all the settings to their factory default.

Defaulting All the Settings P. 369

In case those apps still do not startup normally even after **Factory Data Reset**, contact your dealer.

To move icons on the home screen

You can change icon locations on the home screen.



- **1.** Press the **m** button.
- 2. Select and hold an icon.
 - The screen switches to the customization screen.

- **3.** Drag and drop the icon to where you want it to be.
- 4. Select Done.
 - The screen will return to the home screen.

≥To move icons on the home screen

Select **Tips** to show tips. To hide them, select it again.

■ To remove icons on the home screen

You can delete the icons on the home screen.



- **1.** Press the totton.
- 2. Select and hold an icon.
 - The screen switches to the customization screen.

- **3.** Drag and drop the icon you want to remove to the header area.
 - The icon is removed from the home screen.
- 4. Select Done.
 - The screen will return to the home screen.

≥To remove icons on the home screen

You cannot delete the **All Apps** icon.

Apps will not be deleted by deleting the icon on the home screen.

Select **Tips** to show tips. To hide them, select it again.

■ To shortcut icons on the home screen

You can store up to six icons on the bottom of the home screen.



- 1. Press the 🏦 button.
- 2. Select and hold an icon.
 - The screen switches to the customization screen.

- 3. Drag and drop the icon you want to store to the bottom of the home screen.
 The icon is a shortcut.
- 4. Select Done.
 - The screen will return to the home screen.

≥To shortcut icons on the home screen

Select **Tips** to show tips. To hide them, select it again.

Status Area



- **1.** Select the system status icon.
 - The status area appears.
- 2. Select an item to see the details.
- **3.** Press the $\underset{\text{BACK}}{\textcircled{\text{BACK}}}$ button or select the system status icon to close the area.

System Updates

The audio system's firmware can be updated with a Wi-Fi connection or with a USB device.

Models with TCU

The audio system's firmware can be also updated with the telematics control unit (TCU) through the subscription-based service.

How to Update

When the audio system update is available, the notification is shown on the status area. Use the following procedure to update the system.



- **1.** Press the totton.
- 2. Select System Updates.
 - If System Updates is not displayed on
 - the home screen, select 回 All Apps.
 - ► The system will check for updates.
 - ► If the update icon appears on the home screen, select the status icon.
 - Status Area P. 264
- 3. Select Download.
 - ► A notification appears on the screen for the user to accept the download.
- 4. Select Install Now or Install While Vehicle Off.
 - A notification appears on the screen if the update is successful.

➢How to Update

You can update the system via Wi-Fi, but cannot use the captive portal that requires login or agreement to the terms of use on the browser.

Your download will be canceled if:

- Your Wi-Fi connection is severed.
- You stop the engine when the battery is low on power.

Your download will recommence the next time a Wi-Fi connection is established.

For the battery protection, **Install While Vehicle Off** cannot be selected when the battery is low on power. If you want to install the updated data, recharge the battery or select **Install Now**.

System Updates Settings

S	Settings	
	Automatic Download	>
	Version Status	>
	Connection Setup	>
	Automatic Update	Decline >
	Update History	>

The following settings can be set.

- Automatic Download
- Version Status
- Connection Setup
- Automatic Update*
- Update History

Automatic download settings

Use the following procedure to change to the automatic download setting.

- 1. Press the 📠 button.
- 2. Select System Updates.
- 3. Select Settings.
- 4. Select Automatic Download.
- 5. Select the access point, then select Enable.
 - ▶ If you do not want to system update automatically, select **Disable**.

View a version and update status

Use the following procedure to confirm the version and update status.

- 1. Press the 👬 button.
- 2. Select System Updates.
- 3. Select Settings.
- 4. Select Version Status.
- 266 * Not available on all models

Connection setup

Use the following procedure to connect to the Internet via a Wi-Fi network.

- **1.** Press the 🚮 button.
- 2. Select System Updates.
 - ▶ If System Updates is not displayed on the home screen, select i All Apps.
- 3. Select Settings.
- 4. Select Connection Setup.
- 5. Select OK.
- 6. Select an access point from the network list.
 - To connect to a hotspot that is not automatically detected, select Options then Add Network.
- 7. Enter the password.
 - If you check the Use this network to automatically download system updates box, you can set the network to be used for system updates.
- 8. Select Connect.

Automatic update settings*

Use the following procedure to change to the automatic update setting.

- 1. Press the 📠 button.
- 2. Select System Updates.
- 3. Select Settings.
- 4. Select Automatic Update.
- 5. Select Accept.
 - ▶ If you do not want to system update automatically, select **Decline**.

■ View the update history

Use the following procedure to confirm the update history.

- **1.** Press the tot button.
- 2. Select System Updates.

- 3. Select Settings.
- 4. Select Update History.

How to Update Wirelessly

- Wireless connection mode setup
- 1. Press the 📠 button.
- 2. Select System Updates.
- 3. Select Settings.
- 4. Select Connection Setup.
- 5. Select OK.
- 6. Select an access point from the network list.
 - To connect to a hotspot that is not automatically detected, select Options then Add Network.
- 7. Enter the password.
 - If you check the Use this network to automatically download system updates box, you can set the network to be used for system updates.
- 8. Select Connect.

How to update

- 1. Press the 📠 button.
- 2. Select System Updates.
- 3. Select via Wireless.
- 4. Select Download.
 - ► A notification appears on the screen for the user to accept the download.
- 5. Select Install Now or Install While Vehicle Off.
 - A notification appears on the screen if the update is successful.

How to Update with a USB Device

Download the update files from the server

- 1. Press the 📠 button.
- 2. Select System Updates.
- 3. Select Other Methods.
- 4. Select Via USB.
 - ► A notification appears on the screen.
- 5. Connect a USB device into the USB port.
 - The inventory data is copied into the USB device.
 USB Ports P. 245
- 6. Remove the USB device from the USB port.
- 7. Connect the USB device into your computer, and then download the update files.
 - Follow the link to download the required software update files. Refer to https://usb.honda.com for instructions.

Update the audio system

- 1. Press the 📠 button.
- 2. Select System Updates.
- 3. Select Other Methods.
- 4. Select Via USB.
 - A notification appears on the screen.
- 5. Connect the USB device with the update files into the USB port.
 - ► A notification appears on the screen.
 - USB Ports P. 245
- 6. Select Install Now.
 - ► A notification appears on the screen if the update is successful.

➢How to Update with a USB Device

A USB device with a minimum of 8 GB of free space or more is recommended.

Be sure to delete any previous inventory or update files from the USB before starting the USB update process.

Refer to the following for more information on compatible USB flash drives.

Compatible iPod, iPhone, and USB Flash Drives P. 327

Adjusting the Sound

🕸 > Sound

Bass / Treble	>
Center Speaker Volume	\rightarrow
Audio Zones & Balance / Fader	>
DTS Neural Surround	off >
Speed Volume Compensation	>

¥≫	Bass / Treble			Defau
	Treble	● 6	1.	+6
	Midrange	○ -6		+6
	Bass	○ -6		+6

- 1. Press the 📠 button.
- **2.** Select an audio source icon.
- 3. Select Sound.

Select an item from the following choices:

- Bass / Treble: Treble, Midrange, Bass
- Center Speaker Volume*: Center Speaker Volume
- Audio Zones & Balance / Fader*: Driver Only, Front Only, Rear Only, Full Vehicle, Balance, Fader
- Balance / Fader*: Balance, Fader
- DTS Neural Surround*: DTS Neural Surround™
- **Speed Volume Compensation:** Sets the amount of volume increase.

➢Adjusting the Sound

The **Speed Volume Compensation** (SVC) adjusts the volume level based on the vehicle speed. As you go faster, audio volume increases. As you slow down, audio volume decreases.

You can also adjust the sound by the following procedure:

- 1. Press the 👧 button.
- 2. Select General Settings.
- 3. Select Sound.

Audio Zones & Balance / Fader*

You can change where the sound comes from by selecting one of the speaker options below:

- Full Vehicle: All the speakers emit sound.
- **Driver Only:** Only the speaker by the driver's seat emits sound.
- Front Only: Only the front speakers emit sound.
- **Rear Only:** Only the rear speakers emit sound.

To reset each setting for **Bass / Treble**, **Center Speaker Volume**^{*}, **Audio Zones & Balance / Fader**^{*}, **Balance / Fader**^{*}, and **Speed Volume Compensation**, select **Default** on each setting screen.

Display Setup

You can set the screen brightness.

Switching Display Mode Manually



Select **Display Mode**.

- The brightness bar is displayed for a few seconds.
- ▶ Select 💽 or 🛞 to adjust the brightness.

Display Setup

You can adjust the screen brightness by sliding or tapping on the brightness bar.


You can also change the screen brightness on the following procedures:

- 1. Press the 💏 button.
- 2. Select General Settings.
- 3. Select **Display**.
- 4. Select the setting you want.

To reset the settings, select **Default**.

Image Quality	Adjustment	De
Brightness	👀 Din	810
Contrast	O Low	He
Black Level	🗢 Low	He

Selecting an Audio Source

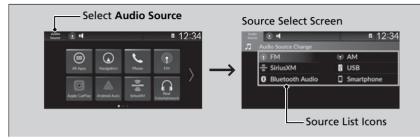

Select **Audio Source** in the header area, then select an icon on the source list to switch the audio source.

Limitations for Manual Operation

Certain manual functions are disabled or inoperable while the vehicle is in motion. You cannot select a grayed-out option until the vehicle is stopped.

Voice Control Operation

Your vehicle has a voice control system that allows hands-free operation. The voice control system uses the $\underline{\mathbb{M}}$ (Talk) button on the steering wheel and a microphone near the map lights on the ceiling.

Voice Recognition

To achieve optimum voice recognition when using the voice control system:

• Make sure the correct screen is displayed for the voice command that you are using.

The system recognizes only certain commands. Available voice commands:

Voice Portal Screen P. 275

- Close the windows and moonroof.
- Adjust the dashboard and side vents so air does not blow onto the microphone on the ceiling.
- Speak clearly in a natural speaking voice without pausing between words.
- Reduce any background noise if possible. The system may misinterpret your command if more than one person is speaking at the same time.

➢Voice Control Operation

When you press the \mathbb{M}_{2}^{2} button, a helpful prompt asks what you would like to do. Press and release the \mathbb{M}_{2}^{2} button again to bypass this prompt and give a command.

➢Voice Recognition

The voice control system can only be used from the driver's seat because the microphone unit removes noises from the front passenger's side.

Voice Portal Screen

ъŚ.	Listening Say an option b		
	📞 Call <name></name>	📞 Call <numbér></numbér>	
	C Enter Address <address></address>	G Find Place <pc< td=""><td>)I></td></pc<>)I>
	🕢 Go Home	Stop Route	
	Play Artist «name»	Tune to SXM <	station>
			Page 1 of 3
Void	e Help Cancel Back	Previous	

When the $\boxed{\texttt{W}}$ (talk) button is pressed, available voice commands appear on the screen.

For a complete list of commands, say "Help" after the beep.

Depending on the selected mode, the displayed commands are different on the voice portal screen. The commands recognized are the same regardless of which screen is selected.

Normal Mode: A list of example commands is displayed to quickly complete your desired function.

Assist Mode: A list of basic commands is displayed to guide you step by step through the voice menu.

You can change the mode on the **General Settings** screen.

Voice Control P. 361

The system only recognizes the commands on the following pages, at certain screens. Free-form voice commands are not recognized.

General Commands

When the voice portal screen is displayed, it will change to the top screen of each function by using the global commands.

- Music Search
- *AM*
- FM
- Sirius XM*
- Navigation*
- Phone

Phone Commands

When the system recognizes a phone command, the screen will change to the dedicated phone voice recognition screen. These commands can only be used when a phone is connected.

Phone Commands

- Call <name>
- Call <number>

The system only recognizes contact names stored in the phonebook of your phone. If a full name is registered in the first name field, the system will recognize the first name and last name as one contact name.

Phone commands are not available if using Apple CarPlay.

Audio Commands

When the system recognizes an audio command, the screen will change to the dedicated audio voice recognition screen.

FM Commands

• Tune to <FM frequency>

AM Commands

• Tune to <AM frequency>

Sirius XM Commands*

- Tune to SXM <channel number>
- Tune to SXM <station name>

iPod Commands

- List Album <name>
- List Artist <name>
- List Genre <name>
- List Playlist <name>
- Play <artist> <album>
- Play
- Play Album <name>
- Play Artist <name>
- Play Genre <name>
- Play Music <text:media_combo>
- Play Playlist <name>
- Play Song <name>

USB Commands

- List Album <name>
- List Artist <name>
- List Playlist <name>
- Play <artist> <album>
- Play
- Play Album <name>
- Play Artist <name>
- *Play Music <text:media_combo>*
- Play Playlist <name>
- Play Song <name>

Navigation Commands*

The screen will change to the navigation screen when a navigation voice command is received.

Refer to the Navigation System Manual

Standard Commands

- Voice Help
- Cancel
- Back


Voice Help provides guidance for the current screen.

List Commands

- Previous
- Next
- Yes
- No

Features

Playing AM/FM Radio

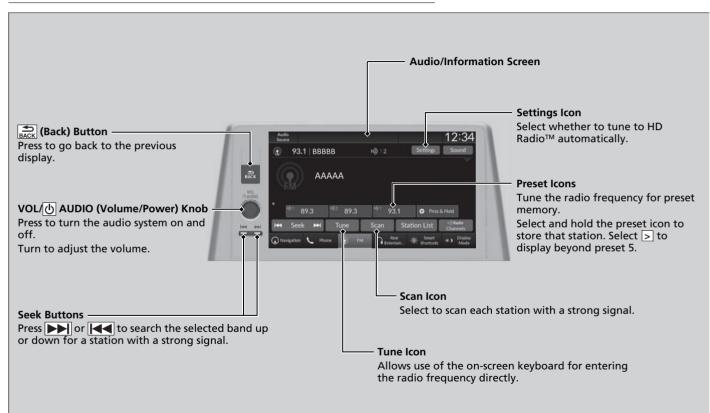

Preset Memory

To store a station:

- **1.** Tune to the selected station.
- 2. Select and hold the preset icon to store that station.
 - Select **Press & Hold** to set a new preset station.

Station List

Lists the strongest stations on the selected band.

- 1. Select Station List to display a list.
- 2. Select the station.

Manual update

Updates your available station list at any time.

- **1.** Select **Station List** to display a list.
- 2. Select Refresh.

🖉 Scan

Samples each of the strongest stations on the selected band for 10 seconds. To turn off scan, select **Stop** or press the $\begin{bmatrix} \bullet \\ \blacksquare ACK \end{bmatrix}$ button.

➢Preset Memory

The **ST** indicator appears on the display indicating stereo FM broadcasts. Stereo reproduction in AM is not available.

Switching the Audio Mode Roll the left selector wheel or select **Audio Source** on the screen.

Audio Remote Controls P. 248

You can store 12 AM/FM stations into preset memory.

HD Subchannel

Displays the subchannel list when an HD Radio[™] station is selected while listening to an FM station.

- 1. Select HD Radio Channels.
- 2. Select the channel number.

Radio Data System (RDS)

Provides text data information related to your selected RDS-capable FM station.

■ To find an RDS station from Station List

- **1.** Select **Station List** to display a list while listening to an FM station.
- 2. Select the station.

Manual update

Updates your available station list at any time.

- **1.** Select **Station List** to display a list while listening to an FM station.
- 2. Select Refresh.

➢HD Subchannel

HD Radio[™] Technology manufactured under license from iBiquity Digital Corporation, a subsidiary of Xperi Inc., U.S. and Foreign Patents. For patents see *https:// xperi.com/hd-radio-patents/. Xperi*, HD Radio, HD, and 'ARC' logos and their respective logos are trademarks or registered trademarks of Xperi Inc. and its subsidiaries in the United States and other countries.



■Radio Data System (RDS)


When you select an RDS-capable FM station, the RDS automatically turns on, and the frequency display changes to the station name. However, when the signals of that station become weak, the display changes from the station name to the frequency.

AM/FM Settings

Change the AM/FM settings.

- 1. Select Settings.
- **2.** Select an option.
- **HD Radio:** Automatically choose a digital or an analog channel, or listen to analog only.
- Artwork: Turns the artwork display on and off.

Playing SiriusXM[®] Radio*

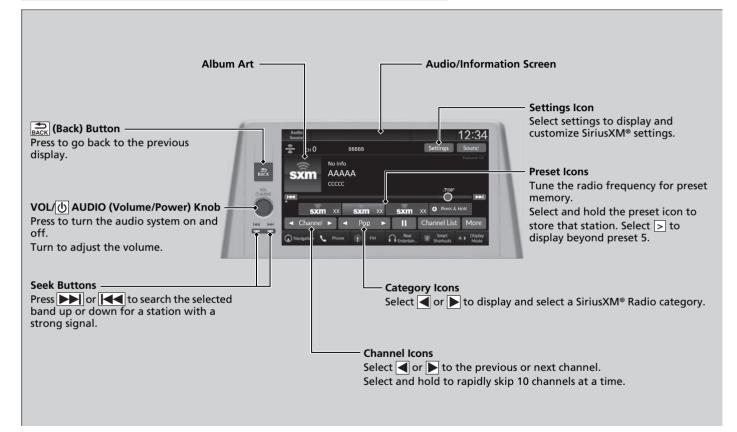

To Change the Tune Mode

- 1. Select Settings.
- 2. Select Tune Mode.
- 3. Select Channel or Category.

Playing SiriusXM® Radio *

In the channel mode, all available channels are selectable. In the category mode, you can select a channel within a category (Jazz, Rock, Classical, etc.).

There may be instances when SiriusXM® Radio does not broadcast all the data fields (artist name, title, etc.). This does not indicate a problem with your audio system.

SiriusXM® Radio stations load in ascending order, which can take about a minute. Once they have loaded you will be able to scroll up or down to make your selections.

Switching the Audio Mode Roll the left selector wheel or select **Audio Source** on the screen.

Audio Remote Controls P. 248

Tune Start:

When you change to a preset channel, a song being played on that channel restarts from the beginning with this function. This can be turned on or off by the following procedure:

- 1. Select Settings.
- 2. Select Tune Start.
- 3. Select ON or OFF.

To change a category, select **Category** icons, or select **More** and then select **Category List**.

Preset Memory

To store a channel:

- **1.** Tune to the selected channel.
- 2. Select and hold the preset icon to store that channel.
 - Select **Press & Hold** to set a new preset station.

Multi-channel preset (for music channels only)

You can store up to 10 of your preferred music channels per preset.



- 1. Tune a station.
- **2.** Select and hold the preset number you want to add a music channel.
- 3. Select Add to TuneMix or Create TuneMix.
 - A message appears if there are no available presets.

➢Playing SiriusXM[®] Radio *

You can store 12 SiriusXM $^{\otimes}$ channels into the preset memory.

Multi-channel preset (for music channels only)

TuneMix^ ${\ensuremath{\mathsf{TM}}}$ is a registered trademark of SiriusXM $^{\ensuremath{\texttt{R}}}$ Radio, Inc.

TuneMix:

The multi-channel preset function can be turned on or off by the following procedure:

- 1. Select Settings.
- 2. Select TuneMix.
- 3. Select **ON** or **OFF**.

When you want to replace the channel, select

Replace Preset.

If you want to delete a channel, select **Edit TuneMix**, and then select the channel you want to delete.

Listening to Featured Channels

Suggested channel listing received from SiriusXM[®] can be displayed and selected.

- 1. Select More.
- 2. Select Category List.
- 3. Select Featured Favorites.
- 4. Select the featured favorite list title you want to listen to.
 - ► The selected channel list of the title is displayed.
- 5. Select the channel.

➢Listening to Featured Channels

Up to 10 featured channels by $\mathsf{Sirius}\mathsf{XM}^{\texttt{0}}$ can be displayed.

To switch the sorting method, select **Number** or **Name** on the upper right of the screen.

Select **Keypad** to use the on-screen keyboard for entering the channel number directly.

Replay Function

The system can record up to the last 60 minutes of your currently tuned channel's broadcast, as well as the last 30 minutes of your preset channel's broadcast, starting from the moment you turn the vehicle on. If you tuned to a preset channel, the system records up to 60 minutes of a broadcast instead of up to 30 minutes. You can rewind and replay the last 30 or 60 minutes of a broadcast.

Move the position you want to replay by selecting et al.

To play or pause on playback mode, select the play/pause icon.

Returning to real-time broadcast Select and hold **FF**.

➢Replay Function

The system starts storing broadcast in memory when the power mode is turned ON. You can go back to the program from that point.

You can no longer replay any program once the power mode is turned off as it erases memory. You can check how long the program has been stored in memory from the audio/information screen.

After 30 or 60 minutes of recording the system will automatically start deleting the oldest data.



When you listen to a multi-channel preset while at the playback mode, the replayed segment is not displayed.

Live Sports Alert

While listening to other channels, you can receive sports alerts such as scores from the games of your favorite teams.

To set up a favorite team

	Favorite Teams	х. Х
A D G J M P T W ₩	+ Add Favorite Team	

1. Select Settings.

2. Select Sports Notifications Setup.

- 3. Select Favorite Teams.
- 4. Select + Add Favorite Team.
- 5. Select a team.

To set up an alert message

- 1. Select Settings.
- 2. Select Sports Notifications Setup.
- 3. Select Notifications.
- 4. Select Game Notifications or SportsFlash Game Play Notifications.
- 5. Select Notifications.
- 6. Select ON.
- 7. Select a favorite team.

Receiving a sports alert

- 1. A pop-up appears and notifies you of a sports alert.
- 2. Select Listen.
 - > You can use the same items as the playback mode pop-up screen.

Replay Function P. 285

To go back to the previous screen, select \otimes .

Live Sports Alert The Pop-up appears and notifies you of a sports alert

function.

Traffic and Weather Information

You can receive traffic and weather information.

■ To set up traffic & weather information

- 1. Select Settings.
- 2. Select Traffic & Weather Now Setup.
- 3. Select Selected City:.
- 4. Select the region.
 - When you do not want to receive the information, select No Market Selected.

Listening to traffic and weather information

- 1. Select the status icon.
- 2. Select the traffic and weather information.
 - Play mode can also use any items the same as playback mode.
 Replay Function P. 285

To go back to the previous screen, select (x).

Traffic and Weather Information

When traffic and weather information is received, a notification is displayed in the header area. Status Area P. 264

Traffic & Weather Now is a registered trademark of SiriusXM® Radio, Inc.

Channel Schedule

You can view a channel schedule or receive an alert when your favorite program is about to start.

To view a channel schedule

Channel Schedule			Кеура
 Prev. 	BBBBB	Next	3
XXXXX			

- 1. Select More.
- 2. Select Channel Schedule.

To set up an alert message

- 1. Select More.
- 2. Select Channel Schedule.
- 3. Select a program.
- 4. Select Set Program Alert.
- 5. Select Just Once or Every Time.

Channel Schedule

Select **Keypad** to use the on-screen keyboard for entering the channel number directly.

≫To set up an alert message

The Pop-up appears and notifies you of an alert function.

Selecting **Just Once** disables the alert feature next time you turn the power mode to ON.

If you want to delete the alert, select **Remove Alert**.

To enable an alert message, change settings for the alert function.

To enable the alert function P. 289

Manage Program Alert

You can change settings for the alert function.

To enable the alert function

∃> Manage Program Alerts	
Alerts Set	>
Notifications	>

- 1. Select Settings.
- 2. Select Manage Program Alerts.
- 3. Select Notifications.
- 4. Select ON or OFF.

To remove an alert

 Alerts Set		
🜲 📴 XX	XXXXX	8
🛝 🔤 XX	XXXXX	8
🜲 🔤 XX	XXXXX	8

- 1. Select Settings.
- 2. Select Manage Program Alerts.
- 3. Select Alerts Set.
- **4.** Select **(a)** on the alert you want to delete.

🔳 Scan

Sample each channel on the selected mode for 10 seconds.

- 1. Select More.
- 2. Select Scan.

You can change a scan mode by the following procedure.

- 1. Select Settings.
- 2. Select Scan Mode.
- 3. Select Channel or Preset.

To turn off scan, select **Stop**.

≫Scan

The "Scan Songs in Presets" function is based on TuneScan[™] technology of SiriusXM[®].

The "Featured Channels" function is based on Featured Favorites[™] technology of SiriusXM[®].

TuneScan[™] and Featured Favorites[™] are registered trademarks of SiriusXM[®] Radio, Inc.

SiriusXM[®] Settings

Change the SiriusXM[®] settings.

- 1. Select Settings.
- 2. Select an option.
- TuneMix: Turns multiple channel mix preset on and off.
- **Tune Mode:** Choose whether to group by category or channel number when changing channels.

To Change the Tune Mode P. 282

- Scan Mode: Select the scan mode from all channels or presets.
 ➡ Scan P. 290
- **Tune Start:** Start the currently playing song at the beginning when you switch to a music channel preset.

Tune Start: P. 282

• **Sports Notifications Setup:** Set to receive sports alerts such as scores from your favorite teams.


Live Sports Alert P. 286

- Traffic & Weather Now Setup: Set to receive traffic and weather information.
 Traffic and Weather Information P. 287
- Manage Program Alerts: Change settings for the alert function.
 Manage Program Alert P. 289

Music Playback via Wired Connection

Using your USB connector, connect the device to the USB port, then select the USB mode.

USB Ports P. 245

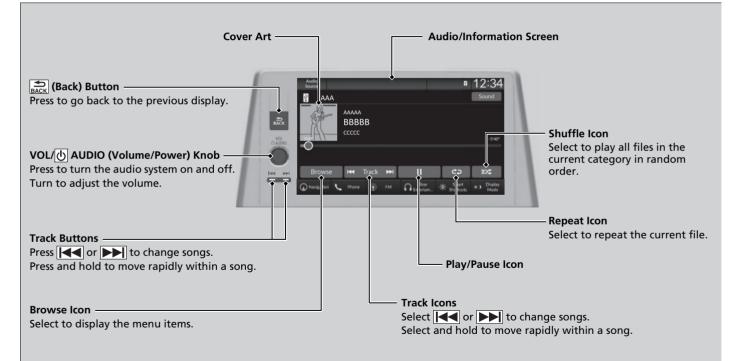

How to Select a Song from the Music Search List

	> Browse	
I	Current Playlist	>
	Playlists	>
ł	Artists	>
	Albums	>
	Songs	>

- 1. Select Browse.
- **2.** Select a search category (e.g., Artists, Albums, etc.).
- **3.** Continue making selections until you find the song of your choice.

Music Playback via Wired Connection

Available operating functions vary on models or versions. Some functions may not be available on the vehicle's audio system.

If there is a problem, you may see an error message on the audio/information screen.


DiPod/USB Flash Drive P. 325

If you operate the music app on your iPhone/iPod while the phone is connected to the audio system, you may no longer be able to operate the same app on the audio/information screen. Reconnect the device if necessary.

If an iPhone or a smartphone is connected via Apple CarPlay or Android Auto, the iPod/USB source will be unavailable and audio files on the phone will be playable only within Apple CarPlay or Android Auto.

How to Select a Play Mode

You can select shuffle and repeat modes when playing a file.



Shuffle/Repeat

Repeatedly select the shuffle or repeat icon until you find a play mode option of your preference.

How to Select a Play Mode

Play Mode Menu Items

Shuffle

Shuffle off: Shuffle mode to off.

Shuffle All Songs: Plays all available songs in a selected list in random order.

Repeat

Repeat off: Repeat mode to off.

10 Repeat Song: Repeats the current song.

C Repeat all: Repeats all songs.

To turn off a play mode


Select the mode you want to turn off.

Music Playback via USB Flash Drive

Your audio system reads and plays sound files on a USB flash drive in either MP3, WMA. AAC^{*1}, FLAC, or WAV format.

Connect your USB flash drive to the USB port, then select the USB mode.

USB Ports P. 245

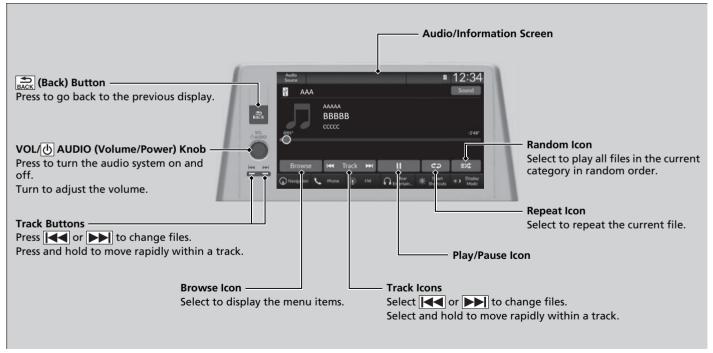

*1:Only AAC format files recorded with iTunes are playable on this unit.

How to Select a File from the Music Search List

2	> Browse	
-	Current Playlist	>
	Playlists	>
d	Artists	>
l	Albums	>
-	Songs	>

1. Select Browse.

- **2.** Select a search category (e.g., Artists, Albums, etc.).
- **3.** Continue making selections until you find the song of your choice.

Music Playback via USB Flash Drive

Use the recommended USB flash drives.

General Information on the Audio System P. 326

WMA files protected by digital rights management (DRM) cannot be played. The audio system displays **Unplayable File**, then skips to the next file.

If there is a problem, you may see an error message on the audio/information screen.

iPod/USB Flash Drive P. 325

Refer to the following for more information on compatible USB flash drives.

Compatible iPod, iPhone, and USB Flash Drives P. 327

How to Select a Play Mode

You can select repeat, and random modes when playing a file.



To turn off a play mode

Select the mode you want to turn off.

Random/Repeat

Repeatedly select the random or repeat icon until you find a play mode option of your preference.

How to Select a Play Mode

Play Mode Menu Items

Random

Random off: Random mode to off.

Random All Tracks: Plays all files in random order.

Random in Folder: Plays all files in the current folder in random order.

Repeat

CO Repeat off: Repeat mode to off.

0 Repeat track: Repeats the current file.


CD Repeat folder: Repeats all files in the current folder.

Playing Bluetooth® Audio

Your audio system allows you to listen to music from your *Bluetooth*-compatible phone.

This function is available when the phone is paired and connected to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system.

Phone Setup P. 375

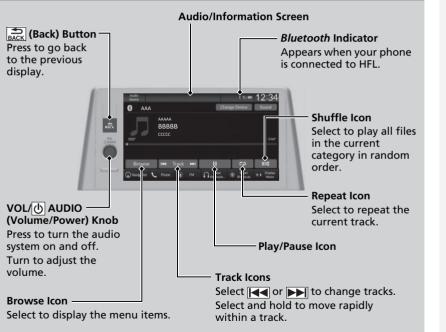

≥Playing Bluetooth[®] Audio

Not all *Bluetooth*-enabled phones with streaming audio capabilities are compatible with the system. For a list of compatible phones:

- U.S.: Visit https://mygarage.honda.com/s/hondahandsfreelink-compatibility-check, or call 1-888-528-7876.
- Canada: Call 1-855-490-7351.

It may be illegal to perform some data device functions while driving.

Only one phone can be used with HFL at a time. When there is more than one paired phone in the vehicle, the system automatically connects to the prioritized phone. You can assign priority to a phone in the Bluetooth[®] device list.

Phone Setup P. 375

The connected phone for *Bluetooth®* Audio can be different.

If more than one phone is paired to the HFL system, there may be a delay before the system begins to play.

In some cases, the name of the artist, album, or track may not appear correctly.

Some functions may not be available on some devices.

If a phone is currently connected via Apple CarPlay or Android Auto, *Bluetooth*[®] Audio from that phone is unavailable. However, a second previously paired phone can stream *Bluetooth*[®] Audio by selecting \square from the *Bluetooth*[®] device list.

Phone Setup P. 375

To Play *Bluetooth*[®] Audio Files



1. Make sure that your phone is paired and connected to the system.

Phone Setup P. 375

2. Select the *Bluetooth*® Audio mode.

If the phone is not recognized, another HFLcompatible phone, which is not compatible for *Bluetooth*[®] Audio, may already be connected.

To Play Bluetooth® Audio Files

To play the audio files, you may need to operate your phone. If so, follow the phone maker's operating instructions.

Switching to another mode pauses the music playing from your phone.

You can change the connected phone by selecting Change Device.

To play or pause a file

Select the play/pause icon.

Searching for Music

> Browse	
My Music	>
Playlists	>
Radio	>
Podcasts	>

1. Select Browse.

2. Select a search category (e.g., Albums).

3. Select an item.▶ The selection begins playing.

Searching for Music ≥

Depending on the *Bluetooth*[®] device you connect, some or all of the lists may not be displayed.

How to Select a Play Mode

You can select shuffle and repeat modes when playing a file.



■ Shuffle/Repeat

Repeatedly select the shuffle or repeat icon until you find a play mode option of your preference.

How to Select a Play Mode

Play Mode Menu Items

Shuffle

Shuffle off: Shuffle mode to off.

Shuffle All Songs: Plays all available songs in a selected list in random order.

Repeat

CO Repeat off: Repeat mode to off.

Oracle Repeat Song: Repeats the current song.

Repeat Group: Repeats the current group.

Repeat all: Repeats all songs.

Depending on the *Bluetooth*[®] device you connect, some or all of the functions may not be displayed.

To turn off a play mode

Select the mode you want to turn off.

HondaLink[®]


HondaLink[®] connects you to the latest information from Honda. You can connect your phone wirelessly through Wi-Fi or *Bluetooth*[®].

- Wi-Fi Connection P. 308
- Phone Setup P. 375

In case of emergency or vehicle trouble, refer to the following.

In Case of Emergency or Vehicle Trouble P. 612

HondaLink[®] Menu

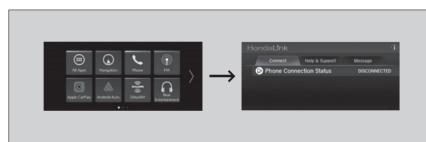

• Connect

Displays the connection status of the vehicle.

• Help & Support

Displays tips for vehicle usage, and gets support via roadside or customer service center.

• Message

Displays helpful and important information from Honda.

≫HondaLink®

The HondaLink[®] connect app is compatible with most iPhone and Android phones.


Some cell phone carriers charge for tethering and smartphone data use. Check your phone's data subscription package.

If there is an active connection to Apple CarPlay or Android Auto, HondaLink® can only be connected through Wi-Fi.

To Set Up to Connect HondaLink[®] Service

Use the following procedure to connect to HondaLink® service.

To enable the HondaLink[®] service

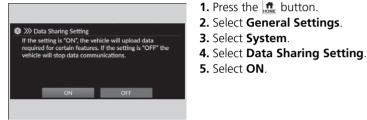

To link with HondaLink®



You can see the connection guide screen after launching HondaLink[®] when there is no connection to a network. If you do not need this guide, select check-box and select **OK**.

Vehicle Information and Message from Honda Tips

You can check the messages that are received quickly in the shortcut operation.



1. A notification appears and notifies you of a new message in the header area.

2. A notification icon is continuously displayed in the header area until the new message is read.



3. Select the system status icon to see the messages.

4. Select a new message to open.

Smart Shortcuts

By observing and learning driver behaviors, patterns, and preferences, the system anticipates driver actions and presents on-screen suggestions to help perform desired actions quicker and with fewer steps.

- The app will suggest actions based on what it learns you do often, and occasionally make recommendations based on your learned preferences.
- The system will take some time to learn. The more you interact with the system, the more suggestion you will see, and the more accurate they will become.
- Suggestions will automatically refresh periodically to provide updated content for each profile.
- You can also provide feedback on whether a suggestion is helpful by pressing and holding on it. This can help the app grow smarter over time.



- To change the notifications behavior for Smart Shortcuts:
- **1.** Select **Options** on the **Smart Shortcuts** screen.
- 2. Select Suggestion Settings.
- 3. Select an option.
- All data used for Smart Shortcuts can be erased by a Factory Data Reset.
 Defaulting All the Settings P. 369

Smart Shortcuts

The app also supports different profiles for each user, with customized learning for each profile. The app will also learn to associate a profile to a user over time based on key fob and connected phone data.

How to Use



1. Press the 🏦 button. 2. Select Smart Shortcuts

3. Select a shortcut to take the action suggested.

- **Call Suggestions:** When selected, a call to the contact or number suggested will be placed and shown. Based on your calling patterns, contacts will be suggested for you to call.
 - Connect your smartphone through *Bluetooth*[®] to get contact suggestions.
 - Call suggestions will not be displayed when you are connected to Apple CarPlay.
- Navigation Suggestions*: When selected, a route will be started to the suggested destination and the embedded navigation app will open.
 - When a long route is set in your navigation system, you can receive recommendations for gas stations and places to stop at along the way.
 - ▶ The places you frequently navigate to while using the embedded navigation system will be suggested as shortcuts.
 - Save your home location in the embedded navigation app to have a shortcut suggestion for it when you're away from home.

How to Use

You can change the profile by selecting on the top of the Smart Shortcuts screen.

You can customize the following items by selecting **Options** on the top of the **Smart Shortcuts** screen.

- Profiles: Create, change, and manage profiles.
- View App Walkthrough: View the Smart Shortcuts walkthrough.
- Suggestion Settings: Change where suggestions can appear.
- License: Shows the license information.

To create a profile:

- 1. Select **Options** on the **Smart Shortcuts** screen.
- 2. Select Profiles.
- 3. Select Manage Profiles.
- Select + Add New Profile.
- 5. Enter name for your profile.
- 6 Select Done
- A new profile has been created and the Smart App will automatically switch to that profile.

To change a profile:

- 1. Select **Options** on the **Smart Shortcuts** screen.
- 2. Select Profiles.
- 3. Select Change Current Profile.
- 4. Select a profile from the list.
- The change to the selected profile has been made.

- **Radio Suggestions:** When selected, the corresponding radio app (FM, AM, or SiriusXM^{®*}) will open and it will start playing the station.
 - From radio apps you can receive:
 - FM, AM, SiriusXM $^{\circledast *}$: Most frequently listened stations you may like to play next.
 - FM, SiriusXM^{®*}: Genre-based suggestions.
 - Considerations:
 - FM suggestions will appear only when they are within range, according to your vehicle's tuner signal.
 - SiriusXM $^{\otimes\,*}$ suggestions will be available as long as there is an active account in the vehicle.

Wi-Fi Connection

This vehicle is equipped with Wi-Fi connectivity. You can connect to an external Wi-Fi hotspot or communication device.

≥Wi-Fi Connection

Wi-Fi and Wi-Fi Direct are registered trademarks of Wi-Fi Alliance[®].



➢Connect the Vehicle to a Wi-Fi Hotspot

You cannot go through the setting procedure while the vehicle is moving. Park in a safe place to set the audio system in Wi-Fi mode.

Some cell phone carriers charge for tethering and smartphone data use. Check your phone's data subscription package.

Check your phone manual to find out if the phone has Wi-Fi connectivity.

You can confirm whether Wi-Fi connection is on or off with the relation on the system status area. Transmission speed and others will not be displayed on this screen.

Connect the Vehicle to a Wi-Fi Hotspot

≱ ≫ Wi-Fi	Options
Change Mode	Network >
a AAAAA	>
BBBBB	>
30000 m	>

>>> AAAAA			
Password			Show passwor
🖌 Use th	is network to auton	natically download syst	tem updates
🖌 Use th	is network to auton	natically download syst	em updates
🖌 Use th	is network to auton	natically download syst	em updates
🖌 Use th	is network to auton	natically download syst	tem updates
Vse th	is network to auton	natically download syst	tem updates

- Press the <u>m</u> button.
 Select General Settings.
- 2. Select General Setting
- 3. Select Connections.
- 4. Select Wi-Fi.
- 5. Select OK.
- 6. Select an access point from the network list.
 - To connect to a hotspot that is not automatically detected, select Options then Add Network.
- 7. Enter the password.
 - If you check the Use this network to automatically download system updates box, you can set the network to be used for system updates.
 - System Updates P. 265
- 8. Select Connect.

Turning off the Wi-Fi connection 1. Select Change Mode.

2. Select OFF.

AT&T Hotspot*

If you have subscribed to AT&T hotspot services, your vehicle will provide data to connect your mobile devices to the Internet. You can use the AT&T Hotspot app to turn vehicle data on/off and monitor data usage left on your subscription.

➢AT&T Hotspot*

To use AT&T Hotspot services, your vehicle must be subscribed to a data plan. If your vehicle is not subscribed to a data plan, you can add vehicle data services at:

U.S.: www.att.com/honda

Canada: https://myvehicle.att.com/#/honda/ learn?country=CA&language=en (English) https://myvehicle.att.com/#/honda/ learn?country=CA&language=fr (French)

Hotspot username and password can be changed in the **Settings** of the AT&T Hotspot app. **Settings** can not be accessed while driving. Park in a safe place to adjust Hotspot settings.

Alternatively, you can use your mobile hotspot to connect the vehicle and other mobile devices to the Internet.

Wi-Fi Connection P. 308

AT&T Wi-Fi Hotspot 2 GB of 2 GB left (100%) 4 Express February 20, 2022 3 Settings Plan Info 2

Hotspot Enable

Turn AT&T Hotspot on/off.

AT&T Hotspot Menu

Plan Info

Shows your current AT&T subscription plan for the vehicle.

Settings

Shows the current username and password for vehicle Hotspot. **Settings** can be changed while the vehicle is not in motion.

4 Refresh

Refreshes screen to show data remaining.

5 Data Usage Bar

Check the current status of your data plan. This Usage Bar will show your current plan and how much data remains on your plan. Subscription plans for AT&T Hotspot can be added/modified at:

U.S.: www.att.com/honda

Canada: https://myvehicle.att.com/#/login

6 Help

Apple CarPlay

If you connect an Apple CarPlay-compatible iPhone to the system via the USB port or wirelessly and the **Apple CarPlay** icon is selected, you can use Apple CarPlay on the audio/information screen.

USB Ports P. 245

Apple CarPlay

The images shown here (designs, specifications, etc.) may differ from what is displayed on your screen.

Only iPhone 5 or newer versions with iOS 8.4 or later are compatible with Apple CarPlay.

We recommend using the latest OS.

Park in a safe place before connecting your iPhone to Apple CarPlay and when launching any compatible apps.

To directly access the Apple CarPlay phone function, select **Phone** on the home screen. While connected to Apple CarPlay, calls are only made through Apple CarPlay. If you want to make a call with HandsFreeLink, turn Apple CarPlay OFF.


When your iPhone is connected to Apple CarPlay, it is not possible to use the *Bluetooth*[®] Audio or *Bluetooth*[®] HandsFreeLink[®]. However, other previously paired phones can stream audio via *Bluetooth*[®] while Apple CarPlay is connected. Phone Setup P. 375

Apple CarPlay and Android Auto cannot run at the same time.

For details on countries and regions where Apple CarPlay is available, as well as information pertaining to function, refer to the Apple homepage.

Apple CarPlay Menu

The following items are only representative examples. More information on displayed applications can be found on your screen.

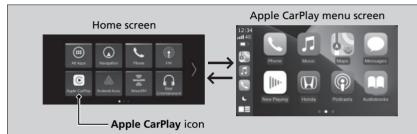

• Phone

Access the contact list, make phone calls, or listen to voicemail.

• Messages

Check and reply to text messages, or have messages read to you.

• Music

Play music stored on your iPhone.

• Maps

Display Apple Maps and use the navigation function just as you would on your iPhone.

Models with navigation system

Only one navigation system (pre-installed navigation or Apple CarPlay) can give directions at a time. When you are using one system, directions to any prior destination set on the other system will be canceled, and the system you are currently using will direct you to your destination.

• Honda

Select the Honda icon to go back to the home screen.

➢Apple CarPlay

Apple CarPlay Operating Requirements & Limitations

Apple CarPlay requires a compatible iPhone with an active cellular connection and data plan. Your carrier's rate plans will apply.

Changes in operating systems, hardware, software, and other technology integral to providing Apple CarPlay functionality, as well as new or revised governmental regulations, may result in a decrease or cessation of Apple CarPlay functionality and services. Honda cannot and does not provide any warranty or guarantee of future Apple CarPlay performance or functionality.

It is possible to use third-party apps if they are compatible with Apple CarPlay. Refer to the Apple homepage for information on compatible apps.

Connecting Apple CarPlay Using the USB Cable to the USB Port

- **1.** Connect the iPhone to the USB port using the USB cable. **■ USB Ports** P. 245
 - ► The confirmation screen will be displayed.

2. Select Yes.

▶ If you do not want to connect Apple CarPlay, select **No**.

You may change the consent settings under the **Smartphone Connection** settings menu.

≫Apple CarPlay

Only initialize Apple CarPlay when you are safely parked.

When Apple CarPlay first detects your iPhone, you will need to set up your iPhone. Refer to the instruction manual that came with your iPhone.

You can use the following procedure to disconnect or delete the devices connecting Apple CarPlay: Press the \square button \rightarrow Select General Settings \rightarrow Smartphone Connection \rightarrow Apple CarPlay \rightarrow Select device.

Use of user and vehicle information

The use and handling of user and vehicle information transmitted to/from your iPhone by Apple CarPlay is governed by the Apple iOS terms and conditions and Apple's Privacy Policy.

Connect Apple CarPlay Wirelessly

- Connect Apple CarPlay wirelessly on the home screen
- **1.** Press the totton.
- 2. Select Apple CarPlay.
- 3. Select + Connect New Device.
- **4.** Pair the iPhone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system. **▶** Phone Setup P. 375
- 5. Select Yes.
 - If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 6. Select Yes or No.

Connect Apple CarPlay wirelessly on the Apple CarPlay device list

- 1. Press the 📠 button.
- 2. Select General Settings.
- 3. Select Smartphone Connection.
- 4. Select Apple CarPlay.
- 5. Select + Connect New Device.
- 6. Pair the iPhone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system. ▶ Phone Setup P. 375
- 7. Select Yes.
 - If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 8. Select Yes or No.

Connect Apple CarPlay wirelessly on the *Bluetooth*[®] device list

- 1. Press the 🚮 button.
- 2. Select General Settings.
- 3. Select Connections.
- 4. Select Bluetooth.
- 5. Select + Connect New Device.
- 6. Pair the iPhone to the vehicle's *Bluetooth*® HandsFreeLink® (HFL) system.

Phone Setup P. 375

- 7. Check the box on Apple CarPlay.
 - ▶ If you select Apple CarPlay, you cannot select Audio and Phone.
- 8. Select Connect.
- 9. Select Yes.
 - ▶ If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 10. Select Yes or No.

Connect Apple CarPlay wirelessly with the steering wheel

- **1.** Press and hold the $\underline{\mathbb{M}}$ (talk) button on the steering wheel.
- 2. Pair the iPhone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system. ▶ Phone Setup P. 375
- 3. Check the box on Apple CarPlay.
 - If you select Apple CarPlay, you cannot select Audio and Phone.
- 4. Select Connect.
- 5. Select Yes.
 - If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 6. Select Yes or No.

■ Connect Apple CarPlay wirelessly at start-up (when there is no phone paired to the system)

- **1.** Set the power mode to ACCESSORY or ON.
- 2. Select OK.
 - ▶ If there is no registered device, the *Bluetooth*[®] pairing screen will be displayed.
 - ▶ If you check the box with **Do not show this again**, this screen will not be displayed.
- 3. Pair the iPhone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system.
 - Phone Setup P. 375
- 4. Check the box on Apple CarPlay.
 - ▶ If you select **Apple CarPlay**, you cannot select **Audio** and **Phone**.
- 5. Select Connect.
- 6. Select Yes.
 - If your iPhone asks for permission to accept an Apple CarPlay connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 7. Select Yes or No.

Operating Apple CarPlay with Siri

Press and hold the 🔬 (talk) button to activate Siri.



Derating Apple CarPlay with Siri

Below are examples of questions and commands for Siri.

- What movies are playing today?
- Call dad at work.
- What song is this?
- How's the weather tomorrow?
- Read my latest email.
- Find a table for four tonight in Chicago.

For more information, please visit www.apple.com/ios/siri.

Android Auto™

When you connect an AndroidTM phone to the audio system via the USB port or wirelessly and the **Android Auto** icon is selected, you can use Android Auto on the audio/information screen.

We recommend that you complete this tutorial while safely parked before using Android Auto.

USB Ports P. 245

Mandroid Auto™

The images shown here (designs, specifications, etc.) may differ from what is displayed on your screen.

We recommend that you update Android OS to the latest version when using Android Auto. *Bluetooth* A2DP cannot be used while your phone is connected to Android Auto.

To use Android Auto on a smartphone with Android 9.0 (Pie) or earlier, you need to download the Android Auto app from Google Play to your smartphone.

Park in a safe place before connecting your Android phone to Android Auto and when launching any compatible apps.

When your Android phone is connected to Android Auto, it is not possible to use the *Bluetooth®* Audio. However, other previously paired phones can stream audio via *Bluetooth®* while Android Auto is connected.


Phone Setup P. 375

Apple CarPlay and Android Auto cannot run at the same time.

Android and Android Auto are trademarks of Google LLC.

Android Auto Menu

The following items are only representative examples. More information on displayed applications can be found on your screen.

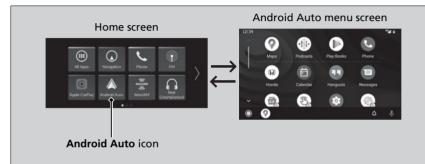

• Maps

Display Google Maps and use the navigation function just as you would with your Android phone. When the vehicle is in motion, it is not possible to make keyboard entries. Stop the vehicle in a safe location to undertake a search or provide other inputs.

Phone

Make and receive phone calls as well as listen to voicemail.

• Honda

Select the Honda icon to go back to the audio screen.

■Android Auto[™]

For details on countries and regions where Android Auto is available, as well as information pertaining to function, refer to the Android Auto homepage.

Screens may differ depending on the version of the Android Auto app you are using.

Android Auto Operating Requirements & Limitations

Android Auto requires a compatible Android phone with an active cellular connection and data plan. Your carrier's rate plans will apply.

Changes in operating systems, hardware, software, and other technology integral to providing Android Auto functionality, as well as new or revised governmental regulations, may result in a decrease or cessation of Android Auto functionality and services. Honda cannot and does not provide any warranty or guarantee of future Android Auto performance or functionality.

It is possible to use third-party apps if they are compatible with Android Auto. Refer to the Android Auto homepage for information on compatible apps.

Connecting Android Auto Using the USB Cable to the USB Port

- 1. Connect the Android phone to the USB port using the USB cable. ➡ USB Ports P. 245
 - ► The confirmation screen will be displayed.
- 2. Select Yes.
 - If you do not want to connect Android Auto, select No.

You may change the consent settings under the **Smartphone Connection** settings menu.

Mandroid Auto™

Only initialize Android Auto when you are safely parked. When Android Auto first detects your phone, you will need to set up your phone so that auto pairing is possible. Refer to the instruction manual that came with your phone.

You can use the following procedure to disconnect or delete the devices connecting Android Auto after you have completed the initial setup: Press the $\widehat{\mathbf{m}}$ button \rightarrow Select General Settings \rightarrow Smartphone Connection \rightarrow Android Auto \rightarrow Select device.

Use of user and vehicle information

The use and handling of user and vehicle information transmitted to/from your phone by Android Auto is governed by Google's Privacy Policy.

Connect Android Auto Wirelessly

- Connect Android Auto wirelessly on the home screen
- **1.** Press the \mathbf{n}_{HME} button.
- 2. Select Android Auto.
- 3. Select + Connect New Device.
- **4.** Pair the Android phone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system. ▶ Phone Setup P. 375
- 5. Select Yes.
 - If your Android phone asks for permission to accept an Android Auto connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 6. Select Yes or No.

Connect Android Auto wirelessly on the Android Auto device list

- 1. Press the 📠 button.
- 2. Select General Settings.
- 3. Select Smartphone Connection.
- 4. Select Android Auto.
- 5. Select + Connect New Device.
- 6. Pair the Android phone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system. ▶ Phone Setup P. 375
- 7. Select Yes
 - If your Android phone asks for permission to accept an Android Auto connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 8. Select Yes or No.

Connect Android Auto wirelessly on the *Bluetooth*[®] device list

- 1. Press the 📠 button.
- 2. Select General Settings.
- 3. Select Connections.
- 4. Select Bluetooth.
- 5. Select + Connect New Device.
- 6. Pair the Android phone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system. ▶ Phone Setup P. 375
- 7. Check the box on Android Auto.
 - ▶ If you select Android Auto, you cannot select Audio and Phone.
- 8. Select Connect.
- 9. Select Yes.
 - If your Android phone asks for permission to accept an Android Auto connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 10. Select Yes or No.

Connect Android Auto wirelessly with the steering wheel

- **1.** Press and hold the $\fbox{(talk)}$ (talk) button on the steering wheel.
- 2. Pair the Android phone to the vehicle's *Bluetooth*[®] HandsFreeLink[®] (HFL) system. ▶ Phone Setup P. 375
- 3. Check the box on Android Auto.
 - ▶ If you select Android Auto, you cannot select Audio and Phone.
- 4. Select Connect.
- 5. Select Yes.
 - If your Android phone asks for permission to accept an Android Auto connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 6. Select Yes or No.

■ Connect Android Auto wirelessly at start-up (when there is no phone paired to the system)

1. Set the power mode to ACCESSORY or ON.

2. Select OK.

- ▶ If there is no registered device, the *Bluetooth*[®] pairing screen will be displayed.
- If you check the box with **Do not show this again**, this screen will not be displayed.
- 3. Pair the Android phone to the vehicle's *Bluetooth®* HandsFreeLink® (HFL) system.

Phone Setup P. 375

- 4. Check the box on Android Auto.
 - ▶ If you select Android Auto, you cannot select Audio and Phone.
- 5. Select Connect.
- 6. Select Yes
 - If your Android phone asks for permission to accept an Android Auto connection, accept to connect. A confirmation message for HondaLink Assist appears.
- 7. Select Yes or No.

Operating Android Auto with Voice Recognition

Press and hold the 🖟 (talk) button to operate Android Auto with your voice.



Departing Android Auto with Voice Recognition

Below are examples of commands you can give with voice recognition:

- Reply to text.
- Call my wife.
- Navigate to Honda.
- Play my music.
- Send a text message to my wife.
- Call flower shop.

For more information, please refer to the Android Auto homepage.

standard voice recognition system.

iPod/USB Flash Drive

If an error occurs while playing an iPod or USB flash drive, you may see the following error messages. If you cannot clear the error message, contact a dealer.

Error Message	Solution
Connect Retry	Appears when the system does not acknowledge the iPod. Reconnect the iPod.
Unplayable File	Appears when the files in the USB flash drive are copyright protected or an unsupported format. This error message appears for about a few seconds, then plays the next file.
No Data	 iPod Appears when the iPod is empty. USB flash drive Appears when the USB flash drive is empty or there are no MP3, WMA, AAC, FLAC, or WAV files in the USB flash drive. iPod and USB flash drive Check that compatible files are stored on the device.
Unsupported	Appears when an unsupported device is connected. If it appears when a supported device is connected, reconnect the device.
Device No Response	Appears when the system does not communicate with a connected device. If it appears when a device is connected, contact your place of device purchase.
USB hub not supported	Appears when only a HUB is connected. If it appears, connect a USB flash drive to the HUB.
A charging error has occurred with the connected USB device. When safe please check the compatibility of the device and USB cable and try again.	Appears when an incompatible device is connected. Disconnect the device. Then, turn the audio system off and turn it on again. Do not reconnect the device that caused the error.

SiriusXM[®] Radio Service*

Subscribing to SiriusXM[®] Radio

- **1.** You need your radio ID ready before registering for subscription. To see the ID on the screen, select **Channel** 0.
- 2. Have your radio ID ready, and either call or visit the SiriusXM[®] website to subscribe.

Receiving SiriusXM[®] Radio

Switch to the SiriusXM[®] mode by using the audio remote controls on the steering wheel, or through the audio/information screen, and stay in this mode for about 30 minutes until the service is activated. Make sure your vehicle is in an open area with good reception.

SiriusXM[®] Radio Display Messages

Channel **** is not subscribed. Call SiriusXM to subscribe.*1

You are not subscribed to the channel selected.

Subscription Updated:

SiriusXM® radio is receiving information update from the network.

Channel Not Available:

No such channel exists, or the artist or title information is unavailable.

No Signal:

The signal is too weak in the current location.

Check Tuner:

There is a problem with the SiriusXM[®] tuner. Contact a dealer.

Antenna Disconnected, Antenna Shorted:

There is a problem with the SiriusXM® antenna. Contact a dealer.

*1: **** part is variable characters, and will change depending upon the channel selected.

Subscribing to SiriusXM[®] Radio Contact Information for SiriusXM[®] Radio:

- U.S.: SiriusXM[®] Radio at *www.siriusxm.com/* subscribenow, or 1-866-635-2349
- Canada: SiriusXM® Canada at www.siriusxm.ca/ subscribe-now, or 1-877-209-0079

➢Receiving SiriusXM[®] Radio

The SiriusXM® satellites are in orbit over the equator; therefore, objects south of the vehicle may cause satellite reception interruptions. Satellite signals are more likely to be blocked by tall buildings and mountains the farther north you travel from the equator.

You may experience reception problems under the following circumstances:

- In a location with an obstruction to the south of your vehicle.
- In tunnels
- On the lower level of a multi-tiered road
- Large items carried on the roof rack

Compatible iPod, iPhone, and USB Flash Drives

iPod and iPhone Model Compatibility

Model

Made for iPod touch (6th to 7th generation)

Made for iPhone 5s/iPhone 6/iPhone 6 Plus/iPhone 6S/iPhone 6S Plus/iPhone SE/ iPhone 7/iPhone 7 Plus/iPhone 8/iPhone 8 Plus/iPhone X/iPhone XS/iPhone XS Max/ iPhone XR/iPhone 11/iPhone 11 Pro/iPhone 11 Pro Max/iPhone SE (2nd generation)/ iPhone 12/iPhone 12 Pro/iPhone 12 Pro Max/iPhone 12 mini/iPhone 13/iPhone 13 Pro/iPhone 13 Pro Max/iPhone 13 mini/iPhone 14/iPhone 14 Plus/iPhone 14 Pro/ iPhone 14 Pro Max

USB Flash Drives

Please use a recommended USB flash drive of 256MB or higher formatted with FAT16 or FAT32.

- Some digital audio players may not be compatible.
- Some USB flash drives (e.g., a device with security lockout) may not work.
- Some software files may not allow for audio play or text data display.
- Some versions of MP3, WMA, AAC, FLAC, or WAV formats may be unsupported.

➢iPod and iPhone Model Compatibility

This system may not work with all software versions of these devices.

The Lightning connector works with iPhone 5s, iPhone 6, iPhone 6 Plus, iPhone 6S, iPhone 6S Plus, iPhone SE, iPhone 7, iPhone 7 Plus, iPhone 8, iPhone 8 Plus, iPhone X, iPhone XS, iPhone XS Max, iPhone XR, iPhone 11, iPhone 11 Pro, iPhone 11 Pro Max, iPhone SE (2nd generation), iPhone 12, iPhone 12 Pro, iPhone 12 Pro Max, iPhone 12 mini, iPhone 13, iPhone 13 Pro, iPhone 13 Pro Max, iPhone 13 mini, iPhone 14, iPhone 14 Plus, iPhone 14 Pro, iPhone 14 Pro Max, iPod touch (6th, 7th generation).

USB works with iPhone 5s, iPhone 6, iPhone 6 Plus, iPhone 6S, iPhone 6S Plus, iPhone SE, iPhone 7, iPhone 7 Plus, iPhone 8, iPhone 8 Plus, iPhone X, iPhone XS, iPhone XS Max, iPhone XR, iPhone 11, iPhone 11 Pro, iPhone 11 Pro Max, iPhone SE (2nd generation), iPhone 12, iPhone 12 Pro, iPhone 12 Pro Max, iPhone 12 mini, iPhone 13, iPhone 13 Pro, iPhone 13 Pro Max, iPhone 13 mini, iPhone 14, iPhone 14 Plus, iPhone 14 Pro, iPhone 14 Pro Max, iPod touch (6th, 7th generation).

≥USB Flash Drives

Files on the USB flash drive are played in their stored order. This order may be different from the order displayed on your PC or device.

Honda App License Agreement

END USER LICENSE AGREEMENT

PLEASE CAREFULLY READ THIS END USER LICENSE AGREEMENT (THIS "AGREEMENT") WHICH GOVERNS YOUR USE OF THE SOFTWARE INSTALLED ON YOUR HONDA OR ACURA VEHICLE (YOUR "VEHICLE") AS WELL AS THE APPLICATIONS, SERVICES, FUNCTIONS, AND CONTENT PROVIDED THROUGH THE SOFTWARE (COLLECTIVELY, THE "SERVICES"). YOUR USE OF THE SOFTWARE OR SERVICES WILL SERVE AS YOUR CONSENT TO THE TERMS OF THIS AGREEMENT. THE SOFTWARE IS OWNED (OR LICENSED), PROVIDED, AND/OR OPERATED BY AMERICAN HONDA MOTOR CO. INC., ("HONDA," "US," "WE," OR "OUR"), WITH ITS BUSINESS ADDRESS AT 1919 TORRANCE BLVD., TORRANCE, CA 90501. REFERENCE TO "HONDA" IN THIS AGREEMENT INCLUDES HONDA'S PARENT COMPANY AND ITS AFFILIATES AND DESIGNATED AGENTS. THE SERVICES ARE OWNED (OR LICENSED), PROVIDED, AND/OR OPERATED BY HONDA OR A THIRD-PARTY SERVICE PROVIDER (A "PROVIDER"). REFERENCE TO A "PROVIDER" IN THIS AGREEMENT INCLUDES SUCH PROVIDER'S PARENT COMPANY, AFFILIATES, AND DESIGNATED AGENTS.

A. Description of the Software. The SOFTWARE includes the software, firmware and the like, installed and executing on your VEHICLE during manufacture, and thereafter updated from time to time by HONDA, you or an authorized HONDA dealer (a "DEALER"). The SOFTWARE allows you to access and use a variety of SERVICES, including but not limited to: (a) HONDA applications, services, and content provided through the SOFTWARE (together, "HONDA SERVICES"); and (b) PROVIDER applications, services, and content provided through the SOFTWARE (together, "PROVIDER SERVICES"), each of which may provide access to various information, media, content, and services.

B. SOFTWARE Licensing and Intellectual Property.

1. SOFTWARE. This AGREEMENT grants you a non-exclusive, limited, and revocable license to use the SOFTWARE and SERVICES solely (a) as installed on your VEHICLE by HONDA, (b) as updated on your Vehicle by HONDA, you (but only as and when directed by HONDA), or a DEALER and (c) as permitted under the terms of this AGREEMENT.

2. HONDA Services. The SOFTWARE may provide you with access to various HONDA SERVICES. Installation, activation, or use of HONDA SERVICES may require your consent to additional terms, conditions, and privacy policies applicable to those HONDA SERVICES (the "HONDA TERMS"). You acknowledge and agree that any collection, use, sharing of data generated by your VEHICLE or your use of your VEHICLE, and your use of the HONDA SERVICES shall be subject to this AGREEMENT and any additional HONDA TERMS that may be specifically applicable to such HONDA SERVICES or data generation. The HONDA SERVICES may collect, use, and share such data while you are using the SOFTWARE.

3. Open-Source Software. The SOFTWARE and SERVICES may incorporate software licensed to HONDA under free or open-source licenses which govern HONDA's distribution and your use of such software. HONDA and the third-party authors, licensors, and distributors of such software disclaim all warranties and all liability arising from any and all use or distribution of the software. To the extent such software is provided under terms that differ from the applicable free or open-source licenses, those terms are offered by HONDA alone. Additional information regarding free and open-source software incorporated in the SOFTWARE and SERVICES is available in this manual or within the SOFTWARE.

4. Provider Services. The SOFTWARE may provide you with access to various PROVIDER SERVICES. Installation or use of such PROVIDER SERVICES may require your consent to additional terms, conditions, and privacy policies of the applicable PROVIDER (the "PROVIDER TERMS"). This AGREEMENT restricts the manner in which you can install and use PROVIDER SERVICES but does not grant you a license or permission to use such PROVIDER SERVICES. Your permission to use PROVIDER SERVICES is limited and subject to any license grants, conditions, and limitations included in the PROVIDER TERMS. You acknowledge that any collection, use, sharing of your information, targeted advertising practices by PROVIDERS, and your use of the PROVIDER SERVICES shall be subject to both this AGREEMENT and any applicable PROVIDER TERMS. The PROVIDER SERVICES may collect, use, and share such information while you are using the SOFTWARE.

5. License Limitations and Restrictions on Use.

(a) <u>Limited License</u>. You understand and agree that the SOFTWARE and SERVICES are licensed, not sold, to you solely for use in accordance with this AGREEMENT and any applicable PROVIDER TERMS, and any documentation for the VEHICLE made available to you by HONDA (any "DOCUMENTATION"). HONDA and its licensors reserve all rights in the SOFTWARE and HONDA SERVICES not expressly granted to you under this AGREEMENT. PROVIDERS and their licensors reserve all rights in the PROVIDER SERVICES not expressly granted to you under the applicable PROVIDER TERMS.

(b) <u>Restrictions on Use</u>. The licenses granted under this AGREEMENT do not permit you to use the SOFTWARE or SERVICES on a device other than your VEHICLE. As a condition of using the SOFTWARE and SERVICES, you agree that you may not and will not:

(1) copy, download, distribute, modify, publish, sell, rent, lease, lend, license, sublicense, reuse, or create derivative works of the SOFTWARE or SERVICES or any of the content or other material within the SOFTWARE or SERVICES, including without limitation, HONDA or PROVIDER names, logos, or any other trademarks of HONDA or PROVIDERS or used in association with the SOFTWARE or any SERVICES, except as required to use the SOFTWARE or SERVICES in accordance with this AGREEMENT, any applicable PROVIDER TERMS, and the DOCUMENTATION;

(2) access or use the SOFTWARE or SERVICES in any manner intended to damage or impair the operation of the SOFTWARE or SERVICES or interfere with anyone else's use and enjoyment of the SOFTWARE or SERVICES;

(3) access or attempt to access any system or server on which the SOFTWARE or SERVICES is hosted or modify or alter the SOFTWARE or SERVICES in any way;

(4) use the SOFTWARE or SERVICES for any unlawful purpose, or in violation of any third party rights;

(5) use the SOFTWARE or SERVICES in violation of any applicable traffic regulations, rules or laws, including but not limited to any driver distraction laws, rules or regulations;

(6) violate the terms of this AGREEMENT, any HONDA TERMS, any PROVIDER TERMS or other applicable third-party terms, conditions, and privacy policies; or

(7) reverse engineer, decompile, disassemble, attempt to derive the source code of, nor permit others to reverse engineer, decompile, or disassemble, or attempt to derive the source code of the SOFTWARE or SERVICES, except and only to the extent that such activity is expressly permitted (a) by applicable law notwithstanding this limitation or (b) the terms of applicable free or opensource software licenses.

6. Intellectual Property Rights. All title and intellectual property rights in and to the SOFTWARE and SERVICES, the accompanying DOCUMENTATION, and all copies of the SOFTWARE or SERVICES are owned by HONDA, PROVIDERS, or their suppliers or licensors. This AGREEMENT does not grant you any rights in connection with any trademarks or service marks of HONDA, PROVIDERS, or their licensors, affiliates, or suppliers.

7. Export Restrictions: You acknowledge that the SOFTWARE and SERVICES are subject to U.S., European Union, and other export jurisdictions. You agree to comply with all applicable international and national laws that apply to the SOFTWARE and SERVICES, including the U.S. Export Administration Regulations, as well as end-user, end-use, and destination restrictions issued by the U.S. and other governments.

C. SOFTWARE Operation

1. HONDA reserves the right to suspend or terminate your access to and use of the SOFTWARE or SERVICES if you are found to be in violation of this AGREEMENT or as reasonably deemed necessary by HONDA.

2. <u>Eligibility/Registration/Activation</u>. The SOFTWARE is intended for and available to individuals who (a) are of legal age of majority in their jurisdiction of residence (and at least 18 years of age), or are younger than 18 years of age and possess a valid driver's license issued by their jurisdiction of residence, and (b) own or have permissive access to a compatible VEHICLE. We do not knowingly collect any information, including personal information, from children under 13. If we learn or are notified that we have collected personal information of a child under 13, we will immediately take steps to delete such information.

3. <u>Use of PROVIDER SERVICES through the SOFTWARE.</u> Certain PROVIDER SERVICES made available through the SOFTWARE may require that you register or otherwise have an account with the PROVIDER and agree to PROVIDER TERMS. Any use of any of such PROVIDER SERVICES within the SOFTWARE is subject to this AGREEMENT and the applicable PROVIDER TERMS. HONDA does not exercise control over such PROVIDER SERVICES and is not responsible or liable for the availability, security, or content of such PROVIDER SERVICES, and the inclusion of any PROVIDER SERVICES does not imply a referral from, the approval of, or the endorsement by HONDA of such PROVIDER SERVICES. HONDA is not responsible or liable, directly or indirectly, for any damage relating to or resulting from your use of the PROVIDER SERVICES.</u>

4. Links to Third Party Sites: The SOFTWARE may provide you with the ability to access third-party sites and content through the use of the SOFTWARE or SERVICES. The third-party sites and content are not under the control of HONDA. HONDA is not responsible or liable, directly or indirectly, for such third-party websites and their content or for any damage relating to or resulting from your access or use of such websites and content.

5. <u>Unauthorized Use and Abuse.</u> You are responsible for ensuring your (and any authorized third parties') use of the SOFTWARE and SERVICES remains in compliance with this AGREEMENT and all other applicable HONDA TERMS and PROVIDER TERMS. You acknowledge and agree that any use of the SOFTWARE or SERVICES occurring through your VEHICLE will be deemed your actions and that HONDA and PROVIDERS may rely upon such actions. You agree to immediately notify us if you suspect fraudulent or abusive activity involving the SOFTWARE or SERVICES. If you so notify us or if we otherwise suspect fraudulent or abusive activity, you agree to cooperate with us in any fraud investigation and to use any fraud prevention measures we prescribe. Your failure to immediately notify us or cooperate to use such measures will result in your liability for all fraudulent usage or abusive activity associated with your VEHICLE.

6. <u>SOFTWARE Updates</u>. The SOFTWARE and SERVICES may be updated when your VEHICLE is serviced by a DEALER or remotely, over-theair, by HONDA from time to time; such updates may occur with or without further notice or your future consent. The SOFTWARE may be updated at HONDA's discretion and for any purpose including, without limitation, to patch or otherwise improve the SOFTWARE or SERVICES functionality, security, or stability. All updates to the SOFTWARE and SERVICES are subject to this AGREEMENT and any other applicable HONDA TERMS and PROVIDER TERMS.

7. <u>Uninstalling</u>, <u>Removing</u>, and <u>Replacing the SOFTWARE</u>. Replacing SOFTWARE or HONDA SERVICES with software or firmware not provided and installed by HONDA or a DEALER will render all representations and warranties for the SOFTWARE, HONDA SERVICES, and VEHICLE functionality reliant upon the SOFTWARE or HONDA SERVICES null and void.

D. SOFTWARE Operational Notices and Warnings

1. <u>Vehicle Geolocation Information</u>. You acknowledge that your VEHICLE may be equipped with certain traffic and map features. The traffic feature will automatically collect and transmit, through GPS technology, your Vehicle's current location (longitude and latitude), travel direction and speed ("VEHICLE GEOLOCATION INFORMATION") to HONDA and PROVIDERS. The VEHICLE GEOLOCATION INFORMATION") to HONDA and PROVIDERS. The VEHICLE GEOLOCATION INFORMATION") to HONDA and PROVIDERS. The VEHICLE GEOLOCATION INFORMATION is used by HONDA and PROVIDERS to provide traffic and navigation-related information to you, but may also be used to provide other SERVICES or offers to you. HONDA will not use such VEHICLE GEOLOCATION INFORMATION for its own marketing efforts, or provide such information to unaffiliated third parties for their own purposes, without your express consent.

2. Potential Map Inaccuracy and Route Safety. Maps used by this system may be inaccurate because of changes in roads, traffic controls, routing, or driving conditions. Always use good judgment and common sense when following suggested routes. Do not follow the route suggestions if doing so would result in an unsafe or illegal driving maneuver, if you would be placed in an unsafe situation, or if you would be directed into an area that you consider unsafe. Do not rely on any navigation features included in the system to route you to emergency services. Not all emergency services such as police, fire stations, hospitals, or clinics are likely to be contained in the map database for such navigation features. Ask local authorities or an emergency services operator for such locations and routes. The driver is ultimately responsible for the safe operation of the vehicle and therefore, must evaluate whether it is safe to follow the suggested directions. Any navigation features are provided only as an aid. Make your driving decisions based on your observations of local conditions and existing traffic regulations. Navigation features are not a substitute for your personal judgment. Any route suggestions made by the SOFTWARE or SERVICES should never replace any local traffic regulations or your personal judgment or knowledge of safe driving practices.

3. <u>Speech Recognition</u>: You acknowledge and understand that HONDA and PROVIDERS may record, retain, and use voices commands when you use the speech recognition components of the SOFTWARE or SERVICES. You and all VEHICLE operators and passengers (a) consent to the recording and retention of voice commands in support of providing speech recognition components and (b) release HONDA and PROVIDERS from all claims, liabilities, and losses that may result from any use of such recorded voice commands. Recognition errors are inherent in speech recognition. It is your responsibility to monitor any speech recognition functions included in the system and address any errors. Neither HONDA nor PROVIDERS will be liable for any damages arising out of errors in the speech recognition process.

4. <u>Distraction Hazards.</u> Navigation features may require manual (non-verbal) input or setup. Attempting to perform such set-up or insert data while driving can seriously distract your attention and could cause a crash or other serious consequences; the ability to undertake such interactions may also be limited by state or local law, which laws you are responsible to know and follow. Even occasional short scans of the screen may be hazardous if your attention has been diverted away from your driving at a critical time. Pull over and stop the vehicle in a safe and legal manner before attempting to access a function of the system requiring prolonged attention. Do not raise the volume excessively. Keep the volume at a level where you can still hear outside traffic and emergency signals while driving. Driving while unable to hear these sounds could result in a crash.

E. Information Collection and Storage

1. Information Collection, Use, Transmission and Storage of Data. Consent to Use of Data: You agree that HONDA and PROVIDERS may collect and use your information gathered in any manner as part of product support services related to the SOFTWARE or related services. HONDA may share such information with third parties, including, without limitation, PROVIDERS, third party software and services suppliers, their affiliates and/or their designated agents, solely to improve their products or to provide services or technologies to you. HONDA, third party software and systems suppliers, their affiliates and/or their affiliates and/or their designated agent may disclose this information to others, but not in a form that personally identifies you.

2. <u>Information Storage</u>. Depending on the type of multimedia system you have in your VEHICLE, certain information may be stored for ease of use of the SOFTWARE including, without limitation, search history, location history in certain applications, previous and saved destinations, map locations within certain applications, and device numbers and contact information.

(a) <u>Vehicle Health Information</u>. Your VEHICLE may remotely transmit information regarding the status and health of your VEHICLE ("VEHICLE INFORMATION") to HONDA without notification to you. VEHICLE INFORMATION may contain VEHICLE maintenance and malfunction status that is derived from VEHICLE diagnostic data and includes, but is not limited to, status of powered doors and windows, battery life data, battery charging data, VEHICLE speed, coolant temperature, air compressor revolution, output power, warning codes, diagnostic trouble codes, fuel injection volume, and engine rotations per minute. VEHICLE HEALTH INFORMATION may be used by HONDA for research and development, to deliver HONDA SERVICES and information to you, and to contact you, and is retained only for a period of time necessary to fulfill these goals.

(b) <u>VEHICLE Geolocation Data (non-navigation/map based)</u>. If you opt-in to geolocation-based SERVICES, your vehicle's geolocation data (latitude and longitude) will be automatically sent from your VEHICLE to HONDA and PROVIDERS.

(c) You understand that the inputting or uploading of information to your VEHICLE's multimedia system or the SOFTWARE or SERVICES is at your own risk and that HONDA is not responsible for unauthorized access to or use of any personal or other information. All information uploaded to the SOFTWARE and SERVICES may be stored on your VEHICLES's multimedia system and you understand that the security and safety of your VEHICLE's multimedia system is your sole responsibility. F. NO WARRANTY. You understand and agree that your use of the SOFTWARE and SERVICES are solely at your own risk and that you will be solely responsible for any damage to your VEHICLE's multimedia system or any other equipment or any loss of data that may result from your use of the SOFTWARE or SERVICES. THE SOFTWARE AND SERVICES ARE PROVIDED ON AN "AS IS" AND "AS AVAILABLE" BASIS WITHOUT ANY WARRANTY OF ANY KIND. EXPRESSED. IMPLIED OR STATUTORY. WE SPECIFICALLY DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT. HONDA makes no warranties that the SOFTWARE or SERVICES will meet your requirements, or that the SOFTWARE or SERVICES will be uninterrupted, timely, secure, noninfringing or error free. You understand and agree that you are responsible for any and all charges, costs or expenses associated with your use of the SOFTWARE or SERVICES. Advice or information, whether oral or written, obtained by you from us or through the SOFTWARE or SERVICES are provided for informational purposes only and will not create any warranty not expressly made herein. You should not rely on any such information or advice. We assume no liability or responsibility for any errors or omissions in the SOFTWARE or SERVICES. We do not make any warranty or representation that your use of the material displayed on, or obtained through, the SOFTWARE or SERVICES is non-infringing of any rights of any third party. Any decision or action taken by you on the basis of information or content provided via the application is at your sole discretion and risk. HONDA and PROVIDERS are not responsible or liable for any such decision, or for the accuracy, completeness, usefulness, or availability of any content or information displayed, transmitted, or otherwise made available via the SOFTWARE or SERVICES. To the extent jurisdictions do not allow the exclusion of certain warranties, some of the above exclusions may not apply to you.

G. LIMITATIONS ON LIABILITY. You and HONDA are each waiving important rights.

1. <u>Limitations on YOUR liability</u>. HONDA cannot recover from you any consequential, indirect, incidental, or special damages, or attorney's fees in connection with your use of the SOFTWARE or HONDA SERVICES. HONDA WAIVES TO THE FULLEST EXTENT ALLOWED BY LAW ANY CLAIM FOR DAMAGES OTHER THAN DIRECT, COMPENSATORY DAMAGES AS LIMITED IN THIS AGREEMENT.

2. Limitation on HONDA and PROVIDER liability. Neither HONDA nor PROVIDERS will be liable to you or any other party for consequential, indirect, incidental, special, or punitive damages (including without limitation lost profits) in connection with your use of the SOFTWARE or SERVICES, even if HONDA or PROVIDERS are aware of the possibility of such damages. These limitations apply to all claims, including, without limitation, claims in contract and tort (such as negligence, product liability and strict liability). To the extent that a jurisdiction does not permit the exclusion or limitation of liability as set forth herein our liability is limited to the maximum extent permitted by law in such states. If HONDA or PROVIDERS are found liable to you for any reason, you agree that the aggregate liability of all these parties to you for any claim is limited to ten U.S. dollars (US \$10.00). Neither HONDA nor any PROVIDER would have agreed to provide the SOFTWARE or SERVICES to you if you did not agree to this limitation. This amount is the sole and exclusive liability of HONDA and PROVIDERS to you, and is payable as liquidated damages and not as a penalty. Except where prohibited by law, you may not bring any claim against HONDA or any third-party beneficiary more than two (2) years after the claim arises. We do not have any liability for SOFTWARE or SERVICES interruptions of any length.

Features

(a) <u>Release of HONDA and PROVIDERS</u> For yourself and anyone else claiming under you, you agree to release and discharge HONDA, PROVIDERS, their respective officers, directors, and employees, and each third-party beneficiary from all claims, liabilities and losses in connection with the SOFTWARE or SERVICES, including, but not limited to claims for personal injury or property damage arising from the total or partial failure of performance of the SOFTWARE or SERVICES, even if caused by or based upon the negligence, gross negligence, strict products liability, Deceptive Trade Practices Act violations, bad faith, or breach of warranty of us or the malfunction of the SOFTWARE or SOFTWARE SERVICES. YOU AGREE TO WAIVE TO THE FULLEST EXTENT ALLOWED BY LAW, ANY CLAIM FOR DAMAGES OTHER THAN DIRECT, COMPENSATORY DAMAGES AS LIMITED IN THIS AGREEMENT. YOU HEREBY RELEASE AND DISCHARGE HONDA AND ITS LICENSORS AND CONTRACTORS (INCLUDING ANY THIRD PARTIES PROVIDING ALL OR PART OF THE SOFTWARE OR SERVICES) FROM AND AGAINST ANY CLAIMS, DAMAGES, EXPENSES AND LIABILITY ARISING FROM OR RELATED TO ANY INJURIES, DAMAGES, OR LOSSES TO ANY PERSON (INCLUDING DEATH) OR PROPERTY OF ANY KIND RESULTING IN WHOLE OR PART, DIRECTLY OR INDIRECTLY, FROM YOUR USE OF THE SOFTWARE OR SERVICES.

H. Survival. You agree that the limitations of liability and indemnities in this AGREEMENT will survive even after the AGREEMENT has ended. These limitations of liability apply not only to you, but to anyone using the SOFTWARE or SERVICES via your VEHICLE, to anyone making a claim on your behalf, and to any claims made by your family, employees, customers, or others arising out of or relating to your VEHICLE, the SOFTWARE, or SERVICES.

I. Availability/Interruption. The SOFTWARE and certain SERVICES are made available through your VEHICLE's compatible multimedia system when the VEHICLE is turned on. Certain SERVICES may be available only through your compatible mobile device when it is within the operating range of the VEHICLE and a wireless carrier. The availability of the SOFTWARE and SERVICES may be subject to transmission limitation or interruption, including but not limited to technical obsolesce or sunsetting of the hardware, software or firmware, inside of or external to the Vehicle, required for data transmission or receipt. HONDA does not guarantee that the SOFTWARE, SERVICES, or any portion thereof will be available at all times or in all areas. You acknowledge and agree that HONDA is not responsible for performance degradation, interruption or delays. You acknowledge that HONDA shall not be liable to you if the SOFTWARE or SERVICES in a given location are not available. If the SOFTWARE or SERVICES are not available within your intended location, you agree that your sole remedy shall be to cease using the SOFTWARE and SERVICES.

J. PRODUCT SUPPORT: Product support for the SOFTWARE is provided by HONDA. For product support, please refer to HONDA instructions provided in the DOCUMENTATION. Should you have any questions concerning this AGREEMENT, or if you desire to contact HONDA for any other reason, please refer to the HONDA contact information provided in the DOCUMENTATION.

K. Termination and Transfer.

1. Termination. This AGREEMENT is effective until terminated by you or US. WE may terminate this AGREEMENT for any or no reason, and with or without notice to you. Your rights under this AGREEMENT will terminate automatically without notice from US if you fail to comply with any term of this AGREEMENT. Upon termination of this AGREEMENT, you shall cease all use of the SOFTWARE and SERVICES.

2. Transfer: You may permanently transfer your rights under this AGREEMENT only as part of a sale or transfer of the VEHICLE, provided you retain no copies, you transfer all of the SOFTWARE and HONDA SERVICES (including all component parts, the media and printed materials, and any upgrades), and the recipient agrees to the terms of this AGREEMENT. You agree to notify HONDA upon the sale or transfer of the VEHICLE. To contact HONDA, please refer to the HONDA contact information provided in the DOCUMENTATION.

L. Changes to the SOFTWARE or SERVICES. WE may change, modify, or update the SOFTWARE or SERVICES from time to time. Unless explicitly stated otherwise, any new features or services that augment or enhance the SOFTWARE or SERVICES in the future shall respectively be considered part of the SOFTWARE or SERVICES and subject to this AGREEMENT. WE reserve the right at any time and from time to time to interrupt, restrict, modify, suspend, discontinue, temporarily or permanently, the SOFTWARE or SERVICES (or any portion thereof), with or without notice to you, and you agree that HONDA shall not be liable to you or to any third party for any modification, suspension or discontinuance of the SOFTWARE or SERVICES.

M. ARBITRATION:

PLEASE READ THIS ARBITRATION PROVISION CAREFULLY TO UNDERSTAND YOUR RIGHTS. YOU AGREE THAT ANY CLAIM THAT YOU MAY HAVE IN THE FUTURE MUST BE RESOLVED THROUGH BINDING ARBITRATION. YOU WAIVE THE RIGHT TO HAVE YOUR DISPUTE HEARD IN COURT AND WAIVE THE RIGHT TO BRING CLASS CLAIMS. YOU UNDERSTAND THAT DISCOVERY AND APPEAL RIGHTS ARE MORE LIMITED IN ARBITRATION.

Arbitration is a method of resolving a claim, dispute or controversy without filing a lawsuit. By agreeing to arbitrate, the right to go to court is waived and instead claims, disputes or controversies are submitted to binding arbitration. This provision sets forth the terms and conditions of our agreement. YOU and HONDA agree and acknowledge that this Agreement affects interstate commerce and the Federal Arbitration Act ("FAA") applies. By using the Software, Vehicle, or Services, YOU elect to have disputes resolved by arbitration. YOU, HONDA or any involved third party may pursue a Claim. "Claim" means any dispute between YOU, HONDA, or any involved third party relating to your use of the Software, the Vehicle, or the Services, this Agreement, or our relationship, including any representations, omissions or warranties. "Claim" does not include personal injury or wrongful death claims. YOU or HONDA may seek remedies in small claims court or provisional judicial remedies without arbitrating. In addition, notwithstanding anything herein to the contrary, YOU or HONDA may seek equitable relief in a court of competent jurisdiction.

YOU or HONDA may select arbitration with American Arbitration Association, JAMS or National Arbitration and Mediation. Contact these sponsors for their rules. The hearing will be in the federal district where YOU reside. If agreed, it may be by telephone or written submissions. Filing and arbitrator fees to be paid per the sponsor rules. You may contact the sponsor for a fee waiver. If no fee waivers, HONDA will pay filing and arbitrator fees up to \$5,000, unless law requires more. Each party is responsible for other fees. Arbitrator may award costs or fees to prevailing party, if permitted by law. HONDA will not seek fees, unless the claims are frivolous.

Arbitrator shall be an attorney or current or retired judge familiar with automotive or consumer software. The arbitrator shall follow substantive law, statute of limitations and decide all issues relating to the interpretation, construction, enforceability and applicability of this provision. The arbitrator may order relief permitted by law. This provision is governed and enforceable by the FAA. An award shall include a written opinion and be final, subject to appeal by the FAA.

This provision survives termination of this Agreement or relationship, bankruptcy, assignment or transfer. If part of this provision is unenforceable, the remainder remains in effect. If unenforceability allows arbitration as a class action, then this provision is entirely unenforceable. You may opt out within 30 days of your initial use of the Software by sending a signed, written notice to HONDA at American Honda Motor Co., Inc. Honda Automobile Customer Service Mail Stop CHI-5, 1919 Torrance Blvd. Torrance, CA 90501-2746. HONDA reserves the right to make changes to this provision after providing written notice and an opportunity to opt out.

N. Miscellaneous: You may not assign this AGREEMENT without HONDA's prior written consent. This AGREEMENT and any additional HONDA TERMS and PROVIDER TERMS represents the entire agreement between you and US. HONDA may amend the terms of this AGREEMENT by providing you with notices of such updated terms. If you do not consent to be bound by the updated terms, your sole remedy will be to cease using the SOFTWARE and SERVICES. If any part of this AGREEMENT is found invalid, void, or unenforceable, the balance of the AGREEMENT will remain valid and enforceable according to its terms. To the fullest extent permitted by law, and except as explicitly provided otherwise, this AGREEMENT and any disputes arising out of or relating to it will be governed by the laws of the State of California, except that California laws concerning choice of law or conflicts shall not apply if they would cause the substantive law of another jurisdiction to apply. Notwithstanding the foregoing, Section M shall be governed by the Federal Arbitration Act and the laws of the State of California, as applicable, as set forth therein. The failure to enforce any term of this AGREEMENT on one occasion shall not prevent enforcement on any other occasion or the enforcement of any other term. Headings and captions shall not be considered included for purposes of interpretation or application hereof, but are for convenience only.

Legal Information on Apple CarPlay/Android Auto

OWNER'S MANUAL LICENSE/LIABILITY STATEMENTS

USE OF APPLE CARPLAY IS SUBJECT TO YOUR AGREEMENT TO THE CARPLAY TERMS OF USE, WHICH ARE INCLUDED AS PART OF THE APPLE IOS TERMS OF USE. IN SUMMARY, THE CARPLAY TERMS OF USE DISCLAIM APPLE AND ITS SERVICE PROVIDERS' LIABILITY IF THE SERVICES FAIL TO PERFORM CORRECTLY OR ARE DISCONTINUED, STRICTLY LIMIT APPLE AND ITS SERVICE PROVIDERS' OTHER LIABILITIES, DESCRIBE THE KINDS OF USER INFORMATION (INCLUDING, FOR EXAMPLE, VEHICLE LOCATION, VEHICLE SPEED, AND VEHICLE STATUS) BEING GATHERED AND STORED BY APPLE AND ITS SERVICE PROVIDERS, AND DISCLOSE CERTAIN POSSIBLE RISKS ASSOCIATED WITH THE USE OF CARPLAY, INCLUDING THE POTENTIAL FOR DRIVER DISTRACTION. SEE APPLE'S PRIVACY POLICY FOR DETAILS REGARDING APPLE'S USE AND HANDLING OF DATA UPLOADED BY CARPLAY.

USE OF ANDROID AUTO IS SUBJECT TO YOUR AGREEMENT TO THE ANDROID AUTO TERMS OF USE WHICH MUST BE AGREED TO WHEN THE ANDROID AUTO APPLICATION IS DOWNLOADED TO YOUR ANDROID PHONE. IN SUMMARY, THE ANDROID AUTO TERMS OF USE DISCLAIM GOOGLE AND ITS SERVICE PROVIDERS' LIABILITY IF THE SERVICES FAIL TO PERFORM CORRECTLY OR ARE DISCONTINUED, STRICTLY LIMIT GOOGLE AND ITS SERVICE PROVIDERS' OTHER LIABILITIES, DESCRIBE THE KINDS OF USER INFORMATION (INCLUDING, FOR EXAMPLE, VEHICLE LOCATION, VEHICLE SPEED, AND VEHICLE STATUS) BEING GATHERED AND STORED BY GOOGLE AND ITS SERVICE PROVIDERS, AND DISCLOSE CERTAIN POSSIBLE RISKS ASSOCIATED WITH THE USE OF ANDROID AUTO, INCLUDING THE POTENTIAL FOR DRIVER DISTRACTION. SEE GOOGLE'S PRIVACY POLICY FOR DETAILS REGARDING GOOGLE'S USE AND HANDLING OF DATA UPLOADED BY ANDROID AUTO.

DISCLAIMER OF WARRANTIES; LIMITATION ON LIABILITY

YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF APPLE CARPLAY OR ANDROID AUTO ("THE APPLICATIONS") IS AT YOUR SOLE RISK AND THAT THE ENTIRE RISK AS TO SATISFACTORY QUALITY, PERFORMANCE, ACCURACY AND EFFORT IS WITH YOU TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW. AND THAT THE APPLICATIONS AND INFORMATION ON THE APPLICATIONS IS PROVIDED "AS IS" AND "AS AVAILABLE," WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, AND HONDA HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH RESPECT TO THE APPLICATIONS AND INFORMATION ON THE APPLICATIONS, EITHER EXPRESS. IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND/OR CONDITIONS OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, QUIET ENJOYMENT, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY HONDA OR AN AUTHORIZED. REPRESENTATIVE SHALL CREATE A WARRANTY. AS EXAMPLES, AND WITHOUT LIMITATION. HONDA DISCLAIMS ANY WARRANTY REGARDING THE ACCURACY OF DATA PROVIDED BY THE APPLICATIONS, SUCH AS THE ACCURACY OF DIRECTIONS, ESTIMATED TRAVEL TIME, SPEED LIMITS, ROAD CONDITIONS, NEWS, WEATHER, TRAFFIC, OR OTHER CONTENT PROVIDED BY APPLE, GOOGLE, THEIR AFFILIATES, OR THIRD PARTY PROVIDERS: HONDA DOES NOT GUARANTEE AGAINST LOSS OF APPLICATION DATA. WHICH MAY BE LOST AT ANY TIME; HONDA DOES NOT GUARANTEE THAT THE APPLICATIONS OR ANY SERVICES PROVIDED THROUGH THEM WILL BE PROVIDED AT ALL TIMES OR THAT ANY OR ALL SERVICES WILL BE AVAILABLE AT ANY PARTICULAR TIME OR LOCATION. FOR EXAMPLE. SERVICES MAY BE SUSPENDED OR INTERRUPTED WITHOUT NOTICE FOR REPAIR. MAINTENANCE, SECURITY FIXES, UPDATES, ETC., SERVICES MAY BE UNAVAILABLE IN YOUR AREA OR LOCATION, ETC. IN ADDITION, YOU UNDERSTAND THAT CHANGES IN THIRD PARTY TECHNOLOGY OR GOVERNMENT REGULATION MAY RENDER THE SERVICES AND/OR APPLICATIONS OBSOLETE AND/OR UNUSABLE.

TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT SHALL HONDA OR ITS AFFILIATES BE LIABLE FOR PERSONAL INJURY, OR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, CORRUPTION OR LOSS OF DATA, FAILURE TO TRANSMIT OR RECEIVE ANY DATA, BUSINESS INTERRUPTION OR ANY OTHER COMMERCIAL DAMAGES OR LOSSES, ARISING OUT OF OR RELATED TO THE APPLICATIONS OR YOUR USE OF OR INABILITY TO USE THE APPLICATIONS OR INFORMATION ON THE APPLICATIONS, HOWEVER CAUSED, REGARDLESS OF THE THEORY OF LIABILITY (CONTRACT, TORT OR OTHERWISE) AND EVEN IF HONDA WERE ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. SOME STATES AND JURISDICTIONS DISALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR DAMAGES, SO THESE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. IN NO EVENT SHALL HONDA'S TOTAL LIABILITY TO YOU FOR ALL DAMAGES (OTHER THAN AS MAY BE REQUIRED BY APPLICABLE LAW IN CASES INVOLVING PERSONAL INJURY) EXCEED THE AMOUNT OF FIVE DOLLARS (\$5.00). THE FOREGOING LIMITATIONS WILL APPLY EVEN IF THE ABOVE STATED REMEDY FAILS OF ITS ESSENTIAL PURPOSE.

About Open Source Licenses

To see the open source license information, follow these steps.

- **1.** Press the totton.
- 2. Select General Settings.
- 3. Select System.
- 4. Select About.
- 5. Select Legal Information.
- 6. Select License.

License Information

DTS

FOR DTS PATENTS, SEE *http://xperi.com/dts-patents/*. MANUFACTURED UNDER LICENSE FROM DTS, INC. AND ITS AFFILIATES. DTS, THE SYMBOL, DTS AND THE SYMBOL TOGETHER, DTS:X, DTS-HD, DTS-HD MASTER AUDIO, NEURAL:X, AND VIRTUAL:X ARE REGISTERED TRADEMARKS OR TRADEMARKS OF DTS, INC. IN THE UNITED STATES AND/OR OTHER COUNTRIES. ©2023 DTS, INC. AND ITS AFFILIATES. ALL RIGHTS RESERVED.



Bluetooth

The *Bluetooth*[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic Automotive Systems Co., Ltd. is under license. Other trademarks and trade names are those of their respective owners.

The *Bluetooth*[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by ALPS ALPINE CO., LTD. is under license. Other trademarks and trade names are those of their respective owners.

https://www.bluetooth.com/develop-with-bluetooth/marketing-branding/

Bluetooth[®]

Windows Media

This product is protected by certain intellectual property rights of Microsoft. Use or distribution of such technology outside of this product is prohibited without a license from Microsoft.

Apple

"Made for iPod," and "Made for iPhone," mean that an electronic accessory has been designed to connect specifically to iPod, or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, or iPhone, may affect wireless performance.

Apple, the Apple Logo, iPhone, iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Apple CarPlay, iPod, iPhone, iTunes, Siri and Lightning are trademarks of Apple Inc. App Store is a service mark of Apple Inc.



MPEG

Mpeg4 Visual

THIS PRODUCT IS LICENSED UNDER THE MPEG-4 VISUAL PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER FOR (i) ENCODING VIDEO IN COMPLIANCE WITH THE MPEG-4 VISUALA STANDARD ("MPEG-4 VIDEO") AND/OR (ii) DECODING MPEG-4 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NONCOMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED BY MPEG LA TO PROVIDE MPEG-4 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION INCLUDING THAT RELATING TO PROMOTIONAL, INTERNAL AND COMMERCIAL USES AND LICENSING MAY BE OBTAINED FROM MPEG LA, LLC. SEE *HTTP://WWW.MPEGLA.COM*.

VC-1

Features

THIS PRODUCT IS LICENSED UNDER THE VC-1 PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE VC-1 STANDARD ("VC-1 VIDEO") AND/OR (ii) DECODE VC-1 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE VC-1 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE

HTTP://WWW.MPEGLA.COM.


AVC/H.264

THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NONCOMMERCIAL USE OF A CONSUMER TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE

HTTP://WWW.MPEGLA.COM.

You can use the rear entertainment system on the overhead screen by selecting the **Rear Entertainment** icon on the home screen.

Auxiliary Console Panel



The headphone connector for the rear entertainment system is on the left side of the third row outer seats. The connector has its own volume control.

HDMI[™] Port



There is an HDMI[™] port in the console compartment. The rear entertainment system will accept HDMI[™] cable connections with video equipment that is equipped with an HDMI[™] port.

Rear Entertainment System*

Depending on the connected device, operation stops if the audio source is changed.

≫HDMI™ Port


The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

The HDMI[™] port is for use with the rear entertainment system only.

Not all HDMI devices are compatible with the rear entertainment system. For a list of compatible HDMI devices:

U.S.: Visit *https://mygarage.honda.com/s/article/RES-connections*, or call 1-888-528-7876. Canada: For more information on HDMI device compatibility, call 1-888-946-6239.

Overhead Screen



Push the **OPEN** button, then pull down the screen to the first or second detent until it latches.

Brightness control

You can use the brightness control button to adjust the overhead screen brightness.

Rear Entertainment System Start-Up


Each time the rear entertainment system starts up, a welcome screen is displayed on the audio/information screen.

Confirm the content on the screen, then select **Exit Tutorial** to use the rear entertainment system.

Select **Do not show tutorial again** to prevent this from displaying again in the future.

Operating the System

You can operate the rear entertainment system and change its settings on the audio/information screen.

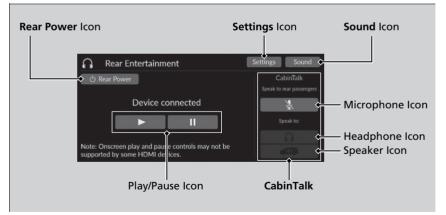

➢Rear Entertainment System Start-Up

Tutorial video:

Scan the QR-code displayed on the screen to watch a video explaining how to use the rear entertainment system.

You can also check this QR-code under **Settings**. Settings P. 351

Rear Power

Select Rear Power to turn the overhead screen on and off.

Check **Do not show this again** to turn the screen on and off without displaying the pop-up again the future.

Closing the overhead screen powers off the screen, but content may continue to play depending on the connected device.

Settings

Select **Settings** to confirm or adjust rear entertainment system settings. Content is as follows.

- Headphones: You can customize headphone settings.
 How to Connect Headphones P. 353
- **Rear Entertainment Help**: Confirm how to use this feature. You can scan the QR-code to watch a tutorial video.

Sound

You can adjust sound setting. Adjusting the Sound P. 271

CabinTalk

Select the microphone icon to broadcast the front passenger's voice to the second and third row seat's passengers using the rear speakers and/or headphones.

- Headphone icon: Broadcast to headphones.
- Speaker icon: Broadcast to the speakers.

Play/Pause

You can play/pause media content after opening them. Depending on the connected device, the play/pause control may not be supported.

≥CabinTalk

You can also use **CabinTalk** by selecting its icon on the home screen.

CabinTalk® P. 389

When you use **CabinTalk**, audio from the rear entertainment system is muted. Depending on the connected device, the video content may still be playing.

When you start up the rear entertainment system application: the speaker icon, and headphone icons are grayed out and cannot be used. Selecting the microphone icon will deactivate the grayed-out state and make it functional.

How to Connect Headphones

You can enjoy media using headphones with a wired or *Bluetooth*[®] connection.

Wired Connection

You can use this by connecting your device to the auxiliary console panel if applicable.

Auxiliary Console Panel P. 348

Wireless Connection

- When connecting a new device
- 1. Select Settings.
- 2. Select Headphones.
- 3. Select Add.
- 4. Select the *Bluetooth®* headphone you want to connect.

When connecting/deleting a saved device

- 1. Select Settings.
- 2. Select Headphones.
- 3. Select Connect for the *Bluetooth*[®] headphone you want to connect.
 ▶ To delete, select the corresponding (∞) icon under Headphones → Manage.

When disconnecting a device

- 1. Select Settings.
- 2. Select Headphones.
- 3. Select Disconnect for the *Bluetooth®* headphone you want to disconnect.


Wireless Connection

Up to 4 headphones can be connected simultaneously and saved in the system. Saved headphones can be connected or disconnected.

You can turn **Rear Entertainment Bluetooth** on and off via **Settings** \rightarrow **Headphones** \rightarrow **Manage** \rightarrow **Rear Entertainment Bluetooth**. Use the audio/information screen to customize certain features.

How to Customize the General Settings

With the power mode in ON, press the 📠 button, and then select **General Settings** and select a setting item.

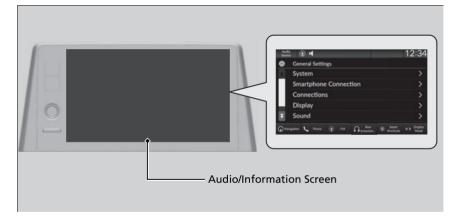

➢Customized Features

When you customize settings:

- Make sure that the vehicle is at a complete stop.
- Put the transmission into **P**.

To customize features, refer to the following.

System P. 355
Smartphone Connection P. 358
Connections P. 359
Display P. 360
Sound P. 360
Camera P. 361
Voice Control P. 361

System

Customizable Features		tures	Description	Selectable Settings
Date & Time	Set Date & Time	Automatic Date & Time	Select ON to have the GPS automatically adjust the clock. Select OFF to cancel this function.	ON*1/OFF
		Set Date	Adjusts date. Adjusting the Clock P. 124	Day/Month/Year
		Set Time	Adjusts time. Adjusting the Clock P. 124	Hour/Minute AM/PM
	Time Zone	Automatic Time Zone*	Sets the audio system to automatically adjust the clock when driving through different time zones.	ON*1/OFF
		(Select time zone)	Changes the time zone manually.	—
	Auto Day Time	ylight Saving	Sets the clock to update based on daylight savings time.	ON*1/OFF
	Date Format		Select a date format.	MM/DD/YYYY*2/ DD/MM/YYYY*3/ YYYY/MM/DD
	Time Format		Select a time format.	12H*1/24H

*1:Default Setting *2:Default Setting for U.S. models *3:Default Setting for Canadian models

Customizable Features		Description	Selectable Settings
Language		Changes the driver information interface and audio/ information screen language separately.	English*1/Español/ Français
Touch Panel Sensitivity		Sets the sensitivity of the touch panel screen.	High/Normal*1
System Volumes	System Sounds	Sets the system sound volume level.	_
	Text-to-Speech	Sets the text-to-speech volume level.	_
	Navigation Guidance	Sets the navigation guidance volume level.	_
	Phone Calls	Sets the phone call volume level.	_
	Default	Resets all System Volumes settings to default values.	
Data Sharing Setting		Turns the data sharing setting on and off. Start Up P. 252	ON*1/OFF
Refuel Recommend*		Turns the refuel recommend function on and off. ▶ Refuel Recommend P. 387	ON*1/OFF

*1:Default Setting

Customizable Features		Description	Selectable Settings
About	Status		
	Legal Information		
	Model Number	Displays the Android setting items	
	Android Version	 Displays the Android setting items. 	
	Kernel Version		
	Build Number	İ	
Factory Data Reset		Resets all the settings to their factory default. Defaulting All the Settings P. 369	Continue/Cancel
Detail Information	App Manager	Displays the Android system memory and apps information.	—

Smartphone Connection

Customizable Features		Description	Selectable Settings
Apple CarPlay	+ Connect New Device	Pairs a new phone to Apple CarPlay. Phone Setup P. 375	—
	(Saved Devices)	Connects, disconnects, or deletes a paired phone. Phone Setup P. 375	—
Android Auto	+ Connect New Device	Pairs a new phone to Android Auto. Phone Setup P. 375	_
	(Saved Devices)	Connects, disconnects, or deletes a paired phone. Phone Setup P. 375	_

■ Connections

Customizable Features		e Features	Description	Selectable Settings
	Change Mode		Changes the Wi-Fi mode.	Network ^{*1} /Smartphone Connection ^{*2} /OFF
	(Available Networks/Connected Devices)		Displays the available network(s) or current connected device(s).	—
	Options	Add Network	Adds a new network to connect Wi-Fi.	—
Wi-Fi		Saved Networks	Saves the connected network.	—
	Setup	Network SSID	Sets the network name.	—
		Security	Displays the network security.	—
		Password	Sets required password to connect Wi-Fi device to the network.	—
		Wi-Fi Band	Displays the Wi-Fi band.	_
	Options	Bluetooth	Turns <i>Bluetooth</i> [®] on and off.	ON ^{*1} /OFF
Bluetooth		Priority Device	Displays the priority device.	_
	+ Connect New Device		Pairs a new phone to HFL. Phone Setup P. 375	_
	(Saved Devices)		Connects, disconnects, or deletes a paired phone. Phone Setup P. 375	_

*1:Default Setting *2:Appears only when Apple CarPlay or Android Auto is connected wirelessly.

Display

Customizable Features	Description	Selectable Settings
Brightness	Changes the brightness of the audio/information screen.	—
Contrast	Changes the contrast of the audio/information screen.	_
Black Level	Changes the black level of the audio/information screen.	—
Default	Resets all customized settings for the brightness, contrast, and black level.	_

Sound


Customizab	le Features	Description	Selectable Settings
	Treble		
Bass / Treble	Midrange	_	
	Bass	_	
Center Speaker Volum	ie*	 Adjusts the settings of the audio speakers' sound. 	
Audio Zones & Balanc	e / Fader*	Adjusting the Sound P. 271	_
Balance / Fader*			
DTS Neural Surround*		_	
Speed Volume Compe	ensation	_	

Camera

Customizab	le Features	Description	Selectable Settings
Poor Comoro	Fixed Guideline	Shows the guideline that does not move with the steering wheel. Multi-View Rear Camera P. 508	ON*1/OFF
Rear Camera	Dynamic Guideline	Shows the guideline that moves with the steering wheel. Multi-View Rear Camera P. 508	ON*1/OFF
Cross Traffic Monitor		Shows arrows on the rear camera image to indicate vehicles approaching from the sides. Cross Traffic Monitor P. 505	ON*1/OFF
1:Default Setting			
Voice Control			
Customizable	e Features	Description	Selectable Settings
Voice Control Mode		Selects a mode of the voice portal screen. Voice Control Operation P. 274	Assist/Normal*1

How to Customize the Vehicle Settings

With the power mode in ON, press the the button, and then select **Vehicle Settings** and select a setting item.

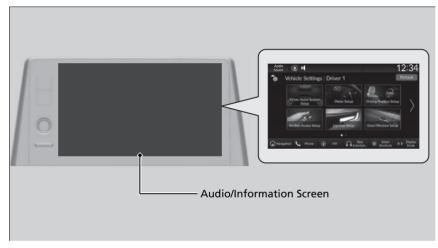

Driver	Assist	System	Setup
--------	--------	--------	-------

Customizable Features	Description	Selectable Settings
Forward Collision Warning Distance	Changes the distance at which Collision Mitigation Braking System [™] (CMBS [™]) alerts.	Long/Normal*1/Short
ACC Forward Vehicle Detect Beep	Turns audible notification on/off when vehicle has moved in/out of adaptive cruise control range.	ON/OFF*1
Road Departure Mitigation Setting	Selects operating mode of the Road Departure Mitigation system. Road Departure Mitigation System P. 451	Narrow/Normal*1/Wide/ Warning Only
Lane Keeping Assist Suspend Beep	Switches the LKAS suspend alert beeps on and off. Lane Keeping Assist System (LKAS) P. 472	ON/OFF*1
Blind Spot Info	Selects On/Off the blind spot information system audible alert. Blind Spot Information System P. 434	Audible And Visual Alert ^{*1/} Visual Alert
Traffic Sign Recognition System	Displays the traffic sign recognition system on instrument panel. Traffic Sign Recognition System P. 482	ON ^{*1} /OFF

Meter Setup

Customizable Features	Description	Selectable Settings
Adjust Outside Temp. Display	Adjusts outside temperature reading by a few degrees. Dutside Temperature P. 111	-5°F ~ ±0°F ^{*1} ~ +5°F (U.S.) -3°C ~ ±0°C ^{*1} ~ +3°C (Canada)
"Trip A" Reset Timing	Selects the timing to reset Trip A. Range/Fuel/Trip Meter P. 115 Speed/Time/Trip Meter P. 117	When Fully Refueled/IGN OFF/ Manually Reset ^{*1}
"Trip B" Reset Timing	Selects the timing to reset Trip B. Range/Fuel/Trip Meter P. 115 Speed/Time/Trip Meter P. 117	When Fully Refueled/IGN OFF/ Manually Reset ^{*1}
Adjust Alarm Volume	Changes volume level of all system warnings, door opening warning, and indicators.	High/Mid ^{*1} /Low
Reverse Alert Tone	Turns the reverse alert tone on and off.	ON*1/OFF
Fuel Efficiency Backlight	Turns the ambient meter feature on and off.	ON*1/OFF
Turn By Turn Auto Display	Turns on/off the pop-up warning in the turn-by-turn navigation in the driver information interface. Turn-by-Turn Directions P. 119	ON*1/OFF
Speed/Distance Units	Selects the trip computer units. Speed/Distance Units P. 121	km/h · km/mph · miles ^{*1} (U.S.) km/h · km ^{*1} / mph · miles (Canada)
Tachometer	Selects whether the tachometer come on the driver information interface.	ON*1/OFF
Rear Seat Reminder	Turns the Rear Seat Reminder feature on and off.	ON ^{*1} /OFF

Driving Position Setup

Customizable Features	Description	Selectable Settings
Memory Position Link	Turns the driving position memory system on and off.	ON*1/OFF
Seat Position Movement At Entry/Exit	Moves the seat rearward when you get in/get out of the vehicle. Changes the setting for this feature.	ON*1/OFF

*1:Default Setting

Keyless Access Setup

Customizable Features	Description	Selectable Settings
Door Unlock Mode	Changes which doors unlock when you grab the driver's door handle.	Driver Door Only ^{*1/} All Doors
Keyless Access Light Flash	Causes some exterior lights to flash when you unlock/lock the doors.	ON*1/OFF
Keyless Access Beep	Causes the beeper to sound when you unlock/lock the doors.	ON*1/OFF
Remote Start System ON/ OFF	Turns the remote engine start feature on and off.	ON*1/OFF
Lockout Protection	Changes the settings for the lockout protection function.	ON*1/OFF

Lighting Setup

Customizable Features	Description	Selectable Settings
Interior Light Dimming Time	Selects the length of time the interior lights stay on after doors are closed.	60sec/30sec*1/15sec
Headlight Auto OFF Timer	Selects the length of time the exterior lights stay on after you close the driver's door. Automatic Lighting Off Feature P. 176	60sec/30sec/15sec*1/0sec
Auto Light Sensitivity*	Changes the timing for the headlights to come on.	Min/Low/Mid ^{*1} /High/Max
Auto Headlight On with Wiper On	Selects On/Off headlight function and wiper operation when the headlight is in AUTO setting. Headlight Integration with Wipers P. 176	ON*1/OFF

■ Door/Window Setup

Customizable Features	Description	Selectable Settings
Auto Door Lock	Changes the setting for the automatic locking feature.	OFF/With Vehicle Speed ^{*1} / Shift From P
Auto Door Unlock	Changes the setting for when the doors unlock automatically.	OFF/All Doors When Driver's Door Opens ^{*1/} All Doors When Shifted to Park/All Doors With IGN OFF
Walk Away Auto Lock	Changes the settings for the auto lock function when you walk away from the vehicle.	ON/OFF*1
Power Slide Door Keyless Open Mode	Changes the keyless setting for when the power sliding door opens.	Anytime ^{*1} /When Unlocked
Lock Presetting	Changes the settings for the Lock Presetting function.	ON*1/OFF
Keyless Lock Answer Back	Turns on/off flash of exterior lights when doors are locked/unlocked by the keyless remote. Using the Remote Transmitter P. 132	ON*1/OFF
Security Relock Timer	Changes the time it takes for the doors to relock and the security system to set after you unlock the vehicle without opening any door.	30sec*1/60sec/90sec
Remote Window Control	Turns the remote window control on and off.	ON*1/OFF

Power Tailgate Setup*

Customizable Features	Description	Selectable Settings
Keyless Open Mode	Changes the keyless setting for when the power tailgate opens.	Anytime*1/When Unlocked
Power Open By Outer Handle	Changes the setting to open power tailgate by tailgate outer handle.	ON (Power/Manual) ^{*1/} OFF (Manual Only)
Hands Free Access Function*	Changes the setting to open power tailgate by a swift forward in and out kicking motion under the rear bumper.	ON*1/OFF
*1:Default Setting		
Maintenance Info.		
Customizable Features	Description	Selectable Settings

Defaulting All the Settings

Reset all the menu and customized settings as the factory defaults.

Defaulting General Settings

Factory Da		settings such	n as brightness,
volume and	d routing prefe	erences to th	neir default
values. All	personal data	will be clear	ed.
		s <u></u>	<u></u>

- **1.** Press the 📠 button.
- 2. Select General Settings.
- 3. Select System.
- 4. Select Factory Data Reset.
 - A confirmation message appears on the screen.
- 5. Select Continue to reset the settings.
- 6. Select Continue again to reset the settings.The system will reboot.

Defaulting Vehicle Settings



- 1. Press the 👧 button.
- 2. Select Vehicle Settings.
- 3. Select Default.
- 4. Select Yes.

Defaulting All the Settings

When you transfer the vehicle to a third-party, reset all settings to default and delete all personal data.

If you perform **Factory Data Reset**, it will reset the preinstalled apps to their factory default.


If you perform **Factory Data Reset**, you cannot use the HondaLink[®] because it goes offline.

HondaLink® P. 301

Bluetooth[®] HandsFreeLink[®] (HFL) allows you to place and receive phone calls using your vehicle's audio system without handling your cell phone.

Using HFL

HFL Buttons

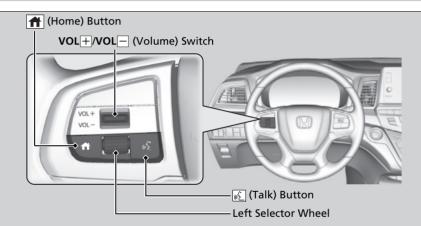

≫Bluetooth[®] HandsFreeLink[®]

Place your phone where you can get good reception.

To use HFL, you need a *Bluetooth*-compatible cell phone. For a list of compatible phones, pairing procedures, and special feature capabilities:

- U.S.: Visit https://mygarage.honda.com/s/hondahandsfreelink-compatibility-check, or call 1-888-528-7876.
- Canada: Call 1-855-490-7351.

To use the system, the **Bluetooth** setting must be **ON**. If there is an active connection to Apple CarPlay, HFL is unavailable.

Customized Features P. 354

Voice control tips

- Aim the vents away from the ceiling and close the windows, as noise coming from them may interfere with the microphone.
- Press the solution when you want to call a number using a phonebook name or a number.
 Speak clearly and naturally after a beep.
- If the microphone picks up voices other than yours, the command may be misinterpreted.
- To change the volume level, the volume level is able to change by the audio system's volume.

If there is no Favorite Contact entry in the system, the pop-up notification appears on the screen.

Favorite Contacts P. 381

(Talk) button: Press to access Voice Portal.

(Home) button: Press to go back to the home screen of the driver information interface.

Left Selector Wheel: Press the (Home) button. Roll up or down to select **Phone** on the driver information interface, and then press the left selector wheel. While receiving a call, the incoming call screen is displayed on the driver information interface. You can pick up the call using the left selector wheel.

Receiving a Call P. 385

To go to the phone screen:

1. Press the 📠 button.

2. Select Phone to switch the display to the phone screen.

≫Bluetooth[®] HandsFreeLink[®]


Bluetooth[®] Wireless Technology The *Bluetooth*[®] word mark and logos are registered trademarks owned by *Bluetooth* SIG, Inc., and any use of such marks by Honda Motor Co., Ltd., is under license. Other trademarks and trade names are those of their respective owners.

HFL Limitations

An incoming call on HFL will interrupt the audio system when it is playing. It will resume when the call is ended.

HFL Status Display

The audio/information screen notifies you when there is an incoming call.

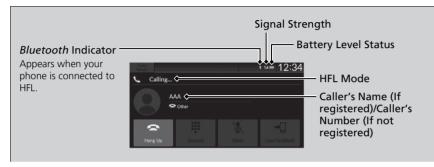

Limitations for Manual Operation

Certain manual functions are disabled or inoperable while the vehicle is in motion. You cannot select a grayed-out option until the vehicle is stopped.

Only previously stored phonebook names or numbers can be called using voice commands while the vehicle is in motion.

Favorite Contacts P. 381

➢HFL Status Display

The information that appears on the audio/ information screen varies between phone models.

HFL Menus

The power mode must be in ACCESSORY or ON to use the system.

Phone settings screen


> Settings		
Change Devices		>
Auto Sync Phone	ON	>
Auto Phone Call Transfer		>
Ringtone	Phone	>
HondaLink Assist	OFF	>

- **1.** Press the 📠 button.
- 2. Select Phone.
- 3. Select Settings.

≫HFL Menus

To use HFL, you must first pair your *Bluetooth*compatible cell phone to the system while the vehicle is parked.


Some functions are limited while driving.

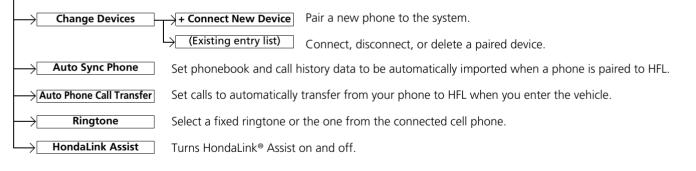

Phone menu screen



Press the me button.
 Select Phone.

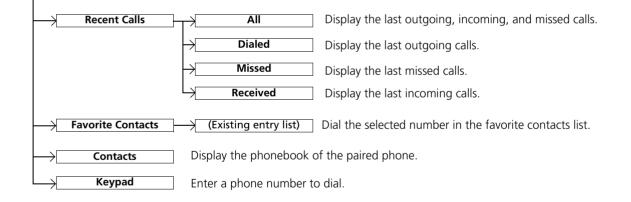

Phone Setup

■ Bluetooth® setup

You can turn *Bluetooth*[®] function on and off.

- **1.** Press the 📠 button.
- 2. Select General Settings.
- 3. Select Connections.
- 4. Select Bluetooth.
- 5. Select Options.
- 6. Select Bluetooth, then select ON.

≥Phone Setup


Your *Bluetooth*-compatible phone must be paired to the system before you can make and receive hands-free calls.

Phone Pairing Tips:

- You cannot pair your phone while the vehicle is moving.
- Up to six phones can be paired.
- Your phone's battery may drain faster when it is paired to the system.

Once you have paired a phone, you can see it displayed on the screen with one or more icons on the right side.

These icons indicate the following:




C: The phone can be used with HFL.

E: The phone is compatible with Apple CarPlay.

: The phone is compatible with Android Auto.

If there is an active connection to Apple CarPlay or Android Auto, pairing of additional *Bluetooth*compatible devices is unavailable.



- To pair a cell phone (when there is no phone paired to the system)
- 1. Select Phone.
- 2. Select Connect New Device.
- **3.** Make sure your phone is in search or discoverable mode.
- 4. Select Honda Odyssey from your phone.
 - If you want to pair a phone from this audio system, select Search for
 Devices, and then select your phone when it appears on the list.
- **5.** The system gives you a pairing code on the audio/information screen.
 - Confirm if the pairing code on the screen and your phone matches. This may vary by phone.
- 6. Select desired functions and then select Connect.
- **7.** A notification appears on the screen if pairing is successful.
- 8. Select OK.
 - A confirmation message for phone data collection appears.
- 9. Select ON or OFF.
 - A confirmation message for HondaLink Assist appears.
- 10. Select Yes or No.

>> Bluetooth				Opti
+ Connect New	Device			
Saved Device: 2 of 6	-			Priority
🗋 ΑΑΑ	고		>	✓
🔲 ВВВ		5		

To change the currently paired phone

- **1.** Go to the phone settings screen. **▶** Phone settings screen P. 373
- Phone settings screen P. :
- 2. Select Change Devices.
- **3.** Select a phone to connect.
 - HFL disconnects the connected phone and starts searching for another paired phone.
 - You can set the connected phone priority. Select the box checked on the phone you want to prioritize.
- 4. Select 🞵, 📐, 💽 or 🛦.
 - ▶ ☐ and (can be selected simultaneously; however, when (c) or (a) is selected, ∫ and (c) cannot be selected.
 - If you want to cancel the automatic Bluetooth[®] connection, uncheck all icons.
- 5. Select Apply.

If no other phones are found or paired when trying to switch to another phone, HFL will inform you that the original phone is connected again.

To pair other phones, select **+ Connect New Device** from the **Bluetooth** screen.



To delete a paired phone

- 2. Select Change Devices.
- 3. Select a phone you want to delete.
- 4. Select Options.

5. Select Delete Device.

6. A confirmation message appears on the screen. Select **Delete**.

Ringtone

You can change the ringtone setting.



- 2. Select Ringtone.
- 3. Select Vehicle or Phone.

≥Ringtone

Vehicle: The fixed ringtone sounds from the speakers.

Phone: Depending on the make and model of the cell phone, the ringtone stored in the phone will sound if the phone is connected.

Automatic Transferring

If you get into the vehicle while you are on the phone, the call can be automatically transferred to HFL.



- **1.** Go to the phone settings screen.
 - Phone settings screen P. 373
- 2. Select Auto Phone Call Transfer.
- 3. Select ON or OFF.

Automatic Import of Cellular Phonebook and Call History

🖕 AAA		 First Name 	Settings
Recent Calls	AAA		>
. Favorite	AAA G BBB M CCC		>
Contacts	м ссс		>
Contacts	р т		
Keypad 😨	; w		

When Automatic Phone Sync is set to On:

When your phone is paired, the contents of its phonebook and call history are automatically imported to the system.

Auto Sync Phone

Automatically import contacts and recent calls from this phone each time the vehicle is started. Some phones may have an additional setting to allow the phone to auto connect each time your turn on your vehicle.

■ Changing the Automatic Phone Sync setting

- **1.** Go to the phone settings screen.
 - Phone settings screen P. 373
- 2. Select Auto Sync Phone.
- 3. Select ON or OFF.

Mutomatic Import of Cellular Phonebook and Call History

When you select a name from the list in the cellular phonebook, you can see a category icon. The icons indicate what types of numbers are stored for that name.



On some phones, it may not be possible to import the category icons to the system.

The phonebook is updated after every connection. Call history is updated after every connection or call.

Favorite Contacts

Recent Calls Screen 🖕 AAA All 🕊 BBBBB Apr. 16 👈 CCCCC ⇒* C DDDDD Apr. 16 🤺 C EEEEE Apr. 16 🔺 V FEFF Apr. 16 🔺 Star Icon Contacts Screen Star Icon Keypad Screen 1234567890 Settings 1 3 X 4 5 8 9

Add to Favorite Contacts

To add a favorite contact

- 1. Select Phone.
- 2. Select Recent Calls, Contacts, or Keypad.
- On the Recent Calls or Contacts screen
- 3. Select the star icon.

On the Keypad screen

- 3. Select Add to Favorite Contacts.
 - A notification appears on the screen if the favorite contact is successfully stored.
 - ► To remove the favorite contact, select the star icon again.



To edit a favorite contact

- 1. Select Phone.
- 2. Select Favorite Contacts.
- **3.** Select **Edit** on the favorite contacts entry you want to edit.
- 4. Select a setting you want.
- 5. Select Done.

To delete a favorite contact

- 1. Select Phone.
- 2. Select Favorite Contacts.
- **3.** Select **Edit** on the favorite contacts entry you want to delete.
- 4. Select Remove.
- **5.** A confirmation message appears on the screen. Select **Yes**.

Making a Call

L.	123456	7890		Setting
Calls	1	2 ABC	3 DEF	×
+ Favorite Contacts	4 GHI	5 JKL	6 MNO	Add to Favorite Contacts
Contacts	7 PQRS	8 TUV	9 wxvz	
Keypad	*	0	#	Call

You can make calls by inputting any phone number, or by using the imported **Recent Calls, Favorite Contacts**, and **Contacts** entries.

Making a Call

Once a call is connected, you can hear the voice of the person you are calling through the audio speakers.

While there is an active connection with Apple CarPlay, phone calls cannot be made with HandsFreeLink[®] and are only made from Apple CarPlay.

🕳 AAA				irst Name	Settings
D Recent		^	AAA		>
Favorite Contacts		< D.O.J.M.P.T.S	BBB		>
		M	ссс		>
Contacts		P Ť			
Keypad	¥	W			

- To make a call using the imported phonebook
- 1. Select Phone.
- 2. Select Contacts.
- 3. Select a name.
 - You can sort by First Name or Last Name. Select the icon on the upper right of the screen
- 4. Select a number.
 - Dialing starts automatically.

2	Settings		7890	123456	5
3	×	3 DEF	2 ABC	1	Recent Calls
	Add to Favorite Contacts	6 MND	5 JKL	4 GHI	★ Favorite Contacts
	- 2	9 wxvz	8 TUV	7 PORS	Contacts
4	Call	#	0	*	🐺 Keypad

🖕 AAA			All	Settings
Recent Calls	8	🔮 BBBBB		Apr. 16 🤺
Favorite		🗸 ccccc		Apr. 16 🔺
Contacts		🕊 DDDDD		Apr. 16 🤺
Contacts		🔮 EEEEE		Apr. 16 🤺
Keypad	¥	V FFFFF		Apr. 16 🤺

Recent AAAAA Mobile	Edit
	Edit
avorite BBBBB Mobile	Edit
ontacts	

To make a call using a phone number

- 1. Select Phone
- 2. Select Keypad.
- 3. Select a number.
- Use the keyboard on the touch screen for entering numbers.
- 4. Select Call.
 - Dialing starts automatically.

■ To make a call using the Call History Call history is stored by All, Dialed, Missed, and Received.

- 1. Select Phone.
- 2. Select Recent Calls.
- You can sort by All, Dialed, Missed, or Received. Select the icon on the upper right of the screen.
- 3. Select a number.
 - ▶ Dialing starts automatically.

To make a call using a favorite contacts entry

- 1. Select Phone.
- 2. Select Favorite Contacts.
 - You can change the order of favorite contacts entries by selecting **Reorder**.
- 3. Select a number.
 - ▶ Dialing starts automatically.

➢To make a call using the Call History

- The call history displays the last 20 all, dialed, missed, or received calls.
- (Appears only when a phone is connected to the system.)

Receiving a Call



When there is an incoming call, an audible notification sounds (if activated) and the **Incoming Call...** screen appears.

You can answer the call using the left selector wheel.

To pick up the call, roll up or down to select (answer) on the driver information interface and then press the left selector wheel.

If you want to decline or end the call, select (ignore) on the driver information interface using the left selector wheel.

■Receiving a Call

Call Waiting

Select **(**answer) to put the current call on hold to answer the incoming call.

Select 🔀 using the left selector wheel to return to the current call.

Select 🙆 (ignore) to ignore the incoming call if you do not want to answer it.

Select 🔗 if you want to hang up the current call.

You can select the icons on the audio/information screen instead of the \frown and \bigcirc on the driver information interface.

Options During a Call

The following options are available during a call. **Mute**: Mute your voice. **Use Handheld**: Transfer a call from the system to your phone.

Keypad: Send numbers during a call. This is useful when you call a menu-driven phone system.

In Call			
A	AAAA		
877	Other 00:05		
-		1	
Hang Up	Keypad	Mute	Use Handheld

The available options are shown on the lower half of the screen.

Select the option.

The mute icon appears when Mute is selected when the other source screen other than the phone screen is displayed. Select Mute again to turn it off.

➢Options During a Call

Keypad: Available on some phones.

You can select the icons on the audio/information screen.

Models with navigation system

Your vehicle is equipped with a feature that automatically calculates when to refuel. This feature will notify you when refueling is recommended as well as enable you to search for gas stations that are located in the vicinity of your vehicle.



- **1.** When it is time to refuel the vehicle, a notification is displayed and a notification icon is displayed in the header.
- **2.** Touch the box that contains the icon.

3. Select Find Gas Station Now.

4. Choose a gas station from the search

► For instructions on how to use the

navigation system, refer to the

screen of the navigation system.

navigation system manual.

➢Refuel Recommend

You can turn the **Refuel Recommend** function on and off.

Customized Features P. 354

When you turn off this feature, the refuel recommend notification will not display.

This feature can only be used when the fuel level in the tank is below 30 percent.

If you select **Find Gas Station Now** or put more than 5 liters (1.3 gallons) of gasoline into the gas tank, the notification for refueling will disappear. If you prefer not to be notified, select **OFF** in the settings for **Refuel Recommend**.

When you drive on a rough road or ascend or descend a hill for an extended period of time, the notification may disappear or may not be displayed at all.

Your audio system allows you to monitor a view of the second and third row seat's passengers on the audio/information screen.

How to use



- 1. Select 🟦
- 2. Select CabinWatch.
 - ► To zoom the desired position, double tap or pinch out on the camera image.
 - ► To return to the normal display, double tap again or pinch in.
 - Select 👤 to mute your voice.
 - Select in to broadcast to headphones.
 - Select c broadcast to the rear speakers.


CabinWatch[®]*

You can customize the following items by selecting **Settings** on the **CabinWatch** screen.

- Show at System Start: Selects whether CabinWatch is displayed every time you start the engine.
- **Default View Mode**: You can change the screen setting every time you turn on **CabinWatch**.

The **CabinWatch** camera is equipped near the overhead screen.

The camera can also monitor at the nighttime with the IR lights.



For **CabinWatch** to work properly:

- Do not attach an object, sticker or film to the area around the camera.
- Do not touch the camera lens.
- In some low light conditions the IR lights may impact color of the camera image.

Your audio system allows you or the front passenger voices to be broadcast to the second and third row seat's passengers using the rear speakers and/or headphones.

How to use

Models with rear entert system	ainment
CabinTalk	s Headphones
Models without rear e system	ntertainment
CabinTalk	40 Speakers

- 1. Select 👬.
- 2. Select CabinTalk.
 - Select U to mute your voice.

Models with rear entertainment system

- Select c broadcast to the rear speakers.
- Select in to broadcast to headphones.

■CabinTalk[®]

Models with rear entertainment system

You can also use the **CabinTalk** on the **Rear** Entertainment screen.

Departing the System P. 350

When *weight* is selected, you can adjust the speaker volume by turning the volume knob.

This page intentionally left blank.

Driving

This chapter discusses driving and refueling.

Before Driving

-

1

Driving Preparation	392
Maximum Load Limit	395
Towing a Trailer	
Towing Preparation	
Driving Safely with a Trailer	402
Towing Behind a Motorhome	403
When Driving	
Starting the Engine	404
Precautions While Driving	410
Automatic Transmission	411
Shifting	412
Auto Idle Stop	422
ECON Mode	420

 Intelligent Traction Management
 421

 Vehicle Stability Assist™ (VSA®), aka Electronic

 Stability Control (ESC), System
 427

 Agile Handling Assist
 429

 Tire Pressure Monitoring System (TPMS)
 430

 Tire Pressure Monitoring System (TPMS)
 430

 Tire Pressure Monitoring System (TPMS)
 430

 Tire Pressure Monitoring System (TPMS)
 432

 Blind Spot Information System
 434

 Honda Sensing®
 437

 Collision Mitigation Braking System™ (CMBS™)
 440

 Road Departure Mitigation System
 456

 Lane Keeping Assist System (LKAS)
 472

 Traffic Sign Recognition System
 482

Front Sensor Camera	
Radar Sensor	489
Braking	
Brake System	490
Anti-lock Brake System (ABS)	497
Brake Assist System	498
Parking Your Vehicle	
Parking Your Vehicle When Stopped	499
Parking Sensor System *	500
Cross Traffic Monitor	505
Multi-View Rear Camera	508
Refueling	
Fuel Information	510
How to Refuel	. 511
Fuel Economy and CO ₂ Emissions	. 513
• • • <u>·</u>	

Driving Preparation

Check the following items before you start driving.

Exterior Checks

- Make sure there are no obstructions on the windows, door mirrors, exterior lights, or other parts of the vehicle.
 - Remove any frost, snow, or ice.
 - Remove any snow on the roof, as this can slip down and obstruct your field of vision while driving or fall off and impact other road users. If frozen solid, remove ice once it has softened.
 - When removing ice from around the wheels, be sure not to damage the wheel or wheel components.
- Make sure the hood is securely closed.
 - ▶ If the hood opens while driving, your front view will be blocked.
- Make sure the tires are in good condition.
 - Check air pressures, and check for damage and excessive wear.
 Checking and Maintaining Tires P. 551
- Make sure there are no people or objects behind or around the vehicle.
 There are blind spots from the inside.

Exterior Checks

NOTICE

When doors are frozen shut, use warm water around the door edges to melt any ice. Do not try to force them open, as this can damage the rubber trim around the doors. When done, wipe dry to avoid further freezing.

Do not pour warm water into the key cylinder. You will be unable to insert the key if the water freezes in the hole.

Heat from the engine and exhaust can ignite flammable materials left under the hood, causing a fire. If you've parked your vehicle for an extended period, inspect and remove any debris that may have collected, such as dried grass and leaves that have fallen or have been carried in for use as a nest by a small animal. Also, check under the hood for leftover flammable materials after you or someone else has performed maintenance on your vehicle.

Interior Checks

- Store or secure all items on board properly.
 - Carrying too much cargo, or improperly storing it, can affect your vehicle's handling, stability, stopping distance, and tires, and make it unsafe.
 - Maximum Load Limit P. 395
- Do not pile items higher than the seatback height.
 - They can block your view and may be thrown forward in the event of sudden braking.
- Do not place anything in the front seat footwells. Make sure to secure the floor mat.
 - An object or unsecured floor mat can interfere with your brake and accelerator pedal operation while driving.
- If you have any animals on board, do not let them move around in the vehicle.
 They may interfere with driving and a crash could occur.
- Securely close and lock all doors and the tailgate.

Locking/Unlocking the Doors from the Inside P. 137

- Adjust your seating position properly.
 - Adjust the head restraint, too.

Seats P. 193

- Adjusting the Front and Second Row Outer and Third Row Outer Head Restraints Positions P. 206
- Adjust the mirrors and steering wheel properly.
 - Adjust them while sitting in the proper driving position.

Mirrors P. 190

Adjusting the Steering Wheel P. 189

Minterior Checks

The headlight aim is set by the factory, and does not need to be adjusted. However, if you regularly carry heavy items in the cargo area or tow a trailer, have the aiming readjusted at a dealer or by a qualified technician.

- Be sure items placed on the floor behind the front seats cannot roll under the seats.
 - ► They can interfere with the driver's ability to operate the pedals, the operation of the seats.
- Everyone in the vehicle must fasten their seat belt.

Fastening a Seat Belt P. 47

- Make sure that the indicators in the instrument panel come on when you start the vehicle, and go off soon after.
 - Always have a dealer check the vehicle if a problem is indicated.
 - Indicators P. 92

Maximum Load Limit

The maximum load for your vehicle is 1,340 lbs (608 kg).

See the Tire and Loading Information label attached to the driver's doorjamb.

Label Example	The comb	TIRE AND LOADING INFORMATION SEATING CAPACITY TOTAL X FRONT X REAR X ombined weight of occupants and cargo should never exceed XXXkg or XXXlbs.		
	TIRE FRONT REAR SPARE	SIZE XXXX/XXXXX XXX XXXX/XXXXX XXXX	COLD TIRE PRESSURE XXXKPA, XXPS I XXXKPA, XXPS I XXXKPA, XXPS I	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION

This figure includes the total weight of all occupants, cargo, and accessories, and the tongue load if you are towing a trailer.

Steps for Determining Correct Load Limit -

- (1) Locate the statement "The combined weight of occupants and cargo should never exceed XXX kg or XXX lbs." on your vehicle's placard.
- (2) Determine the combined weight of the driver and passengers that will be riding in your vehicle.
- (3) Subtract the combined weight of the driver and passengers from XXX kg or XXX lbs.

≫Maximum Load Limit

Overloading or improper loading can affect handling and stability and cause a crash in which you can be hurt or killed.

Follow all load limits and other loading guidelines in this manual.

Gross Vehicle Weight Rating (GVWR):

The maximum allowable weight of the vehicle, all occupants, all accessories, all cargo, and the tongue load.

Specifications P. 616

Gross Axle Weight Rating (GAWR):


The maximum allowable weight of the vehicle axle. **D** Specifications P. 616

(4) The resulting figure equals the available amount of cargo and luggage load capacity. For example, if the "XXX" amount equals 1,400 lbs. and there will be five 150 lb. passengers in your vehicle, the amount of available cargo and luggage load capacity is 650 lbs.

(1,400 - 750 (5 x 150) = 650 lbs.)

- (5) Determine the combined weight of luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage load capacity calculated in step 4.
- (6) If your vehicle will be towing a trailer, load from your trailer will be transferred to your vehicle. Consult this manual to determine how this reduces the available cargo and luggage load capacity of your vehicle.

In addition, the total weight of the vehicle, all occupants, accessories, cargo, and trailer tongue load must not exceed the Gross Vehicle Weight Rating (GVWR) or the Gross Axle Weight Rating (GAWR). Both are on a label on the driver's doorjamb.

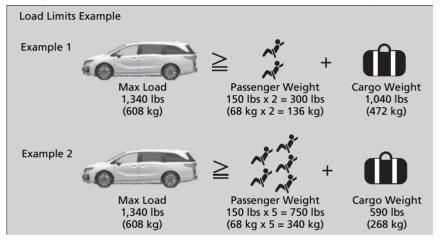

≫Maximum Load Limit

Towing a Trailer:


See Towing a Trailer to determine whether your vehicle is designed to tow a trailer.

Towing a Trailer P. 398

Towing Preparation

Towing Load Limits

Your vehicle can tow a trailer if you carefully observe the load limits, use the proper equipment, and follow the towing guidelines. Check the load limits before driving.



Total trailer weight

Do not exceed the maximum allowable weight of the trailer, cargo, and everything in or on it shown in the table. Towing loads in excess of this can seriously affect vehicle handling and performance and can damage the engine and drivetrain.

Number of occupants	Weight
2	3,500 lbs (1,587 kg)
3	3,350 lbs (1,520 kg)
4	3,150 lbs (1,429 kg)
5	3,000 lbs (1,360 kg)
6	2,000 lbs (907 kg)
7	800 lbs (363 kg)
8	Towing not recommended

Each weight limit is calculated based on the following conditions:

- Occupants fill seats from the front of the vehicle to the back
- Each occupant weighs 150 lbs (68 kg)
- Each occupant has 17.6 lbs (8 kg) of cargo in the cargo area

Any additional weight, cargo or accessories reduce the maximum trailer weight and maximum tongue load.

➢Towing Load Limits

Exceeding any load limit or improperly loading your vehicle and trailer can cause a crash in which you can be seriously hurt or killed.

Check the loading of your vehicle and trailer carefully before starting to drive.


Check if all loads are within limits at a public scale. If a public scale is not available, add the estimated weight of your cargo load to the weight of your trailer (as quoted by the manufacturer), and then measure the tongue load with an appropriate scale or tongue gauge or estimate it based on cargo distribution. Refer to the trailer owner's manual for additional information.

Break-in Period.

Avoid towing a trailer during your vehicle's first 600 miles (1,000 km).

Never exceed the gross weight ratings. Gross weight information

Vehicle Specifications P. 616



Tongue load

The weight of the tongue with a fully loaded trailer on the hitch should be approximately 10% of the total trailer weight.

• Excessive tongue load reduces front tire traction and steering control. Too little tongue load can make the trailer unstable and cause it to sway.

Towing Equipment and Accessories

Towing equipment varies by the size of your trailer, how much load you are towing, and where you are towing.

Hitches

The hitch must be of an approved type and properly bolted to the underbody.

Weight distribution hitches

Your vehicle is designed to tow without the need for a load distributing hitch. If you wish to use one, please consult your trailer maker for proper installation and set-up. Improper set-up could degrade the handling, stability, and braking performance of your vehicle.

➢Towing Equipment and Accessories

Make sure that all equipment is properly installed and maintained, and that it meets federal, state, province/ territory, and local regulations.

Consult your trailer sales or rental agency if any other items are recommended or required for your towing situation.

Consult your trailer maker for proper installation and setup of the equipment.

Improper installation and setup can affect the electrical components, handling, stability, and braking performance of your vehicle.

The lighting and wiring of trailers can vary by type and brand. If a connector is required, it should only be installed by a qualified technician.

Safety chains


Always use safety chains when you tow a trailer. Leave enough slack to allow the trailer to turn corners easily, but do not allow the chains to drag on the ground.

Trailer brakes

Recommended for any trailer with a total weight of 1,000 lbs (450 kg) or more: There are two common types of trailer brakes: surge and electric. Surge brakes are common for boat trailers, since the brakes will get wet. If you choose electric brakes, be sure they are electronically actuated. Do not attempt to attach trailer brakes to your vehicle's hydraulic system, as it will lower braking effectiveness and create a potential hazard.

Trailer light

Trailer lights and equipment must comply with federal, state, province/territory, and local regulations. Check with your local trailer sales or rental agency for the requirements in the area where you plan to tow.



We recommend that you have a dealer install a Honda wiring harness and converter. They are designed for your vehicle.

➢Towing Equipment and Accessories

Trailer packages and products available at a dealer.

- Ball mount, hitch plug, hitch pin etc.
- Wiring harness kit
- Trailer hitch kit

■Trailer light

NOTICE

Use only Honda genuine electrical connections. Do not connect the trailer lamp wiring directly to the vehicle's tail lamp. Doing so may damage the vehicle's other electrical components, resulting in malfunction.

The trailer lighting connector is located behind the left side panel in the cargo area.

Sway control

This device can be used if your trailer tends to sway. Your trailer maker can tell you what kind of sway control you need and how to install it. Improper installation could degrade the handling and stability of your vehicle.

Trailer mirrors

Many states, provinces and territories require special exterior mirrors when towing a trailer. Install special mirrors whenever you cannot clearly see behind you, or if the trailer creates a blind spot.

Driving Safely with a Trailer

Things You Need To Know Before Towing a Trailer

- Have the trailer properly serviced and keep it in good condition.
- Make sure that all the weights and load in the vehicle and trailer are within limits.
 Towing Load Limits P. 398
- Securely attach the hitch, safety chains, and other necessary parts to the trailer.
- Securely store all the items in and on the trailer so that they do not shift while driving.
- Check if the lights and brakes on the trailer are working properly.
- Check the pressure of the trailer tires, including the spare.
- Turn off the Auto Idle Stop system using the Auto Idle Stop **OFF** button. The trailer weight can affect your vehicle's brake effectiveness if Auto Idle Stop is activated on a hill while towing a trailer.

Auto Idle Stop System ON/OFF P. 423

Models with Parking Sensor System

- Turn off the rear parking sensor system. It may alert if it detects the towed object as an obstacle.
 - Turning off All Rear Sensors P. 504

Towing Speeds and Gears

- Drive slower than normal.
- Obey posted speed limits for vehicles with trailers.
- Use the **D** position when towing a trailer on level roads.

Turning and Braking

- Turn more slowly and with a wider turning arc than normal.
- Allow more time and distance for braking.
- Do not brake or turn suddenly.

Driving Safely with a Trailer

Operating speed when towing a trailer must not exceed 62 mph (100 km/h).

Parking

In addition to the normal precautions, place wheel chocks at each of the trailer's tires.

Remember to unhitch the trailer before changing a flat tire. Ask the trailer sales or rental agency where and how to store the trailer's spare tire.

➢Towing Speeds and Gears

When towing a fixed-sided trailer (e.g., camper), do not exceed 55 mph (88 km/h). At higher speeds, the trailer may sway or affect vehicle handling.

Driving

Driving in Hilly Terrain


- If the **Engine temperature near limit. Avoid heavy acceleration and high speed.** message appears on the driver information interface, turn off the climate control system and reduce speed.
- If the **Engine temperature too hot. Do not drive. Allow engine to cool.** message appears on the driver information interface, pull to the side of the road safely to cool down the engine.
- Shift to the **S** position if the transmission shifts frequently.

Towing Behind a Motorhome

Your vehicle is not designed to be towed behind a motor home. If your vehicle needs to be towed in an emergency, refer to the emergency towing information.

Emergency Towing P. 605

Starting the Engine



 Make sure the parking brake is applied.
 The parking brake and brake system indicator (red) comes on for 15 seconds when you press the electric parking brake switch.

2. Depress the brake pedal.

Starting the Engine

Keep your foot firmly on the brake pedal when starting the engine.

The engine is harder to start in cold weather and in thinner air found at altitudes above 8,000 feet (2,400 meters).

When starting the engine in cold weather, turn off all electrical accessories such as the lights, climate control system, and rear defogger in order to reduce battery drain.

If you live in a region where winter is extremely cold, an engine block heater will improve starting and warming of the engine. Consult a dealer for details.

If the exhaust system sounds abnormal or you can smell exhaust gas inside the vehicle, have your vehicle checked by a dealer. There may be a problem with the engine or exhaust system.


Bring the keyless access remote close to the **ENGINE START/STOP** button if the battery in the keyless access remote is weak.

If the Remote Battery is Weak P. 584

The engine may not start if the keyless access remote is subjected to strong radio waves.

Do not hold the **ENGINE START/STOP** button to start the engine.

If the engine does not start, wait at least 30 seconds before starting the engine again.





3. Press the **ENGINE START/STOP** button without depressing the accelerator pedal.

Starting the Engine

The immobilizer system protects your vehicle from theft.

If an improperly coded device is used, the engine's fuel system is disabled.


Immobilizer System P. 162

When you start the engine, you may feel the brake pedal slightly sink down. This is normal.

Remote Engine Start

You can remotely start the engine using the keyless access remote.

To start the engine



Press the <u>•</u> button, then press and hold the <u>•</u> button.

Some exterior lights flash once.

If the engine starts successfully, some exterior lights flash six times.

Remote Engine Start

Carbon monoxide gas is toxic and can rapidly accumulate in closed or even partly enclosed areas.

Breathing it can cause unconsciousness and even kill you.

Never use the remote engine starter with the vehicle parked in a garage or other areas with limited ventilation.

The remote engine start may violate local laws. Before using the remote engine start, check your local laws.

If there are buildings and obstacles between your vehicle and the keyless access remote, the range will be reduced.

This distance may vary by external electrical interference.





If the engine does not start, exterior lights will not flash.

► Go within the range, and try again.

When started remotely, the engine automatically shuts off after 10 minutes of idling and/or the brake pedal and **ENGINE START/STOP** button have not been pressed simultaneously.

To extend the run time for another 10 minutes during the first run, press the \square button, then press and hold the \bigcirc button.


Some exterior lights flash six times if a 10-minute extension request was transmitted successfully.

■Remote Engine Start

The engine may not start by the remote engine start if:

- You have disabled a remote engine start setting. Customized Features P. 354
- The power mode is not in VEHICLE OFF.
- The transmission is in a position other than $[\mathbf{P}]$.
- The hood is open, or any door or the tailgate is unlocked.
- You have already used the keyless access remote twice to start the engine.
- Another registered keyless access remote is in the vehicle.
- There is any antenna failure.
- The door is unlocked with the built-in key.
- The engine oil pressure is low.
- The engine coolant temperature is extremely high.
- The telematics unit malfunctions.*
- The security system alarm is not set.
- The 12-volt battery charge is too low.

To stop the engine



Press and hold the button for one second.

If the engine stops successfully, the exterior lights flash once.

not flash.

When the keyless remote is out of the keyless access system range, the exterior lights will

The engine will not stop.

▶ Go within the range, and try again.

➢ Remote Engine Start

The engine may stop while it is running if:

- You do not start the vehicle within 10 minutes of starting the engine with the keyless remote.
- The engine is stopped by using the keyless access remote.
- The security system alarm is not set.
- The door is unlocked with the built-in key.
- The hood is open, or any door or the tailgate is unlocked.
- The transmission is in a position other than **P**.
- The engine coolant temperature is extremely high.
- The battery is low.
- The engine oil pressure is low.
- The malfunction indicator lamp comes on if there is a problem with the emissions control systems.

While the engine is running, the vehicle will automatically precondition inside the vehicle. When it is warm outside:

- The climate control system is activated in recirculation mode.
- The seat ventilation is activated*
- When it is cold outside:
- The defroster is activated at a moderately warm temperature.
- The rear defogger and door mirror heaters are activated.
- The seat heaters and heated steering wheel* are activated
 - Rear Defogger/Heated Door Mirror Button P. 185
 - Front Seat Heaters* P 229
 - Heated Steering Wheel* P. 228



Starting to Drive

When the engine was started using the 🕠 button on the keyless access remote

1. Depress and hold the brake pedal, then press the ENGINE START/STOP button.

When the engine was started in any case

- **2.** Keeping your right foot on the brake pedal, press the **D**/**S** button. Select **R** when reversing.
- **3.** With the parking brake applied, release the brake pedal and gently depress the accelerator pedal.
 - ▶ Make sure the parking brake and brake system indicator (red) goes off.
 - Parking Brake P. 490
 - If the Transmission System Indicator Blinks along with the Warning Message P. 597

Hill start assist system

Hill start assist keeps the brake engaged briefly to help prevent the vehicle from rolling on inclines as you move your foot from the brake pedal to the accelerator.

Put the transmission into D or S when facing uphill, or R when facing downhill, then release the brake pedal.

Stopping the Engine

You can turn the engine off when the vehicle is completely stopped.

- **1.** Depress the brake pedal and change the gear position to \mathbf{P} .
 - ► Do not release the brake pedal until you have confirmed that **P** is shown on the gear position indicator.
- 2. Press the ENGINE START/STOP button.

Starting to Drive

When the engine was started using the O button on the keyless access remote

The engine stops when the transmission is taken out of $\boxed{\mathbf{P}}$ before the **ENGINE START/STOP** button is pressed. Follow the step 1 when starting to drive.

You can also release the parking brake by pulling the electric parking brake switch while depressing the brake pedal.

When facing downhill, you can start your vehicle more smoothly by manually releasing it with the electric parking brake switch than by releasing it with the accelerator pedal.

➢Hill start assist system

Hill start assist may not prevent the vehicle from rolling downhill on a very steep or slippery slope, and will not operate on small inclines.

Hill start assist will operate even when $\mathsf{VSA}^{\circledast}$ is switched off.

Hill start assist is not a replacement for the parking brake.

≥Stopping the Engine

The power mode will automatically turn to VEHICLE OFF about 20 minutes after the following conditions have been met:

- A door has been opened, such as when leaving the vehicle.
- The transmission is in **P**.
- The driver's seat belt is not fastened.

Precautions While Driving

🛛 In Rain

Avoid driving in deep water and on flooded roads. This can damage the engine or driveline, or cause electrical component failure.

Other Precautions

If there is a strong impact with something under the vehicle, stop in a safe location. Check the underside of the vehicle for damage or any fluid leaks.

➢Precautions While Driving

NOTICE

Do not select a shift button while pressing the accelerator pedal. You could damage the transmission.

NOTICE

If you repeatedly turn the steering wheel at an extremely low speed, or hold the steering wheel in the full left or right position for a while, the electric power steering (EPS) system heats up. The system goes into a protective mode and limits its performance. The steering wheel becomes harder and harder to operate. Once the system cools down, the EPS system is restored.

Repeated operation under these conditions can eventually damage the system.

If the power mode is set to ACCESSORY while driving, the engine will shut down and all steering and brake power assist functions will stop, making it difficult to control the vehicle.

Do not select $\boxed{\mathbf{N}}$ while driving as you will lose engine braking (and acceleration) performance.

During the first 600 miles (1,000 km) of operation, avoid sudden acceleration or full throttle operation so as not to damage the engine or powertrain.

Avoid hard braking for the first 200 miles (300 km) after purchasing your new vehicle or replacing the brake pads or rotors, to allow for proper break-in.

Automatic Transmission

Creeping

When the engine runs at higher idle speeds, the creeping force increases. Keep the brake pedal firmly depressed when stopped or ensure that brake-hold is engaged.

Kickdown

Quickly depressing the accelerator pedal while driving uphill may cause the transmission to drop to a lower gear, unexpectedly increasing vehicle speed. Depress the accelerator pedal carefully, especially on slippery roads and curves.

Shifting

Change the gear position in accordance with your driving needs.

Ρ

R

D/S

Shift positions



Park

Used when parking or starting the engine Transmission is locked

Reverse

Used when reversing

Neutral Transmission is not locked

Drive/S Position

Each time you press the D/S button, the mode switches between Drive and S Position mode. Used for:

Drive

- Normal driving (gears change between1st and 10th automatically)
- Temporarily driving in the sequential mode

S Position

- Automatically changing gears between 1st and 8th (8th gear is used only at high speed)
- Driving in the sequential mode

≫Shifting

The vehicle can roll away if left unattended without confirming that Park is engaged.

A vehicle that rolls away could cause a crash resulting in serious injury or death.


Always keep your foot on the brake pedal until you have confirmed that \underline{P} is shown on the gear position indicator.

To prevent malfunction and unintended engagement:

- Do not spill any liquids on or around shift buttons.
- Do not place or drop any objects on or around shift buttons.
- Do not let passengers or children operate the shift buttons.

The beeper sounds and the message appears on the driver information interface when you depress the accelerator pedal with the gear position in [N]. Change the gear position to [D] or [R] with the brake pedal depressed.


■ P (park) button



Park your vehicle in a safe place with the power mode in ON, then apply the brakes and press the $\[P\]$ button to put the transmission in Park.

The indicators on the sides of the $[\mathbf{P}]$ button come on.

Shift Operation

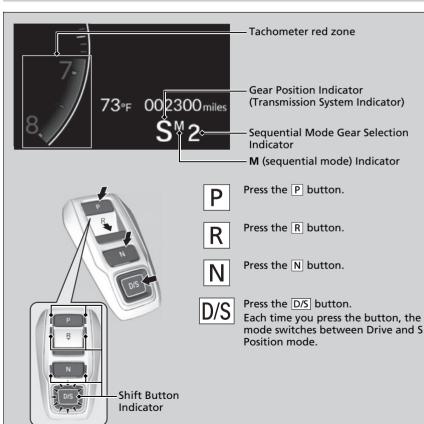

Shift Operation

NOTICE

When you change \boxed{D} to \boxed{R} and vice versa, depress the brake pedal to come to a complete stop, then select the intended gear position while maintaining brake pressure.

Always keep your foot on the brake pedal until you have confirmed that \fbox{P} is shown on the gear position indicator.

Use the gear position indicator and the shift button indicator to check the gear position before selecting a shift button.

If the transmission system indicator blinks when driving, in any shift position, there is a problem with the transmission.

Avoid sudden acceleration and have the transmission checked by a dealer as soon as possible.

The fuel supply may be cut off if you drive at engine speeds in or over the tachometer red zone (engine speed limit). If this happens, you may experience a slight jolt.

When shifting gears in extremely low temperatures (-22°F/-30°C), there may be a short delay before the gear position is indicated in the display. Always confirm you are in the correct gear before driving.

When the engine speed is increased while the transmission is in [N], [P] or [R], the fuel supply may be cut off even without the engine speed entering the tachometer red zone.

The beeper sounds once when you change to **ℝ**. **≥** Customized Features P. 354

When opening the driver's door

If you open the driver's door under the following conditions, the gear position automatically changes to **P**;

- The vehicle is stationary with the engine running, or moving at 1 mph (2 km/h) or slower.
- The transmission is in other than **P**.
- You have unfastened the driver side seat belt.
 - ▶ If you manually change the gear position from P with the brake pedal depressed, the gear position will automatically return to P once you release the brake pedal.

■ When turning off the power mode

If you turn the engine off while the vehicle is stationary, and the transmission is in other than $[\mathbf{P}]$, the gear position automatically changes to $[\mathbf{P}]$.

When opening the driver's door

While the system is designed to automatically change the gear position to \boxed{P} under the described conditions, in the interest of safety you should always select \boxed{P} before opening the driver's door. Make sure to park the vehicle in a safe place.

When Stopped P. 499

If you want to drive the vehicle after the gear position has automatically changed to P under the described conditions, close the door, fasten the seat belt, depress the brake pedal, then change the gear position.

If you leave the vehicle, turn off the engine and lock the doors.

■ If you want to keep the transmission in N position [car wash mode]

With the engine running:

- 1. Press and hold the brake pedal.
- **2.** Select **N**, then release the button to display (Neutral) **N** hold mode on the driver information interface.
- **3.** Press and hold **N** again for two seconds.
 - This puts the vehicle in car wash mode which must be used when your vehicle is pulled through a conveyor type automatic car wash where you or an attendant do not remain in the vehicle.



If the **ENGINE STOP/START** button is pressed after car wash mode has been activated, the power mode will change to ACCESSORY and a message will be displayed on the driver information interface.

- For 15 minutes the gear position remains
- in **N** with the power mode in ACCESSORY. After that, the position automatically changes to **P** and the power mode changes to OFF.
- Manually changing to P cancels ACCESSORY mode. The P indicator comes on and the power mode changes to OFF. You must always shift to P when car wash mode is no longer needed.

If you want to keep the transmission in N position [car wash mode]

NOTICE

When transmission is too hot, car wash mode may not be available. Let the engine idle and cool down transmission.



The transmission may not stay in $\boxed{\mathbf{N}}$ position while the following indicators is on:

- Transmission system indicator.
- Malfunction indicator lamp.
- Charging system indicator.

Restrictions on selecting a gear position

You cannot select a gear position under certain circumstances that may lead to a crash.

When the transmission is in:	1. Under these circumstances:	2. If you try to change to the following:	3. The gear position remains in/changes to:	How to change the gear position
Ρ	The brake pedal is not depressed.		P	
	The accelerator pedal is depressed.			Release the accelerator pedal and depress the brake pedal.
N	The vehicle is moving at low speed without the brake pedal depressed.	Other gear position	N	
	The vehicle is moving at low speed with the accelerator pedal depressed.			
N, D or S	The vehicle is moving forward.	R	a safe place, depre	Stop your vehicle in a safe place, depress
R or N	The vehicle is moving backward.	D, S		
R, N, D or S	The vehicle is moving.	Ρ		

Sequential Mode

Use the paddle shifters to change between 1st and 10th gears without removing your hands from the steering wheel. The transmission will switch to the sequential mode.

■ When the transmission is in D:

The vehicle will go into the sequential mode momentarily, and the sequential mode gear selection indicator will come on.

When the vehicle goes into the sequential mode by — paddle shifter and the lower gear is available, the transmission properly selects single or double gear change.

Once you start traveling at a constant speed, the sequential mode will automatically switch off, and the sequential mode gear selection indicator will go off.

Hold the + paddle shifter for two seconds to return to normal drive.


■ When the transmission is in S:

The vehicle will go into the sequential mode, and the **M** (sequential mode) indicator and sequential mode gear selection indicator will come on.

If the vehicle speed increases and the engine speed reaches near the tachometer red zone, the transmission automatically shifts up to the next gear.

Holding the + paddle shifter for two seconds will cancel this mode. When the sequential mode is canceled, the sequential mode indicator and sequential mode gear selection indicator go off.

Sequential Mode Operation

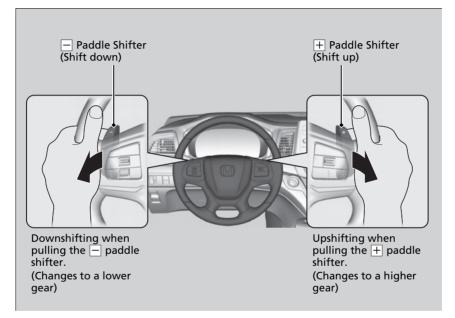

Sequential Mode Operation

Each paddle shift operation makes a single or double gear change.

To change gears continuously, release the paddle shifter before pulling it again for the next gear.

If the sequential mode gear selection indicator blinks when you try to shift up or down, this means your vehicle speed is not in its allowable gear range or the protection of transmission system is necessary. Slightly accelerate to shift up and decelerate to shift down while the indicator is blinking.



ECON Mode



The **ECON** button turns the ECON mode on and off.

The ECON mode helps you improve your fuel economy by adjusting the performance of the engine and air conditioning system.

ECON Mode


While in ECON mode, the climate control system has greater temperature fluctuation.

Due to emergency brakes operation or driving conditions, you may not be able to change the mode.

Intelligent Traction Management

The Intelligent Traction Management optimizes vehicle performance to help you drive on various surfaces. The system has available modes to select from: **Normal** and **Snow**.

Press the **SNOW** button to select the appropriate mode. The mode you select appears on the driver information interface. When the vehicle is turned off and restarted, Intelligent Traction Management mode will revert to **Normal**.

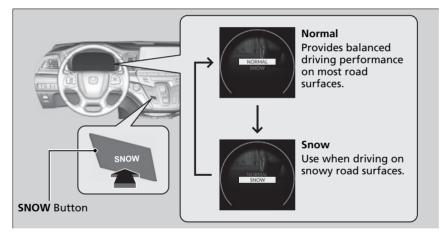

Auto Idle Stop

To help maximize fuel economy, the engine automatically stops when the vehicle comes to a stop, depending on environmental and vehicle operating conditions. The indicator (green) comes on at this time.



The environmental and vehicle conditions that impact Auto Idle Stop system operation are varied.

Auto Idle Stop Activates When: P. 424, 425

The engine then restarts once the vehicle is about to move again, and the indicator (green) goes off.

The Engine Automatically Restarts When: P. 425

If the driver's door is opened while the indicator (green) comes on, a buzzer sounds to notify you that the Auto Idle Stop function is in operation.

➢Auto Idle Stop

The 12-volt battery installed in this vehicle is specifically designed for a model with Auto Idle Stop. Using a 12-volt battery other than this specified type may shorten the 12-volt battery life, and prevent Auto Idle Stop from activating. If you need to replace the 12-volt battery, make sure to select the specified type. Ask a dealer for more details.

The duration of the Auto Idle Stop operation:

Increase in the ECON mode, compared to when the ECON mode is off, with climate control in use.
 ECON Mode P. 420



The Auto Idle Stop suspend indicator comes on and a message appears on the driver information interface when the Auto Idle Stop system cannot be activated.

Indicators P. 92
Auto Idle Stop System ON/OFF P. 423

Auto Idle Stop System ON/OFF



To turn the Auto Idle Stop system off, press this button. The Auto Idle Stop system stops.

The Auto Idle Stop system will stop and the indicator will come on.

The Auto Idle Stop system is turned on every time you start the engine, even if you turned it off the last time you drove the vehicle.

➢Auto Idle Stop System ON/OFF

If you turn off the Auto Idle Stop system while it is activated, the engine will restart.

If you press and hold the Auto Idle Stop **OFF** button, you can select whether to display the status messages or not.

Auto Idle Stop Activates When:

The vehicle stops with the gear position in D and the brake pedal depressed. When you put the transmission into P, the Auto Idle Stop continues to operate, even if the brake pedal is released.

▶ If you depress the brake pedal, the engine may automatically restart.

Auto Idle Stop does not activate when:

- The Auto Idle Stop **OFF** button is pressed.
- The driver's seat belt is not fastened.
- The engine is not adequately warmed up or coolant temperature is high.
- The transmission fluid temperature is low or high.
- The vehicle comes to a stop again before the vehicle speed reaches 3 mph (5 km/ h) after the engine starts.
- The vehicle is stopped on a steep incline.
- The transmission is in a position other than D/S.
- The engine is started with the hood open.
 - ► Turn off the engine. Close the hood before you restart the engine to activate Auto Idle Stop.
- The battery charge is low.
- The internal temperature of the battery is 14°F (-10°C) or less.
- The climate control system is in use, and the outside temperature is below -4°F (-20°C) or over 104°F (40°C).
- The climate control system is in use, and the temperature is set to Hi or Lo.
- 👘 is on (indicator on).
- When the Intelligent Traction Management is set to **Snow**.

▶Auto Idle Stop Activates When:

Do not open the hood while the Auto Idle Stop function is activated. If the hood is opened, the engine will not restart automatically. In this case, restart the engine with the **ENGINE**

START/STOP button.

Starting the Engine P. 404

Pressing the **ENGINE START/STOP** button causes the engine to no longer restart automatically. Follow the standard procedure to start the engine.

Starting the Engine P. 404

When ACC with Low Speed Follow is in operation, the vehicle stops without depressing the brake pedal and Auto Idle Stop may activate. In such cases, the engine may restart if you change the shift position other than \overline{D} .

Auto Idle Stop may not activate when:

- The vehicle is stopped by braking suddenly.
- The steering wheel is operated.
- The fan speed is high.
- The climate control system is in use, and there is a significant difference between the set temperature and the actual interior temperature.
- The climate control system is in use, and humidity in the interior is high.

The Engine Automatically Restarts When:

- The brake pedal is released (without the automatic brake hold system activated).
- The accelerator pedal is depressed (with the automatic brake hold system activated).

Automatic Brake Hold P. 494

The Engine Automatically Restarts When:

If you are using an electronic device during Auto Idle Stop, the device may temporarily be turned off when the engine restarts.

■ The engine restarts even if the brake pedal is depressed^{*1} when:

- The Auto Idle Stop **OFF** button is pressed.
- The steering wheel is operated.
- The transmission is put into $[\mathbf{R}]$ or $[\mathbf{S}]$, or when it is set from $[\mathbf{N}]$ to $[\mathbf{D}]$.
 - ► If you put the transmission into **P** after the Auto Idle Stop activates, the Auto Idle Stop continues to operate. In this case, the engine restarts when you depress the brake pedal.
- The pressure on the brake pedal is reduced and the vehicle starts moving while stopped on an incline.
- The brake pedal is released slightly during a stop.
- The battery charge becomes low.
- The accelerator pedal is depressed.
- The driver's seat belt is unlatched.
- is on (indicator on).
- The climate control system is in use, and the difference between the set temperature and actual interior temperature becomes significant.
- The climate control system is being used to dehumidify the interior.
- When the Intelligent Traction Management is set to **Snow**.
- The vehicle ahead of you starts again when your vehicle stops automatically with ACC with Low Speed Follow.

Starting Assist Brake Function

Briefly keeps the brake applied after releasing the brake pedal to restart the engine. This can keep your vehicle from unexpectedly moving while on an incline. The engine restarts even if the brake pedal is depressed^{*1} when:

*1: With the automatic brake hold system activated, you can release the brake pedal while Auto Idle Stop is in operation.


If the automatic brake hold system has been turned off, or if there is a problem with the system, the engine will restart automatically when you release the brake pedal.

■ Automatic Brake Hold P. 494

Vehicle Stability Assist[™] (VSA[®]), aka Electronic Stability Control (ESC), System

VSA[®] helps stabilize the vehicle during cornering if the vehicle turns more or less than what was intended. It also assists in maintaining traction on slippery surfaces. It does so by regulating engine output and selectively applying the brakes.

VSA[®] Operation



When VSA[®] activates, you may notice that the engine does not respond to the accelerator. You may also notice some noise from the hydraulic brake system. You will also see the indicator blink. Wehicle Stability Assist[™] (VSA[®]), aka Electronic Stability Control (ESC), System


The VSA® may not function properly if tire type and size are mixed. Make sure to use the same size and type of tire, and the air pressures as specified.

When the VSA® system indicator comes on and stays on while driving, there may be a problem with the system. While this may not interfere with normal driving, have your vehicle checked by a dealer immediately.

VSA® cannot enhance stability in all driving situations and does not control the entire braking system. You still need to drive and corner at speeds appropriate for the conditions and always leave a sufficient margin of safety.

The main function of the VSA® system is generally known as Electronic Stability Control (ESC). The system also includes a traction control function.

VSA[®] On and Off



This button is on the driver side control panel. To partially disable VSA[®] functionality/ features, press and hold it until you hear a beep.

Your vehicle will have normal braking and cornering ability, but traction control function will be less effective.

To restore VSA^{\otimes} functionality/features, press the \mathbb{R} (VSA^{\otimes} **OFF**) button until you hear a beep.

VSA[®] is turned on every time you start the engine, even if you turned it off the last time you drove the vehicle.

Wehicle Stability Assist[™] (VSA[®]), aka Electronic Stability Control (ESC), System

In certain unusual conditions when your vehicle gets stuck in shallow mud or fresh snow, it may be easier to free it with the VSA® temporarily switched off.

When the B button is pressed, the traction control function becomes less effective. This allows for the wheels to spin more freely at low speed. You should only attempt to free your vehicle with the VSA® off if you are not able to free it when the VSA® is on.

Immediately after freeing your vehicle, be sure to switch VSA® on again. We do not recommend driving your vehicle with the VSA® system switched off.

You may hear a motor sound coming from the engine compartment while system checks are being performed immediately after starting the engine or while driving. This is normal.

Agile Handling Assist

Lightly brakes each of the front and rear wheels, as needed, when you turn the steering wheel, and helps support the vehicle's stability and performance during cornering.


➢Agile Handling Assist

The agile handling assist cannot enhance stability in all driving situations. You still need to drive and corner at speeds appropriate for the conditions and always leave a sufficient margin of safety.

When the VSA® system indicator comes on and stays on while driving, the agile handling assist does not activate.

You may hear a sound coming from the engine compartment while the agile handling assist is activated. This is normal.

Tire Pressure Monitoring System (TPMS) with Tire Fill Assist



Monitors the tire pressure while you are driving. If your vehicle's tire pressure becomes significantly low, the Low Tire Pressure/TPMS indicator comes on and a message appears on the driver information interface.

➢Tire Pressure Monitoring System (TPMS) with Tire Fill Assist

Conditions such as low ambient temperature and altitude change directly affect tire pressure and can trigger the Low Tire Pressure/TPMS indicator to come on.

➢ If the Low Tire Pressure/TPMS Indicator Comes On or Blinks P. 596

Tire pressure checked and inflated in:

- Warm weather can become under-inflated in colder weather.
- Cold weather can become overinflated in warmer weather.

The Low Tire Pressure/TPMS indicator will not come on as a result of overinflation.

Only use genuine wheels equipped with TPMS since your vehicle's wheels are equipped with the low tire pressure/TPMS sensor.


If you drive your vehicle without the genuine TPMS specified wheels, the Low Tire Pressure/TPMS indicator blinks for one minutes and then stays on.

Tire and Wheel Replacement P. 557

The TPMS audibly and visually informs you of changes in tire pressure of the individual tire that you are adjusting.

Tire Fill Assist Function P. 596

Tire Pressure Monitor



To select the tire pressure monitor, please follow the following steps using the buttons on the steering wheel.

- **1.** Set the power mode to ON.
- 2. Press the 🔺 (home) button.
- **3.** Roll the left selector wheel to scroll to the **Tire pressure**.
- 4. Press the left selector wheel.

The pressure for each tire is displayed in psi.

Tire pressures low is displayed when a tire has significantly low pressure. The specific tire is displayed on the screen.

Tire Pressure Monitor

The pressure displayed on the driver information interface can be slightly different from the actual pressure as measured by a gauge. If there is a significant difference between the two values, or if the Low Tire Pressure/TPMS indicator and the message on the driver information interface do not go off after you have inflated the tire to the specified pressure, have the system checked by a dealer.

Tire pressure monitor system problem. may appear if you drive with the compact spare tire, or there is a problem with the TPMS.

The system checks each tire's position on the vehicle each time the power mode is set to ON. "--" is displayed when the vehicle has not yet identified the location each sensor or when there is a problem. To allow the vehicle to identify the sensor locations, drive at a speed of more than 25 mph (40 km/h) until each tire pressure is displayed.

If the pressure display does not update even after driving for one minute or if "--" is displayed for each wheel with an amber tire icon, have your vehicle checked by a dealer.



Driving

Tire Pressure Monitoring System (TPMS) - Required Federal Explanation

Each tire, including the spare (if provided), should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label.

(If your vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label, you should determine the proper tire inflation pressure for those tires.)

As an added safety feature, your vehicle has been equipped with a tire pressure monitoring system (TPMS) that illuminates a low tire pressure telltale

(!)

when one or more of your tires is significantly under-inflated.

Accordingly, when the low tire pressure telltale illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure.

Driving on a significantly under-inflated tire causes the tire to overheat and can lead to tire failure. Under-inflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability. Please note that the TPMS is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if under-inflation has not reached the level to trigger illumination of the TPMS low tire pressure telltale.

Your vehicle has also been equipped with a TPMS malfunction indicator to indicate when the system is not operating properly. The TPMS malfunction indicator is combined with the low tire pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists.

When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended.

TPMS malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS from functioning properly.

Always check the TPMS malfunction telltale after replacing one or more tires or wheels on your vehicle to ensure that the replacement or alternate tires and wheels allow the TPMS to continue to function properly.

Blind Spot Information System


Is designed to detect vehicles in specified alert zones adjacent to your vehicle, particularly in harder to see areas commonly known as "blind spots." When the system detects vehicles approaching from behind in adjacent lanes, the appropriate indicator comes on for a few seconds, providing assistance when you change lanes.

How the system works

- The transmission is in D or S.
- Your vehicle speed is between 20 mph (32 km/h) and 100 mph (160 km/h)

Alert zone range

A: Approx. 1.6 ft. (0.5 m) B: Approx. 10 ft. (3 m) C: Approx. 10 ft. (3 m)

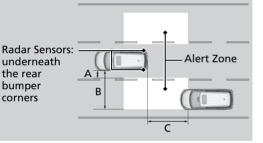

➢Blind Spot Information System

Failure to visually confirm that it is safe to change lanes before doing so may result in a crash and serious injury or death. Do not rely only on the blind spot information system when changing lanes. Always look in your mirrors, to either side of your vehicle, and behind you for other vehicles before changing lanes.

Important Safety Reminder

Like all assistance systems, blind spot information system has limitations. Overreliance on the blind spot information system may result in a collision.

The blind spot information system alert indicator may not come on under the following conditions:

- A vehicle does not stay in the alert zone for more than two seconds.
- A vehicle is parked in a side lane.
- The speed difference between your vehicle and the vehicle you are passing is greater than 6 mph (10 km/h).
- An object not detected by the radar sensors approaches or passes your vehicle.
- A vehicle running in the adjacent lane is a motorcycle or other small vehicle.

The system is for your convenience only. Even if an object is within the alert zone, the following situations may occur.

- The blind spot information system alert indicator does not come on and the Blind spot information system not available message appears on the driver information interface.
- The blind spot information system alert indicator may come on even with the message displayed.


When the system detects a vehicle

Blind spot information System Alert Indicator: Located near the pillar on both sides.

Comes on when:

- A vehicle enters the alert zone from behind to overtake you with a speed difference of no more than 31 mph (50 km/h) from your vehicle.
- You pass a vehicle with a speed difference of no more than 12 mph (20 km/h).

Blinks and a beeper sounds when: You move the turn signal lever in the direction of the detected vehicle. The beeper sounds three times.



➢Blind Spot Information System

You can change the setting for the blind spot information system.

Customized Features P. 354

Turn the system off when towing a trailer. The system may not work properly for the following reasons:

- The added mass tilts the vehicle and changes the radar coverage.
- The trailer itself can be detected by the radar sensors, causing the blind spot information system alert indicators to come on.

Blind spot information system may be adversely affected when:

- Objects (guard rails, poles, trees, etc.) are detected.
- An object that does not reflect radio waves well, such as a motorcycle, is in the alert zone.
- Driving on a curved road.
- A vehicle is moving from a far lane to the adjacent lane.
- The system picks up external electrical interference.
- The rear bumper or the sensors have been improperly repaired or the rear bumper has been deformed.
- The orientation of the sensors has been changed.
- In bad weather (Heavy rain, snow, and fog).

For a proper blind spot information system operation:

- Always keep the rear bumper corner area clean.
- Do not cover the rear bumper corner area with labels or stickers of any kind.
- Take your vehicle to a dealer if you need the rear bumper corner area or the radar sensors to be repaired, or the rear bumper corner area is strongly impacted.

The system does not operate when in $[\mathbf{R}]$.

Blind spot information system on and off

You can turn the system on and off using the driver information interface. Switching the Display P. 113 Safety Support P. 120

The blind spot information system is in the previously selected on or off setting each time you start the engine.

Assists with functions such as acceleration, braking, and steering in order to reduce the burden on the driver, as well as help avoid or reduce the severity of collisions.

Honda Sensing® has the following functions:


■ The functions that do not require switch operations to activate

- Collision Mitigation Braking System[™] (CMBS[™]) ₽. 440
- Road Departure Mitigation System ₽ P. 451
- Traffic Sign Recognition System ₽ P. 482
- Auto High-Beam ₽ P. 179
- Blind Spot Information System ₽ P. 434
- Cross Traffic Monitor ₽ P. 505
- Parking Sensor System^{*} ₽ P. 500

■ The functions that require switch operations to activate

- Adaptive Cruise Control (ACC) with Low Speed Follow ₽ P. 456
- Lane Keeping Assist System (LKAS) ₽ P. 472

Operation Switches for the ACC with Low Speed Follow/ Lane Keeping Assist System (LKAS)



🔳 ि Button

Press to activate standby mode for ACC with Low Speed Follow. Or press to cancel the system.

LKAS Button

Press to activate standby mode for LKAS. Or press to cancel the system.

RES/+/SET/- Switch

Press the **RES/+/SET/–** switch up to set or resume the ACC with Low Speed Follow or increase the vehicle speed. Press the **RES/+/ SET/–** switch down to set the ACC with Low Speed Follow or decrease the vehicle speed.


Interval Button

Press to change the ACC with Low Speed Follow following-interval.

CANCEL Button

Press to cancel ACC with Low Speed Follow.

Gauge Content



You can see the current state of Adaptive Cruise Control (ACC) with Low Speed Follow, Lane Keeping Assist System (LKAS).

- Indicates that ACC with Low Speed Follow is ready to be activated.
- Green: The system is on.
- White: The system is standby.
- Amber: There is a problem with the system.
 2 Indicates that LKAS is ready to be activated.
- Green: The system is operating.
- White: The system is standby.
- Amber: There is a problem with the system.
- Indicates that LKAS is activated and whether or not traffic lane lines are detected.
- Green lines: The system is operating.
- Amber line: Lane departure is detected.
- Indicates whether or not a vehicle is detected ahead.
- S Indicates that ACC with Low Speed Follow shows the set vehicle speed.
- **6** Indicates that ACC with Low Speed Follow shows the set vehicle interval.

Collision Mitigation Braking System™ (CMBS™)

The system can assist you when it determines there is a possibility of your vehicle colliding with a vehicle or a pedestrian detected in front of your vehicle. The CMBS[™] is designed to alert you when the potential for a collision is determined, as well as to reduce your vehicle speed to help minimize collision severity when a collision is deemed unavoidable.

➢Collision Mitigation Braking System[™] (CMBS[™])

Important Safety Reminder

The CMBS[™] is designed to reduce the severity of an unavoidable collision. It does not prevent a collisions nor stop the vehicle automatically. It is still your responsibility to operate the brake pedal and steering wheel appropriately according to the driving conditions.

The CMBS[™] may not activate or may not detect a vehicle in front of your vehicle under certain conditions:


CMBS[™] Conditions and Limitations P. 445

For directions on the proper handling of the radar sensor, refer to the following page.

You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 487

How the System Works

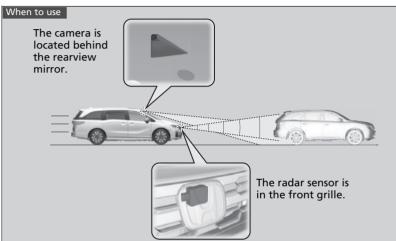

The system starts monitoring the roadway ahead when your vehicle speed is about 3 mph (5 km/h) or above and there is a vehicle in front of you.

The CMBS[™] activates when:

- The speed difference between your vehicle and a vehicle or pedestrian detected in front of you becomes about 3 mph (5 km/h) and over with a chance of a collision.
- Your vehicle speed is about 62 mph (100 km/h) or less and the system determines there is a chance of a collision with:

- Vehicles detected in front of you that are stationary, oncoming, or traveling in your same direction.

- A pedestrian who is detected in front of you.
- Your vehicle speed is above 62 mph (100 km/h), and the system determines there is a chance of a collision with a vehicle detected in front of you traveling in your same direction.


➢How the System Works

When the CMBS[™] activates, it may automatically apply the brake. It will be canceled when your vehicle stops or a potential collision is not determined.

When the system activates

The system provides visual and audible alerts of a possible collision, and stops if the collision is avoided.

• Take appropriate action to prevent a collision (apply the brakes, change lanes, etc.)

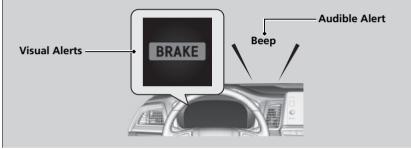

Driving

You can change the distance (**Long/Normal/Short**) between vehicles at which the system's earliest collision alert will come on.

Customized Features P. 354

When in **Long**, visual and audible alerts come on at a longer distance from a vehicle ahead than in **Normal** setting, and in **Short**, at a shorter distance than in **Normal**.

When the system activates

The camera in the CMBS[™] is also designed to detect pedestrians.

However, this pedestrian detection feature may not activate or may not detect a pedestrian in front of your vehicle under certain conditions.

Refer to the ones indicating the pedestrian detection limitations from the list.

CMBS[™] Conditions and Limitations P. 445

Collision Alert Stages

The system has three alert stages for a possible collision. However, depending on circumstances, the CMBS[™] may not go through all of the stages before initiating the last stage.

Distance between vehicles		CMBS™		
		The sensors detect a vehicle	Audible & Visual WARNINGS	Braking
Stage one	Normal Vehicle Long Short Ahead	There is a risk of a collision with the vehicle ahead of you.	The visual alert flashes. If the distance between your vehicle and the vehicle in front of you continues to decrease, the audible alert sounds in addition to the visual alert flashing. ► The collision warning distance can be changed. € Customized Features P. 354	
Stage two	Your Vehicle Vehicle Ahead	The risk of a collision has increased, time to respond is reduced.	Visual and audible alerts.	Lightly applied
Stage three	Your Vehicle Vehicle Ahead	The CMBS [™] determines that a collision is unavoidable.		Forcefully applied

Driving

■ CMBS[™] On and Off

You can turn the system on and off using the driver information interface. Switching the Display P. 113 Safety Support P. 120

The CMBS[™] is turned on every time you start the engine, even if you turned it off the last time you drove the vehicle.

➤CMBSTM On and Off

You cannot turn the CMBS[™] off while driving.

The CMBS[™] may automatically shut off, and the safety support indicator (amber) will come and stay on under certain conditions:

CMBS[™] Conditions and Limitations P. 445

When the CMBSTM is activated, it will continue to operate even if the accelerator pedal is partially depressed. However, it will be canceled if the accelerator pedal is fully depressed.

Have your vehicle checked by a dealer if you find any unusual behavior of the system (e.g., the warning message appears too frequently).

CMBS[™] Conditions and Limitations

The system may automatically shut off and the safety support indicator (amber) will come on under certain conditions. Some examples of these conditions are listed below. Other conditions may reduce some of the CMBS[™] functions.

Front Sensor Camera P. 487

Radar Sensor P. 489

Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as an entrance or exit of a tunnel.
- There is little contrast between objects and the background.
- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Driving in the shadows of trees, buildings, etc.
- Roadway objects or structures are misinterpreted as vehicles and pedestrians.
- Reflections on the interior of the windshield.
- Driving at night or in a dark place such as a tunnel (due to low-light conditions, pedestrians or other vehicles may not be detected).

Roadway conditions

- Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).
- Driving on curvy, winding, or undulating roads.
- The road is hilly or the vehicle is approaching the crest of a hill.

Vehicle conditions

- Headlight lenses are dirty or the headlights are not properly adjusted.
- The outside of the windshield is blocked by dirt, mud, leaves, wet snow, etc.
- The inside of the windshield is fogged.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- When tire chains are installed.
- The vehicle is tilted due to a heavy load or suspension modifications.
- The camera temperature gets too high.
- Driving with the parking brake applied.
- When the radar sensor behind the Honda emblem gets dirty.
- The vehicle is towing a trailer.
- Driving at night or in a dark place (e.g., a tunnel) with the headlights off.

Detection limitations

- A vehicle or pedestrian suddenly crosses in front of you.
- The distance between your vehicle and the vehicle or pedestrian ahead of you is too short.
- A vehicle cuts in front of you at a slow speed, and it brakes suddenly.
- When you accelerate rapidly and approach the vehicle or pedestrian ahead of you at high speed.
- The vehicle ahead of you is a motorcycle, bicycle, mobility scooter or other small vehicle.
- When there are animals in front of your vehicle.
- When you drive on a curved, winding or undulating road that makes it difficult for the sensor to properly detect a vehicle in front of you.
- The speed difference between your vehicle and a vehicle or pedestrian in front of you is significantly large.
- An oncoming vehicle suddenly comes in front of you.
- Another vehicle suddenly comes in front of you at an intersection, etc.
- Your vehicle abruptly crosses over in front of an oncoming vehicle.
- When driving through a narrow iron bridge.
- When the lead vehicle suddenly slows down.

Limitations applicable to pedestrian detection only

- When there is a group of people in front of your vehicle walking together side by side.
- Surrounding conditions or belongings of the pedestrian alter the pedestrian's shape, preventing the system from recognizing that the person is a pedestrian.
- When the pedestrian is shorter than about 3.3 feet (1 meter) or taller than about 6.6 feet (2 meters) in height.
- When a pedestrian blends in with the background.
- When a pedestrian is bent over or squatting, or when their hands are raised or they are running.
- When several pedestrians are walking ahead in a group.
- When the camera cannot correctly identify that a pedestrian is present due to an unusual shape (holding cargo, body position, size).

Automatic shutoff

The CMBS[™] may automatically shut itself off and the safety support indicator (amber) comes and stays on when:

- The temperature inside the system is high.
- You drive off-road or on a mountain road, or curved and winding road for an extended period.
- An abnormal tire condition is detected (incorrect tire size, flat tire, etc.).
- The camera behind the rearview mirror, or the area around the camera, including the windshield, gets dirty.

Once the conditions that caused CMBS[™] to shut off improve or are addressed (e.g., cleaning), the system comes back on.

With Little Chance of a Collision


The CMBS[™] may activate even when you are aware of a vehicle ahead of you, or when there is no vehicle ahead. Some examples of this are:

When passing

Your vehicle approaches another vehicle ahead of you and you change lanes to pass.


At an intersection

Your vehicle approaches or passes another vehicle that is making a left or right turn.

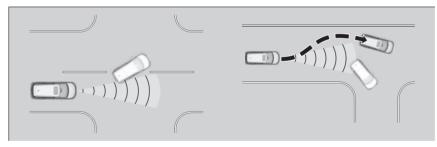

On a curve

When driving through curves, your vehicle comes to a point where an oncoming vehicle is right in front of you.




Through a low bridge at high speed

You drive under a low or narrow bridge at high speed.

Speed bumps, road work sites, train tracks, roadside objects, etc.

You drive over speed bumps, steel road plates, etc., or your vehicle approaches train tracks or roadside objects [such as a traffic sign and guard rail] on a curve or, when parking, stationary vehicles and walls.



Road Departure Mitigation System

Alerts and helps assist you when the system detects a possibility of your vehicle unintentionally crossing over detected lane markings and/or leaving the roadway altogether.

How the System Works



The front camera behind the rearview mirror monitors left and right lane markings (in white or yellow). If your vehicle is getting too close to detected lane markings without a turn signal activated, the system, in addition to a visual alert, applies steering torque and alerts you with rapid vibrations on the steering wheel, to help you remain within the detected lane.

Customized Features P. 354

As a visual alert, the **Lane departure** message appears on the driver information interface.

If the system determines that its steering input is insufficient to keep your vehicle on the roadway, it may apply braking.

Braking is applied only when the lane markings are solid continuous lines.

The system cancels assisting operations when you turn the steering wheel to avoid crossing over detected lane markings.

If the system operates several times without detecting driver response, the system beeps to alert you.

≥Road Departure Mitigation System

Important Safety Reminder

Like all assistance systems, the Road Departure Mitigation system has limitations.

Overreliance on the Road Departure Mitigation system may result in a collision. It is always your responsibility to keep the vehicle within your driving lane.

The Road Departure Mitigation system only alerts you when lane drift is detected without a turn signal in use. The Road Departure Mitigation system may not detect all lane markings or lane or roadway departures; accuracy will vary based on weather, speed and lane marker condition. It is always your responsibility to safely operate the vehicle and avoid collisions.

You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 487

The Road Departure Mitigation system may not work properly or may work improperly under the certain conditions:

Road Departure Mitigation Conditions and Limitations P. 454

There are times when you may not notice Road Departure Mitigation functions due to your operation of the vehicle, or road surface conditions.

How the System Activates

The system activates when all of the following conditions are met:

- The vehicle is traveling between about 45 and 90 mph (72 and 145 km/h).
- The vehicle is on a straight or slightly curved road.
- The turn signals are off.
- The brake pedal is not depressed.
- The wipers are not in high speed operation.
- The system makes a determination that the driver is not actively accelerating, braking, or steering.

➢Road Departure Mitigation System

You can change the settings for the Road Departure Mitigation system.

If LKAS is off, the message below may appear if the system has determined that there is a possibility of your vehicle crossing over detected lane markings.

Customized Features P. 354



How the System Activates

The Road Departure Mitigation system may automatically shut off and the safety support indicator (amber) comes and stays on.

Indicators P. 92

Road Departure Mitigation system function can be impacted when the vehicle is:

- Not driven within a traffic lane.
- Driven on the inside edge of a curve, or outside of a lane.
- Driven in a narrow lane.

Road Departure Mitigation On and Off

You can turn the system on and off using the driver information interface. Switching the Display P. 113 Safety Support P. 120

The Road Departure Mitigation is in the previously selected on or off setting each time you start the engine.

▶ Road Departure Mitigation On and Off

When you have selected **Warning Only**, the system does not operate the steering wheel and braking. Customized Features P. 354

Road Departure Mitigation Conditions and Limitations

The system may not properly detect lane markings and the position of your vehicle under certain conditions. Some examples of these conditions are listed below.

Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as an entrance or exit of a tunnel.
- There is little contrast between lane lines and the roadway surface.
- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Driving in the shadows of trees, buildings, etc.
- Shadows of adjacent objects are parallel to lane markings.
- Roadway objects or structures are misinterpreted as lane markers.
- Reflections on the interior of the windshield.
- Driving at night or in a dark condition such as a tunnel.

Roadway conditions

- Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).
- Driving on a road with temporary lane markings.
- Faint, multiple, or varied lane markings are visible on the roadway due to road repairs or deteriorated lane markings.
- The roadway has merging, split, or crossing lines (e.g., such as at an intersection or crosswalk).
- The lane markings are extremely narrow, wide, or changing.
- The vehicle in front of you is driving near the lane lines.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Driving on rough or unpaved roads, or over bumpy surfaces.
- When objects on the road (curb, guard rail, pylons, etc.) are recognized as white (or yellow) lines.
- Driving on roads with double lines.


Vehicle conditions

- Headlight lenses are dirty or the headlights are not properly adjusted.
- The outside of the windshield is streaked or blocked by dirt, mud, leaves, wet snow, etc.
- The inside of the windshield is fogged.
- The camera temperature gets too high.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- The vehicle is tilted due to a heavy load or suspension modifications.
- When tire chains are installed.
- The vehicle is towing a trailer.

Adaptive Cruise Control (ACC) with Low Speed Follow

Helps maintain a constant vehicle speed and a set following-interval behind a vehicle detected ahead of yours and, if the detected vehicle comes to a stop, can decelerate and stop your vehicle, without you having to keep your foot on the brake or the accelerator.

When ACC with Low Speed Follow slows your vehicle by applying the brakes, your vehicle's brake lights will illuminate.

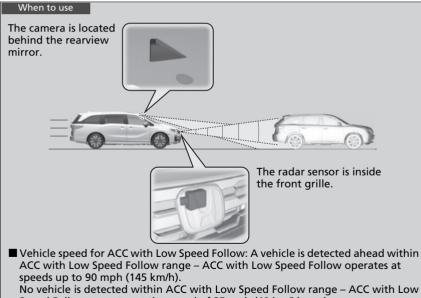

Speed Follow operates at the speed of 25 mph (40 km/h) or above.

Gear positions for adaptive cruise control: In D or S

Madaptive Cruise Control (ACC) with Low Speed Follow


Improper use of ACC with Low Speed Follow can lead to a crash.

Use ACC with Low Speed Follow only when driving on expressways or freeways and in good road and weather conditions.

ACC with Low Speed Follow has limited braking capability and may not stop your vehicle in time to avoid a collision with a vehicle that quickly stops in front of you.

Always be prepared to apply the brake pedal if the conditions require.

How to activate the system

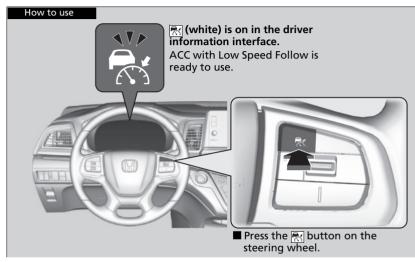

Adaptive Cruise Control (ACC) with Low Speed Follow

Exiting a vehicle that has been stopped while the ACC with Low Speed Follow system is operating can result in the vehicle moving without operator control.


A vehicle that moves without operator control can cause a crash, resulting in serious injury or death.

Never exit a vehicle when the vehicle is stopped by ACC with Low Speed Follow.

Important Reminder

As with any system, there are limits to ACC with Low Speed Follow. Use the brake pedal whenever necessary, and always keep a safe interval between your vehicle and other vehicles.

To Set the Vehicle Speed

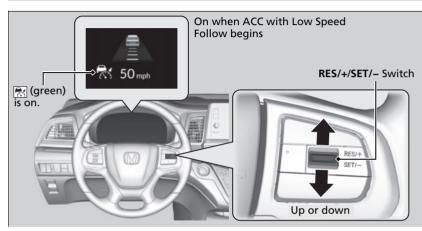

When driving at about 25 mph (40 km/h) or above: Take your foot off the pedal and press the **RES/+/SET/-** switch up or down when you reach the desired speed. The moment you release the switch, the set speed is fixed, and ACC with Low Speed Follow begins.

When you use ACC with Low Speed Follow, Straight Driving Assist (a feature of the Electric Power Steering system) is activated.

By enabling the steering system to automatically compensate for natural steering pull, Straight Driving Assist makes it easier for you to keep your vehicle in a straight line. When driving slower than about 25 mph (40 km/h): If the vehicle is moving and the brake pedal is not depressed, pressing the switch fixes the set speed to about 25 mph (40 km/h) regardless of current vehicle speed. If your vehicle is stationary, you can set the vehicle speed even with the brake pedal depressed.

Maptive Cruise Control (ACC) with Low Speed Follow

For directions on the proper handling of the radar sensor, refer to the following page. **Radar Sensor** P 489

You can read about handling information for the camera equipped with this system.

Front Sensor Camera P 487


The radar sensor for ACC with Low Speed Follow is shared with the Collision Mitigation Braking System[™] (CMBS™)

Collision Mitigation Braking System™ (CMBS[™]) P. 440

ACC with Low Speed Follow may not work properly under certain conditions.

ACC with Low Speed Follow Conditions and Limitations P 463

When not using ACC with Low Speed Follow: Turn off adaptive cruise by pressing the 😹 button.



When ACC with Low Speed Follow starts operating, the vehicle icon, interval bars, and set speed appear on the gauge.

Mathematical Acc and Acc with Low Speed Follow

Do not use ACC with Low Speed Follow under the following conditions:

- On roads with frequent lane change or continuous stop and go traffic, ACC cannot keep an appropriate distance between your vehicle and the vehicle ahead of you.
- On roads with sharp turns.
- On roads with steep downhill sections, as the set vehicle speed can be exceeded by coasting. In such cases, ACC with Low Speed Follow will not apply the brakes to maintain the set speed.
- On roads with toll collection facilities or other objects between lanes of traffic, or in parking areas, or facilities with drive through access.
- On roads with bad weather (rain, fog, snow, etc.), ACC with Low Speed Follow may not detect the distance between your vehicle and the vehicle ahead of you properly.
- On roads with slippery or icy surfaces. The wheels may spin out and your vehicle may lose the control on the condition.

➢To Set the Vehicle Speed

You can switch the displayed set speed measurements on the driver information interface or audio/information screen between mph and km/h.


- Speed/Distance Units P. 121
- Customized Features P. 354


When in Operation

There is a vehicle ahead

ACC with Low Speed Follow monitors if a vehicle ahead of you enters the ACC with Low Speed Follow range. If a vehicle is detected doing so, the ACC with Low Speed Follow system maintains or decelerates your vehicle's set speed in order to keep the vehicle's set following-interval from the vehicle ahead.

Discrete Change Following-interval P. 466

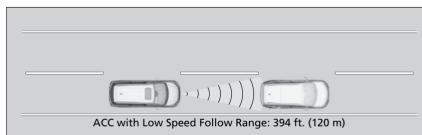




When a vehicle whose speed is slower than your set speed is detected in front of you, your vehicle starts to slow down.

When in Operation

If the vehicle ahead of you slows down abruptly, or if another vehicle cuts in front of you, a beeper sounds, a message appears on the driver information interface.



Depress the brake pedal, and keep an appropriate interval from the vehicle ahead.



There is no vehicle ahead



A vehicle icon with line contour appears on the gauge.

Your vehicle maintains the set speed without having to keep your foot on the brake or accelerator pedal.

If there previously was a vehicle detected ahead that kept your vehicle from traveling at the set speed, ACC with Low Speed Follow accelerates your vehicle to the set speed, and then maintains it.

When you depress the accelerator pedal

You can temporarily increase the vehicle speed. In this case, there is no audible or visual alert even if a vehicle is in the ACC with Low Speed Follow range. ACC with Low Speed Follow stays on unless you cancel it. Once you release the accelerator pedal, the system resumes an appropriate speed for keeping the following-interval while a vehicle ahead is within the ACC with Low Speed Follow range.

When in Operation

Even if the interval between your vehicle and the vehicle detected ahead is short, ACC with Low Speed Follow may start accelerating your vehicle under the following circumstances:

- The vehicle ahead of you is going at almost the same speed as, or faster than, your vehicle.
- A vehicle that cuts in front of you is going faster than your vehicle, gradually increasing the interval between the vehicles.

You can also set the system to beep when a vehicle detected in front of you comes in and goes out of the ACC with Low Speed Follow detecting range. A vehicle detect beep on and off can be selected.

Customized Features P. 354

Limitations

You may need to use the brake to maintain a safe interval when using ACC with Low Speed Follow. Additionally, ACC with Low Speed Follow may not work properly under certain conditions.

ACC with Low Speed Follow Conditions and Limitations P. 463

■ A vehicle detected ahead is within ACC with Low Speed Follow range and slows to a stop



Stopped

😹 (green)

Your vehicle also stops, automatically. The **Stopped** message appears on the gauge. When the vehicle ahead of you starts again, if you press the **RES/+/SET/–** switch up or down, or depress the accelerator pedal, ACC with Low Speed Follow operates again within the prior set speed.

If no vehicle is ahead of you before you resume driving, depressing the accelerator pedal will resume operation of ACC with Low Speed Follow within the prior set speed.

ACC with Low Speed Follow Conditions and Limitations

The system may automatically shut off under certain conditions. Some examples of these conditions are listed below. Other conditions may reduce some of the ACC functions.

Front Sensor Camera P. 487
Radar Sensor P. 489

Environmental conditions

Driving in bad weather (rain, fog, snow, etc.).

Roadway conditions

Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).

Vehicle conditions

- The outside of the windshield is blocked by dirt, mud, leaves, wet snow, etc.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- The camera temperature gets too high.
- The parking brake is applied.
- The front grille is dirty.
- The vehicle is tilted due to a heavy load or suspension modifications.
- Tire chains are installed.
- The vehicle is towing a trailer.


MACC with Low Speed Follow Conditions and Limitations

If you need the radar sensor to be repaired, or removed, or the radar sensor cover is strongly impacted, turn off the system by pressing the key button and take your vehicle to a dealer.

Have your vehicle checked by a dealer if you find any unusual behavior of the system (e.g., the warning message appears too frequently).

Detection limitations

- A vehicle suddenly crosses in front of you.
- The interval between your vehicle and the vehicle ahead of you is too short.
- A vehicle cuts in front of you at a slow speed, and it brakes suddenly.
- You accelerate rapidly and approach the vehicle ahead of you at high speed.
- The vehicle ahead of you is a motorcycle, bicycle, mobility scooter, or other small vehicle.
- There are animals in front of your vehicle.
- You drive on a curved or winding or undulating road that makes it difficult for the sensor to properly detect a vehicle in front of you.

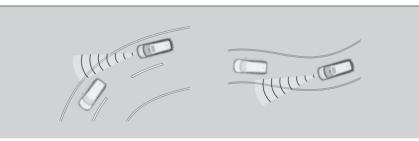


- A vehicle ahead of you stops and the speed difference between your vehicle and the vehicle ahead of you is significantly large.
- An oncoming vehicle suddenly comes in front of you.
- Your vehicle abruptly crosses over in front of an oncoming vehicle.

• Driving through a narrow metal bridge.




- The vehicle ahead of you brakes suddenly.
- The vehicle ahead of you has a unique shape.

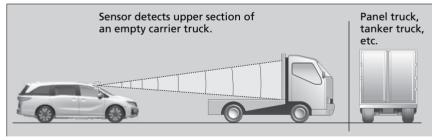

• Your vehicle or the vehicle ahead of you is driving on one edge of the lane.


To Adjust the Vehicle Speed

Increase or decrease the vehicle speed using the **RES/+/SET/–** switch on the steering wheel.

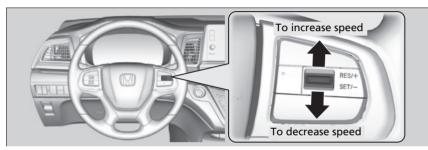

- Each time you press the **RES/+/SET/–** switch up or down, the vehicle speed is increased or decreased by about 1 mph or 1 km/h accordingly.
- If you keep the **RES/+/SET/–** switch pressed up or down, the vehicle speed increases or decreases by about 5 mph or 5 km/h accordingly.

To Set or Change Following-interval



Press the interval button to change the ACC with Low Speed Follow following-interval. Each time you press the button, the following-interval (the interval behind a vehicle detected ahead of you) setting cycles through short, middle, long, and extra long following-intervals.

➢To Adjust the Vehicle Speed

If a vehicle detected ahead is going at a speed slower than your increased set speed, ACC with Low Speed Follow may not accelerate your vehicle. This is to maintain the set interval between your vehicle and the vehicle ahead.

When you depress the accelerator pedal and then press down and release the **RES/+/SET/–** switch, the current speed of the vehicle is set.

Determine the most appropriate following-interval setting based on your specific driving conditions. Be sure to adhere to any following-interval requirements set by local regulation.

The higher your vehicle's following-speed is, the longer the short, middle, long or extra long following-interval becomes. See the following examples for your reference.

Vehicle Interval		When the Set Speed is:		
		50 mph (80 km/h)	65 mph (104 km/h)	
Short		83 feet 25 meters 1.1 sec	100 feet 31 meters 1.1 sec	
Middle		110 feet 33 meters 1.5 sec	137 feet 42 meters 1.5 sec	
Long		154 feet 47 meters 2.1 sec	200 feet 61 meters 2.1 sec	
Extra Long		204 feet 62 meters 2.8 sec	265 feet 81 meters 2.8 sec	

When your vehicle stops automatically because a vehicle detected ahead of you has stopped, the interval between the two vehicles will vary based on the ACC with Low Speed Follow interval setting.

To Cancel



To cancel ACC with Low Speed Follow, do any of the following:

- Press the **CANCEL** button.
 - ► The 🛃 indicator (green) on the gauge changes to the 🛃 indicator (white).
- Press the button.
 indicator (green) goes off.
- Depress the brake pedal while the vehicle is moving forward.
 - ► The 😹 indicator (green) on the gauge changes to the 🛃 indicator (white).

≫To Cancel

Resuming the prior set speed: After you have canceled ACC with Low Speed Follow, you can activate the ACC with Low Speed Follow by pressing the **RES/+/SET/–** switch up to resume the prior set speed even if the vehicle is stopped.

If the Refinition (white) is displayed but no prior set speed has been set, pressing the **RES/+/SET/-** switch up will set the speed to your vehicle's current speed.

The set speed cannot be set or resumed when ACC with Low Speed Follow has been turned off using the system. Press the system the desired speed.

Automatic cancellation

The beeper sounds and a message appears on the driver information interface when ACC with Low Speed Follow is automatically canceled. Any of these conditions may cause the ACC with Low Speed Follow to automatically cancel:

- Bad weather (rain, fog, snow, etc.).
- When the radar sensor behind the Honda emblem gets dirty.
- The vehicle ahead of you cannot be detected.
- An abnormal tire condition is detected, or the tires are skidding.
- Driving on a mountainous road for extended periods, or driving off road.
- Abrupt steering wheel movement.
- When the ABS, VSA[®], or CMBS[™] is activated.
- When the ABS or VSA® system indicator comes on.
- When the vehicle is stopped on a very steep slope.
- When you manually apply the parking brake.
- When the detected vehicle within the ACC with Low Speed Follow range is too close to your vehicle.
- When accelerating rapidly.
- The camera behind the rearview mirror, or the area around the camera, including the windshield, gets dirty.
- When the Maximum Load Limit is exceeded.
- When passing through an enclosed space, such as tunnel.

When the parking brake and brake system indicator (amber) comes on.

The ACC with Low Speed Follow automatic cancellation can be also triggered by the following causes. In these cases, the parking brake will be automatically applied.

- The driver's seat belt is unfastened when the vehicle is stationary.
- The vehicle stops for more than 10 minutes.
- The engine is turned off.


In the following cases, a buzzer sounds, ACC with Low Speed Follow is deactivated, and the **Cruise canceled: System not available** message appears in the driver information interface.

• The vehicle has repeatedly applied the brakes to maintain the set speed (for example, you are descending a long slope).

Automatic cancellation

Even though ACC with Low Speed Follow has been automatically canceled, you can still resume the prior set speed. Wait until the condition that caused ACC with Low Speed Follow to cancel improves, then press the **RES/+/SET/–** switch up or down.

To Switch ACC with Low Speed Follow to Cruise Control



Press and hold the interval button for one second. **Cruise mode selected** appears on the driver information interface for two seconds, and then the mode switches to Cruise.

To switch back to ACC with Low Speed Follow, press and hold the interval button again for one second. **ACC mode selected** appears on the driver information interface for two seconds.

To Switch ACC with Low Speed Follow to Cruise Control

Always be aware which mode you are in. When you are driving in Cruise mode, the system will not assist you to maintain a following-interval from a vehicle ahead of you.

You can switch the displayed set speed measurements on the driver information interface or audio/information screen between mph and km/h.

Speed/Distance Units P. 121
 Customized Features P. 354

To Set the Vehicle Speed

Take your foot off the pedal and press the **RES/+/SET/–** switch up or down when you reach the desired speed.

The moment you release the **RES/+/SET/–** switch, the set speed is fixed, and cruise control begins. The color of [si] indicator changes from white to green.

When you use cruise control, Straight Driving Assist (a feature of the Electric Power Steering system) is activated.

By enabling the steering system to automatically compensate for natural steering pull, Straight Driving Assist makes it easier for you to keep your vehicle in a straight line.

When to use

Desired speed in a range above roughly 25 mph (40 km/h).

To Adjust the Vehicle Speed

- Each time you press the **RES/+/SET/–** switch up or down, the vehicle speed is increased or decreased by about 1 mph or 1 km/h accordingly.
- If you keep the **RES/+/SET/–** switch pressed up or down, the vehicle speed increases or decreases by about 5 mph or 5 km/h accordingly.

To Cancel

To cancel cruise control, do any of the following:

- Press the **CANCEL** button.
 - ▶ The 🗑 indicator (green) on the gauge change to the 🕅 indicator (white.)
- Press the 😹 button.
 - ▶ 💮 indicator (green) goes off.
- Depress the brake pedal.

▶ The 🕅 indicator (green) on the gauge change to the 🕅 indicator (white.)

≫To Cancel

Resuming the prior set speed: After cruise control has been canceled, you can still resume the prior set speed by pressing the **RES/+/SET/–** switch up while driving at a speed of at least 25 mph (40 km/h) or more.

You cannot set or resume in the following situations:

- When vehicle speed is less than 25 mph (40 km/h).
- When the 🛃 button is turned off.


At vehicle speeds of 22 mph (35 km/h) or less, cruise control canceled automatically.

Lane Keeping Assist System (LKAS)

Provides steering input to help keep the vehicle in the middle of a detected lane and provides tactile and visual alerts if the vehicle is detected drifting out of its lane.

Steering input assist

The system applies torque to the steering to keep the vehicle between the left and right lane lines. The applied torque becomes stronger as the vehicle gets closer to either of the lane lines.

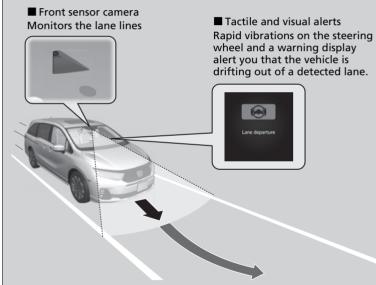

When you operate the turn signals to change lanes, the system is suspended, and resumes after the signals are off.

If you make a lane change without operating the turn signals, the LKAS alerts activate, and torque is applied to the steering.

➢Lane Keeping Assist System (LKAS)

Important Safety Reminders

The LKAS is for your convenience only. It is not an autonomous driving system and always requires driver attention and control. The system does not work if you take your hands off the steering wheel or fail to steer the vehicle.

The LKAS is convenient when it is used on expressways or freeways.

Do not place objects on the instrument panel. Objects may reflect on the windshield and prevent correct detection of the traffic lanes.

The LKAS only alerts you when lane drift is detected without a turn signal in use. The LKAS may not detect all lane markings or lane departures; accuracy will vary based on weather, speed, and lane marker condition. It is always your responsibility to safely operate the vehicle and avoid collisions.

The LKAS may not work properly or may work improperly under the certain conditions:

LKAS Conditions and Limitations P. 479


You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 487

The LKAS may not function as designed while driving in frequent stop and go traffic, or on roads with sharp curves.

Lane Keep Support Function

Provides assistance to keep the vehicle in the center of the lane. When the vehicle nears a white or yellow line, steering force of the electric power steering will become stronger.

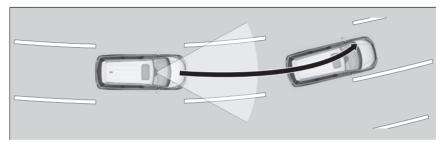


≥Lane Keeping Assist System (LKAS)

When it fails to detect lanes, the system will temporarily be canceled. When lane is detected, the system will recover automatically.

Lane Departure Warning Function

When the vehicle enters the warning area, the LKAS alerts you with slight steering wheel vibration as well as a warning display.

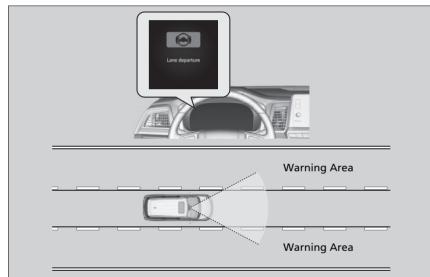


When the System can be Used

The system can be used when the following conditions are met.

- The lane in which you are driving has detectable lane markers on both sides, and your vehicle is in the center of the lane.
- The vehicle is traveling between about 45 and 90 mph (72 and 145 km/h).
- You are driving on a straight or slightly curved road.
- The turn signals are off.
- The brake pedal is not depressed.
- The wipers are not in high speed operation.

How to activate the system




- **1.** Press the LKAS button.
- LKAS indicator (white) appears on the gauge.
 The system is activated.

■Lane Keeping Assist System (LKAS)

If the vehicle drifts toward either left or right lane line due to the system applying torque, turn off the LKAS and have your vehicle checked by a dealer.

If LKAS button is pressed when the system can be used, LKAS is on without standby.



- **2.** Keep your vehicle near the center of the lane while driving.
 - The LKAS indicator changes from white to green, and green lines appear once the system starts operating after detecting the left and right lane markings.

To Cancel



Press the LKAS button.

The LKAS is turned off every time you stop the engine, even if you turned it on the last time you drove the vehicle.

LKAS indicator (white)

When the LKAS is suspended, green lines on the gauge disappear, and the beeper sounds (if activated).

The system operation is suspended if you:

- Set the wipers to high speed.
 - Turning the wipers off, setting it to LO, or the wipers are operating intermittently resumes the LKAS.
- Decrease the vehicle speed to about 40 mph (64 km/h) or less.
 - Increasing the vehicle speed to about 45 mph (72 km/h) or more resumes the LKAS.
- Depress the brake pedal.
 - The LKAS resumes and starts detecting the lane lines again once you release the brake pedal.
- Your vehicle is driving to the right or the left of the lane.

The system operation is suspended if you:

The LKAS may be automatically suspended when:

- The system fails to detect lane lines.
- The steering wheel is turned quickly.
- You fail to steer the vehicle.
- Driving through a sharp curve.
- Driving at a speed in excess of approximately 94 mph (150 km/h).
- The ABS or VSA[®] system engages.

Once these conditions no longer exist, the LKAS automatically resumes.

The LKAS may be automatically canceled when:

- The camera temperature gets extremely high or low.
- The camera behind the rearview mirror, or the area around the camera, including the windshield, gets dirty.

The beeper sounds if the LKAS is automatically canceled.

LKAS Conditions and Limitations


The system may not detect lane markings and therefore may not keep the vehicle in the middle of the lane under certain conditions, including the following:

Environmental conditions

- Driving in bad weather (rain, fog, snow, etc.).
- Sudden changes between light and dark, such as an entrance or exit of a tunnel.
- There is little contrast between lane lines and the roadway surface.
- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Driving in the shadows of trees, buildings, etc.
- Shadows of adjacent objects are parallel to lane markings.
- Roadway objects or structures are misinterpreted as lane markers.
- Reflections on the interior of the windshield.
- Driving at night or in a dark condition such as a tunnel.

Roadway conditions

- Driving on a snowy or wet roadway (obscured lane marking, vehicle tracks, reflected lights, road spray, high contrast).
- Driving on a road with temporary lane markings.
- Faint, multiple, or varied lane markings are visible on the roadway due to road repairs or deteriorated lane markings.

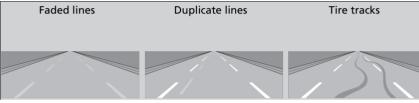


- The roadway has merging, split, or crossing lines (e.g., such as at an intersection or crosswalk).
- The lane markings are extremely narrow, wide, or changing.

Very wide or narrow traffic lane



- The vehicle in front of you is driving near the lane lines.
- The road is hilly or the vehicle is approaching the crest of a hill.
- Driving on rough or unpaved roads, or over bumpy surfaces.
- When objects on the road (curb, guard rail, pylons, etc.) are recognized as white (or yellow) lines.
- Driving on roads with double lines.



Vehicle conditions

- Headlight lenses are dirty or the headlights are not properly adjusted.
- The outside of the windshield is streaked or blocked by dirt, mud, leaves, wet snow, etc.
- The camera temperature gets too high.
- The inside of the windshield is fogged.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- The vehicle is tilted due to a heavy load or suspension modifications.
- The vehicle is towing a trailer.

Traffic Sign Recognition System

Reminds you of speed limit sign your vehicle has just passed through, showing it on the gauge.

How the System Works

When the camera located behind the rearview mirror captures traffic signs while driving, the system displays the ones that are recognized as designated for your vehicle. The sign icon will be displayed until the vehicle reaches a predetermined time and distance.

If the system does not detect any traffic signs while you are driving, the sign icon will not be displayed.



The sign icon also may switch to another one, or disappear when:

- The other designated limit is detected.
- You make a turn with a turn signal at an intersection.

➢Traffic Sign Recognition System

Not all signs may be displayed, but any signs posted on roadsides should not be ignored. The system does not work on the designated traffic signs of all the countries you travel, nor in all situations. Do not rely too much on the system. Always drive at speeds appropriate for the road conditions.

Never apply a film or attach any objects to the windshield that could obstruct the camera's field of vision and cause the system to operate abnormally. Scratches, nicks, and other damage to the windshield within the camera's field of vision can cause the system to operate abnormally. If this occurs, we recommend that you replace the windshield with a genuine Honda replacement windshield. Making even minor repairs within the camera's field of vision or installing an aftermarket replacement windshield may also cause the system to operate abnormally. After replacing the windshield, have a dealer recalibrate the camera. Proper calibration of the camera is necessary for the system to operate properly.

To help reduce the likelihood that high interior temperatures will cause the camera's sensing system to shut off, find a shady area or face the front of the vehicle away from the sun when parking. If you use a reflective sun shade, do not allow it to cover the camera housing. Covering the camera can concentrate heat on it.

You can read about handling information for the camera equipped with this system.

Front Sensor Camera P. 487

➢Traffic Sign Recognition System

You can turn the Traffic Sign Recognition System on and off.

Customized Features P. 354

The unit for speed limits (mph or km/h) varies from country to country. Just after entering a country whose unit differs to the one of the country from which you came, the Traffic Sign Recognition System may not work correctly.

Speed/Distance Units P. 121
 Customized Features P. 354

Traffic Sign Recognition System Conditions and Limitations

The traffic sign recognition system may not be able to recognize a traffic sign in the following cases.

Vehicle conditions

- Headlight lenses are dirty or the headlights are not properly adjusted.
- The outside of the windshield is blocked by dirt, mud, leaves, wet snow, etc.
- The inside of the windshield is fogged.
- There are portions remaining to be wiped.
- An abnormal tire or wheel condition (incorrect sizes, varied sizes or construction, improperly inflated, compact spare tire, etc.).
- The vehicle is tilted due to a heavy load or suspension modifications.

Environmental conditions

- Driving into low sunlight (e.g., at dawn or dusk).
- Strong light is reflected onto the roadway.
- Sudden changes between light and dark, such as an entrance or exit of a tunnel.
- When you drive in the shadows of trees, buildings, etc.
- Driving at night, in dark areas such as long tunnels.
- Driving in bad weather (rain, fog, snow, etc.).
- A vehicle in front of you is kicking up spray or snow.

Traffic Sign Recognition System Conditions and Limitations

When the traffic sign recognition system malfunctions, random appears on the driver information interface. If this message does not disappear, have your vehicle checked by a dealer.



The position or the condition of the traffic sign

- A sign is hard to be found since it is in a complicated area.
- A sign is located far away from your vehicle.
- A sign is located where the beam of the headlight is hard to reach.
- A sign is on a corner or bend in the road.
- Faded or bent signs.
- Rotated or damaged signs.
- A sign is covered with mud, snow, or frost.
- A part of the sign is hidden by the trees, or the sign itself is hidden by a vehicle and others.
- Light (a streetlight) or a shadow is reflected on the surface of the sign.
- A sign is too bright or too dark (an electric sign).
- A sign of a small size.

Other conditions


• When you are driving at a high speed.

The traffic sign recognition system may not operate correctly, such as displaying a sign that does not follow the actual regulation for the roadway or does not exist at all in the following cases.

- A speed limit sign may display at a higher or lower speed than the actual speed limit.
- There is a supplementary sign with further information such as weather, time, vehicle type, school zone, etc.
- Figures on the sign are hard to read (electric signs, numbers on the sign are blurred, etc.).
- The sign is in the vicinity of the lane you are driving in, even though it is not for the lane, such as a speed limit sign situated at an exit or an intersection between the side road and the main road.
- There are things that look similar to the color or shape of the recognition object (similar sign, electric sign, signboard, structure, etc.).
- A truck or another large vehicle with a sticker of the speed limit sign on the back is traveling in front of you.

Signs Displayed on the Driver information interface


The speed limit sign icon is displayed on the gauge.

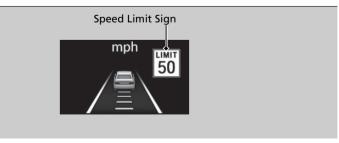

Front Sensor Camera

The camera, used in systems such as Collision Mitigation Braking System[™] (CMBS[™]), Road Departure Mitigation, Adaptive Cruise Control (ACC) with Low Speed Follow, Lane Keeping Assist System (LKAS), Traffic Sign Recognition System, and Auto High-Beam, is designed to detect an object that triggers any of the systems to operate its functions.

Camera Location and Handling Tips



This camera is located behind the rearview mirror.

To help reduce the likelihood that high interior temperatures will cause the camera's sensing system to shut off, find a shady area or face the front of the vehicle away from the sun when parking. If you use a reflective sun shade, do not allow it to cover the camera housing. Covering the camera can concentrate heat on it.

➢Front Sensor Camera

Never apply a film or attach any objects to the windshield, the hood, or the front grille that could obstruct the camera's field of vision and cause the system to operate abnormally.

Scratches, nicks, and other damage to the windshield within the camera's field of vision can cause the system to operate abnormally. If this occurs, we recommend that you replace the windshield with a genuine Honda replacement windshield. Making even minor repairs within the camera's field of vision or installing an aftermarket replacement windshield may also cause the system to operate abnormally. After replacing the windshield, have a dealer recalibrate the camera. Proper calibration of the camera is necessary for the system to operate properly.

Do not place an object on the top of the instrument panel. It may reflect onto the windshield and prevent the system from detecting lane lines properly.

➢Front Sensor Camera


If the **Some driver assist systems cannot operate: Camera temperature too high** message appears:

- Use the climate control system to cool down the interior and, if necessary, also use defroster mode with the airflow directed toward the camera.
- Start driving the vehicle to lower the windshield temperature, which cools down the area around the camera.

If the Some driver assist systems cannot operate: Clean front windshield or poor viewing condition. message appears:

• Park your vehicle in a safe place, and make sure the windshield is clean. Clean the windshield if it is dirty. If the message does not disappear after driven for a while, have your vehicle checked by a dealer.

Radar Sensor



The radar sensor is behind the Honda emblem on the front grille.

■Radar Sensor

For the system to work properly, observe the following precautions.

- Always keep the emblem and front grille clean.
- Never use chemical solvents or polishing powder for cleaning the emblem and front grille. Clean it with water or a mild detergent.
- Do not put any stickers or paint on the emblem or front grille.
- Do not scratch or damage the emblem or front grille.
- Do not replace the emblem, front grille, or bumper.
- Do not remove or disassemble the radar sensor.

Consult a dealer if:

- The radar sensor cover is strongly impacted.
- The front grille or bumper needs to be repaired.

If the vehicle is involved in any of the following situations, the radar sensor may not work properly. Have your vehicle checked by a dealer:

- Your vehicle is involved in a frontal collision.
- Your vehicle drives through deep water or is submerged in deep water.
- Your vehicle strongly strikes a bump, curb, chock, slope, or embankment that could jar the radar sensor.

Braking

Brake System

Parking Brake

Use the parking brake to keep the vehicle stationary when parked. When the parking brake is applied, you can manually or automatically release it.



To apply

The electric parking brake can be applied any time the vehicle has battery, no matter which position the power mode is in. Press the electric parking brake switch gently and securely.

► The parking brake and brake system indicator (red) comes on.

■Brake System

When you depress the brake pedal, you may hear a whirring sound from the engine compartment. This is because the brake system is in operation, and it is normal.

➢Parking Brake

You may hear the electric parking brake system motor operating from the rear wheel area when you apply or release the parking brake. This is normal.

The brake pedal may slightly move due to the electric parking brake system operation when you apply or release the parking brake. This is normal.

You cannot apply or release the parking brake if the battery goes dead.

If the Battery Is Dead P. 587

If you press and hold the electric parking brake switch while driving, the brakes on all four wheels are applied by the electric servo brake system until the vehicle comes to a stop. The electric parking brake then applies, and the switch should be released.



To release

The power mode must be in ON in order to release the electric parking brake.

- **1.** Depress the brake pedal.
- **2.** Press the electric parking brake switch.
 - The parking brake and brake system indicator (red) goes off.

Manually releasing the parking brake using the switch helps your vehicle start slowly and smoothly when facing downhill on steep hills.


■Parking Brake

In the following situations, the parking brake automatically operates.

- When the vehicle stops more than 10 minutes while ACC with Low Speed Follow is activated.
- When the driver's seat belt is unfastened while your vehicle is stopped automatically by ACC with Low Speed Follow.
- When the engine is turned off, except by Auto Idle Stop system, while ACC with Low Speed Follow is activated.
- When the vehicle stops with the automatic brake hold system activated for more than 10 minutes.
- When the driver's seat belt is unfastened while your vehicle is stopped and brake hold is applied.
- When the engine is turned off, except by Auto Idle Stop system, while brake hold system is applied.
- When there is a problem with the brake hold system while brake hold is applied.

To release automatically

Depressing the accelerator pedal releases the parking brake. Use the accelerator pedal to release the brake when you are starting the vehicle facing uphill, or in a traffic jam.



Gently depress the accelerator pedal. When on a hill, it may require more accelerator input to release.

The parking brake and brake system indicator (red) goes off.

You can release the parking brake automatically when:

- You are wearing the driver's seat belt.
- The engine is running.
- The transmission is not in **P** or **N**.

➢Parking Brake

If the parking brake cannot be released automatically, release it manually.

When the vehicle is traveling uphill, the accelerator pedal may need to be pressed farther to automatically release the electric parking brake.

The parking brake cannot be released automatically while the following indicators are on:

- Malfunction indicator lamp
- Transmission system indicator

The parking brake may not be released automatically while the following indicators are on:

- Parking brake and brake system indicator (amber)
- VSA[®] system indicator
- ABS indicator
- Supplemental restraint system indicator

Foot Brake

Your vehicle is equipped with disc brakes at all four wheels. The brake assist system increases the stopping force when you depress the brake pedal hard in an emergency situation. The anti-lock brake system (ABS) helps you retain steering control when braking very hard.

Brake Assist System P. 498

Anti-lock Brake System (ABS) P. 497

≫Foot Brake

Check the brakes after driving through deep water, or if there is a buildup of road surface water. If necessary, dry the brakes by lightly depressing the pedal several times.

If you hear a continuous metallic friction sound when applying the brakes, this is caused by the brake wear indicator rubbing on the brake rotor and indicates that the brake pads need to be replaced. Have your vehicle checked by a dealer. If you hear only an occasional squeak or squeal when you initially apply the brake pedal, this may be normal and caused by high frequency vibration of the brake pads against the rotating brake disc.

Constantly using the brake pedal while going down a long hill builds up heat, which reduces the brake effectiveness. Apply engine braking by taking your foot off the accelerator pedal and downshifting to a lower gear.

Do not rest your foot on the brake pedal while driving, as it will lightly apply the brakes and cause them to lose effectiveness over time and reduce pad life. It will also confuse drivers behind you.

Whenever the brakes are activated by CMBSTM or another system that automatically controls braking, the brake pedal is depressed and released in accordance with braking function.


Automatic Brake Hold

Keeps the brake applied after releasing the brake pedal until the accelerator pedal is pressed. You can use this system while the vehicle is temporarily stopped, like at traffic lights and in heavy traffic.

Turning on the system



Activating the system

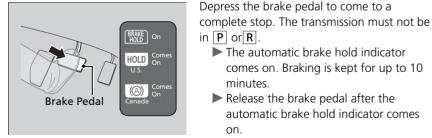

Fasten your seat belt properly, then start the engine. Press the automatic brake hold button

The automatic brake hold system indicator comes on. The system is turned on

► The automatic brake hold indicator

Release the brake pedal after the

minutes.

on.

comes on. Braking is kept for up to 10

automatic brake hold indicator comes

Automatic Brake Hold

Activating the automatic brake hold system on steep hills or slippery roads may still allow the vehicle to move if you remove your foot from the brake pedal.

If a vehicle unexpectedly moves, it may cause a crash resulting in serious injury or death.

Never activate the automatic brake hold system or rely on it to keep a vehicle from moving when stopped on a steep hill or slippery roads.


Using the automatic brake hold system to park the vehicle may result in the vehicle unexpectedly moving.

If a vehicle moves unexpectedly, it may cause a crash, resulting in serious injury or death.

Never leave the vehicle when braking is temporarily kept by automatic brake hold and always park the vehicle by putting the transmission in P and applying the parking brake

Driving

Canceling the system



Depress the accelerator pedal while the transmission is in a position other than $[\mathbf{P}]$ or $[\mathbf{N}]$. The system is canceled and the vehicle starts to move.

The automatic brake hold indicator goes off. The system continues to be on.

Mutomatic Brake Hold

When using the automatic brake hold, keep your foot on the brake pedal until the automatic brake hold indicator comes on.

If the vehicle unexpectedly moves, it may cause a crash resulting in serious injury or death.

Release your foot from the brake pedal after the automatic brake hold indicator comes on.

■ The system automatically cancels when:

- You engage the parking brake.
- You depress the brake pedal and put the transmission into [P] or [R].

The system automatically cancels and the parking brake is applied when:

- Braking is kept for more than 10 minutes.
- The driver's seat belt is unfastened.
- The engine is turned off.
- There is a problem with automatic brake hold system.


While the system is activated, you can turn off the engine or park the vehicle through the same procedure as you normally do.

When Stopped P. 499

Whether the system is on, or the system is activated, the automatic brake hold turns off once the engine is off.

You may hear an operating noise if the vehicle moves while the automatic brake hold system is in operation.

Turning off the automatic brake hold system



Only the automatic brake hold system indicator comes on:

Press the automatic brake hold button.
 The automatic brake hold system indicator goes off.

When the automatic brake hold indicator comes on at the same time:

- Press the automatic brake hold button with the brake pedal depressed.
 - The automatic brake hold system indicator and the automatic brake hold indicator go off.

Turning off the automatic brake hold system

Make sure to turn off the automatic brake hold system before using an automated car wash.

Anti-lock Brake System (ABS)

Helps prevent the wheels from locking up, and helps you retain steering control by pumping the brakes rapidly, much faster than you can.

The electronic brake distribution (EBD) system, which is part of the ABS, also balances the front-to-rear braking distribution according to vehicle loading.

You should never pump the brake pedal. Let the ABS work for you by always keeping firm, steady pressure on the brake pedal. This is sometimes referred to as "stomp and steer."

■ ABS operation

The brake pedal may pulsate slightly when the ABS is working. Depress the brake pedal and keep holding the pedal firmly down. On dry pavement, you will need to press on the brake pedal very hard before the ABS activates. However, you may feel the ABS activate immediately if you are trying to stop on snow or ice.

ABS may activate when you depress the brake pedal when driving on:

- Wet or snow covered roads.
- Roads paved with stone.
- Roads with uneven surfaces, such as potholes, cracks, manholes, etc.

When the vehicle speed goes under 6 mph (10 km/h), the ABS stops.

Manti-lock Brake System (ABS)

NOTICE

The ABS may not function correctly if you use a tire of the incorrect size or type.

If the **ABS** indicator comes on while driving, there may be a problem with the system. While normal braking will not be affected, there is a possibility that the ABS will not be operating. Have your vehicle checked by a dealer immediately.

The ABS is not designed for the purpose of reducing the time or distance it takes for a vehicle to stop: It is designed to limit brake lockup which can lead to skidding and loss of steering control.

In the following cases, your vehicle may need more distance to stop than a vehicle without the ABS:

- You are driving on rough or uneven road surfaces, such as gravel or snow.
- The tires are equipped with snow chains.

The following may be observed with the ABS system:

- Motor sounds coming from the engine compartment when the brakes are applied, or when system checks are being performed after the engine has been started and while the vehicle accelerates.
- Brake pedal and/or the vehicle body vibration when ABS activates.

These vibrations and sounds are normal to ABS systems and are no cause for concern.

Brake Assist System

Designed to assist the driver by generating greater braking force when you depress the brake pedal hard during emergency braking.

Brake assist system operation

Press the brake pedal firmly for more powerful braking.

When brake assist operates, the pedal may wiggle slightly and an operating noise may be heard. This is normal. Keep holding the brake pedal firmly down.

When Stopped

- **1.** Depress the brake pedal firmly and come to a complete stop.
- **2.** With the brake pedal depressed, press the electric parking brake switch slowly, but fully.
- **3.** Change the shift position to **P**.
 - ▶ Do not release the brake pedal until you have confirmed that **P** is shown on the shift position indicator.
- 4. Turn off the engine.
 - ► The parking brake and brake system indicator (red) goes off in about 15 seconds.

Always set the parking brake, especially if you are parked on an incline.

≥When Stopped

The vehicle can roll away if left unattended without confirming that Park is engaged.

A vehicle that rolls away could cause a crash resulting in serious injury or death.

Always keep your foot on the brake pedal until you have confirmed that \underline{P} is shown on the gear position Indicator.

NOTICE

The following can damage the transmission:

- Depressing the accelerator and brake pedals simultaneously.
- Holding the vehicle in place when facing uphill by depressing the accelerator pedal.
- Changing into **P** before the vehicle stops completely.

Do not park your vehicle near flammable objects, such as dry grass, oil, or timber. Heat from the exhaust can cause a fire.


In extremely cold temperatures, the parking brake may freeze up if applied. If such temperatures are expected, do not apply the parking brake but, if parking on a slope, either turn the front wheels so they will contact the curb if the vehicle rolls down the slope or block the wheels to keep the vehicle from moving. If you do not take either precaution, the vehicle may roll unexpectedly, leading to a crash.

Parking Sensor System*

The corner and center sensors monitor obstacles around your vehicle, and the beeper and the driver information interface, and audio/information screen let you know the approximate distance between your vehicle and the obstacle.

Front Center Sensors

The Sensor Location and Range





Front: Within about 22 in (55 cm) Rear: Within about 23 in (60 cm)

Front: Within about 25 in (65 cm) or less

Rear Center Sensors

Rear: Within about 43 in (110 cm) or less

Parking Sensor System *

Even when the system is on, always confirm if there is no obstacle near your vehicle before parking.

The system may not work properly when:

- The sensors are covered with snow, ice, mud, or dirt.
- The vehicle has been out in hot or cold weather.
- There is something nearby that emits ultrasonic waves or high frequency sounds.
- Driving in bad weather (rain, fog, snow, etc.).

The system may not detect these obstacles:

- Thin or low objects.
- Sonic-absorptive materials, such as snow, cotton, or sponge.
- Objects directly under the bumper.

The system may falsely detect obstacles in the following situations:

- The vehicle is on uneven surface, such as grass, bumps, or a hill.
- When close to other vehicles with sonar sensors or other objects that emit ultrasonic waves.
- There is splashing water near the sensors due to heavy rains, etc.

Do not put any accessories on or around the sensors. ►If you put any accessories (such as a towing hitch or bicycle rack) on or around the rear sensors, the system may activate if it detects these accessories as an obstacle. In this case, turn off the rear sensor. ► Turning off All Rear Sensors P. 504

Parking Sensor System On and Off



With the power mode in ON, press the parking sensor system button to turn on or off the system. The indicator in the button comes on when the system is on.


The front corner, rear corner and rear center sensors start to detect an obstacle when the transmission is in $[\mathbf{R}]$, and the vehicle speed is less than 5 mph (8 km/h).

The front center and front corner sensors start to detect an obstacle when the transmission is in any position other than [P] or [R], and the vehicle speed is less than 5 mph (8 km/h).

≥Parking Sensor System On and Off

When you set the power mode to ON, the system will be in the previously selected condition.

Screen Operation

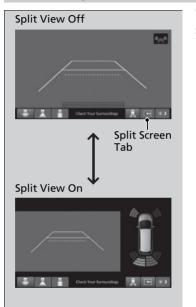

You can switch between split view off and split view on by touching the split screen tab.

When the Distance Between Your Vehicle and Obstacles Becomes Shorter

Interval between beeps	Distance between the Bumper and Obstacle			Driver Information	Audio/information
	Corner Sensors	Center Sensors	Indicator	Interface	screen
Moderate	—	Front: About 25-22 in (65-55 cm) Rear: About 43-23 in (110-60 cm)	Comes on*1/ Blinks*2 in Yellow*3	Warning: Approaching object Indicators light up where the sensor detects an obstacle	Indicators light up where the sensor detects an obstacle Indicators light up where the sensor detects an obstacle
Short	Front: About 22-18 in (55-45 cm) Rear: About 23-18 in (60-45 cm)	Front: About 22-18 in (55-45 cm) Rear: About 23-18 in (60-45 cm)	Comes on*1/ Blinks*2 in Amber		
Very short	About 18-14 in (45-35 cm)	About 18-14 in (45-35 cm)			
Continuous	About 14 in (35 cm) or less	About 14 in (35 cm) or less	Comes on*1/ Blinks ^{*2} in Red		

*1: On the driver information interface

*2: On the audio/information screen

*3: At this stage, only the center sensors detect obstacles.

Driving

Turning off All Rear Sensors

To deactivate the rear sensors, please take the following steps:

- 1. Make sure that the parking sensor system is not activated.
 - ► The indicator in the button turns off.
- 2. Set the power mode to VEHICLE OFF.
- 3. Press and hold the parking sensor system button, and set the power mode to ON.
- **4.** Keep pressing the button for 10 seconds. Release the button when the indicator in the button flashes.
 - The beeper sounds once.
- **5.** While the indicator is flashing, press the button again. The indicator in the button turns off.
 - ▶ The beeper sounds twice. The rear sensors are now turned off. They will remain turned off until manually turned back on again.

To turn the rear sensors on again, follow the above procedure. The beeper sounds three times when the rear sensors come back on.

➢Turning off All Rear Sensors

When you set the gear position to $[\underline{\mathbf{R}}]$, the indicator in the parking sensor system button blinks as a reminder that the rear sensors have been turned off.

Cross Traffic Monitor

Monitors the rear corner areas using the radar sensors when reversing, and alerts you if a vehicle approaching from a rear corner is detected.

The system is convenient when you are backing out of a parking space.

Cross Traffic Monitor

Cross Traffic Monitor cannot detect all approaching vehicles and may not detect an approaching vehicle at all.


Failure to visually confirm that it is safe to back up the vehicle before doing so may result in a collision.

Do not solely rely on the system when reversing; always also use your mirrors, and look behind and to the sides of your vehicle before reversing.

Models with Parking Sensor System

The parking sensor system's alerting buzzer overrides the Cross Traffic Monitor buzzer when the parking sensors are detecting obstacles at the closest range.

How the System Works



The system activates when:

- The power mode is in ON.
- The Cross Traffic Monitor is turned on.
 Cross Traffic Monitor On and Off P. 507
- The transmission is in **R**.
- Your vehicle is moving at 3 mph (5 km/h) or lower.

Radar sensors: Underneath the rear bumper corners

When a vehicle is detected approaching from a rear corner, Cross Traffic Monitor alerts you with a buzzer and a displayed warning.

The system will not detect a vehicle that approaches from directly behind your vehicle, nor will it provide alerts about a detected vehicle when it moves directly behind your vehicle.

The system does not provide alerts for a vehicle that is moving away from your vehicle, and it may alert for pedestrians, bicycles, or stationary objects.

➢Cross Traffic Monitor

Cross Traffic Monitor may not detect or may delay alerting an approaching vehicle, or may alert without an approaching vehicle under the following conditions:

- An obstacle, such as another vehicle or a wall, near your vehicle's rear bumper, is blocking the radar sensor's scope.
- Your vehicle is moving at a speed of about 3 mph (5 km/h) or higher.
- A vehicle is approaching at a speed other than between about 6 and 16 mph (10 and 25 km/h).
- The system picks up external interference such as other radar sensors from another vehicle or strong radio waves transmitted from a facility nearby.
- Either corner of the rear bumper is covered with snow, ice, mud or dirt.
- When there is bad weather.
- Your vehicle is on an incline.
- Your vehicle is tilted due to a heavy load in the rear.
- Your vehicle is reversing toward a wall, a pole, a vehicle, and so on.

If rear bumper or the sensors have been improperly repaired or the rear bumper has been deformed. Have your vehicle checked by a dealer.

For proper operation, always keep the rear bumper corner area clean.

Do not cover the rear bumper corner area with labels or stickers of any kind.

When the System Detects a Vehicle

An arrow icon appears on the side a vehicle is approaching on the audio/information screen.



Top Down View

When the System Detects a Vehicle

If the 🗊 on the lower right changes to 🕱 in amber when the transmission is in $[\mathbf{R}]$, mud, snow, or ice, etc. may have accumulated in the vicinity of the sensor. The system is temporarily canceled. Check the bumper corners for any obstructions, and thoroughly clean the area if necessary.

If the $[\mathfrak{g}]$ comes on when the transmission is in $[\mathbb{R}]$, there may be a problem with the Cross Traffic Monitor system. Do not use the system and have your vehicle checked by a dealer.

If the display remains the same with the gear position is in $[\mathbf{R}]$, there may be a problem with the rear camera system and the Cross Traffic Monitor system. Do not use the system and have your vehicle checked by a dealer.

Cross Traffic Monitor On and Off




The system can be turned on and off on the audio/information screen by pressing the Cross Traffic Monitor icon.

You can also switch the system on and off using the audio/information screen. Customized Features P 354

About Your Multi-View Rear Camera

The audio/information screen can display your vehicle's rear view. The display automatically changes to the rear view when the transmission is put into $[\mathbf{R}]$.

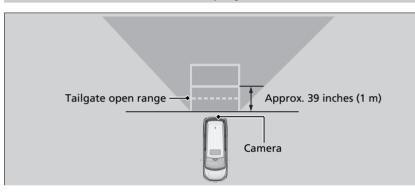

Multi-View Rear Camera Display Area

➢About Your Multi-View Rear Camera

The rear camera view is restricted. You cannot see the corner ends of the bumper or what is underneath the bumper. Its unique lens also makes objects appear closer or farther than they actually are.

Visually confirm that it is safe to drive before backing up. Certain conditions (such as weather, lighting, and high temperatures) may also restrict the rear view. Do not rely on the rearview display which does not give you all information about conditions at the back of your vehicle.

The rear camera view is displayed prior to the audio/ information screen.

If the camera lens is covered with dirt or moisture, use a soft, moist cloth to keep the lens clean and free of debris.

Rear Wiper/Washer P. 184


You can change the **Fixed Guideline** and **Dynamic Guideline** settings.

Customized Features P. 354

Fixed Guideline

ON: Guidelines appear when you put the transmission into R.
OFF: Guidelines do not appear.
Dynamic Guideline
ON: Guidelines move according to the steering wheel direction.
OFF: Guidelines do not move.

You can view three different camera modes on the audio/information screen. Touch the appropriate icon to switch the mode.

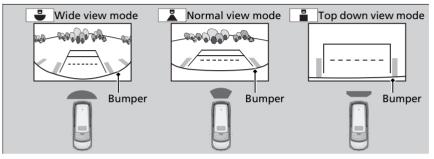

About Your Multi-View Rear Camera

If the vehicle's rear view is not displayed on the audio/ information screen while the shift position is in [R], there may be a problem with the system. Have your vehicle checked by a dealer immediately.

- If you were last using Wide view mode or Normal view mode, the same view mode will be activated the next time you put the transmission into **R**.
- If you were using Top down view mode before you turned off the engine, Wide view mode will be activated the next time you set the power mode to ON and put the transmission into **R**.
- If you were using Top down view mode and 10 seconds elapsed after you took the transmission out of R, Wide view mode will be activated the next time you put the transmission into R.
- If you were using Top down view mode and put the transmission back into **R** within 10 seconds after you took it out of **R**, Top down view mode will be activated.

Refueling

Fuel Information

Fuel recommendation

Unleaded gasoline, pump octane number 87 or higher

Use of a lower octane gasoline can cause a persistent, heavy metallic knocking noise that can lead to engine damage.

Top tier detergent gasoline

Because the level of detergency and additives in gasoline vary in the market, Honda endorses the use of "TOP TIER Detergent Gasoline" where available to help maintain the performance and reliability of your vehicle. TOP TIER Detergent Gasoline meets a new gasoline standard jointly established by leading automotive manufacturers to meet the needs of today's advanced engines.

Qualifying gasoline retailers will, in most cases, identify their gasoline as having met "TOP TIER Detergent Gasoline" standards at the retail location. This fuel is guaranteed to contain the proper level of detergent additives and be free of metallic additives. The proper level of detergent additives, and absence of harmful metallic additives in gasoline, help avoid buildup of deposits in your engine and emission control system.

For further important fuel-related information for your vehicle, or on information on gasoline that does not contain MMT, visit *www.hondacars.com.* In Canada, visit *www.honda.ca* (English), *www.honda.ca/fr* (French) for additional information on gasoline. For more information on top tier gasoline, visit *www.toptiergas.com.*

■ Fuel tank capacity: 19.5 US gal (73.8 L)

≫Fuel Information

NOTICE

We recommend quality gasoline containing detergent additives that help prevent fuel system and engine deposits. In addition, in order to maintain good performance, fuel economy, and emissions control, we strongly recommend the use of gasoline that does NOT contain harmful manganese-based fuel additives such as MMT, if such gasoline is available.

Use of gasoline with these additives may adversely affect performance, and cause the malfunction indicator lamp on your instrument panel to come on. If this happens, contact a dealer for service. Some gasoline today is blended with oxygenates such as ethanol. Your vehicle is designed to operate on oxygenated gasoline containing up to 15% ethanol by volume. Do not use gasoline containing methanol. If you notice any undesirable operating symptoms, try another service station or switch to another brand of gasoline.

How to Refuel

Your fuel tank is not equipped with a fuel filler cap. You can insert the filler nozzle directly into the filler neck. The tank seals itself again when you pull out the filler nozzle.



- **1.** Stop your vehicle with the service station pump on the left side of the vehicle in the rear.
- 2. Turn off the engine.
- **3.** Unlock the driver's door using the master door lock switch.
 - The fuel fill door on the outer side of the vehicle will unlock.

Locking/Unlocking the Doors from the Inside P. 137

- **4.** Press and release the area indicated by the arrow to release the fuel fill door. You will hear a click and the lid will open slightly.
- **5.** Manually pull the fuel fill door to a fully open position.

➢How to Refuel

Gasoline is highly flammable and explosive. You can be burned or seriously injured when handling fuel.

- Stop the engine, and keep heat, sparks, and flames away.
- Handle fuel only outdoors.
- Wipe up spills immediately.


The fuel filler opening is designed to accept only service station filler nozzles for refueling. Use of smaller diameter tubes (e.g., those used to siphon fuel for other uses) or other non-service station devices can damage the area in and around the filler opening.

Use the lock tab or the master door lock switch to unlock the fuel fill door.

The vehicle doors and fuel fill door automatically relock if the remote unlock function is used. This can be deactivated by briefly opening then closing the driver's door.

Using the Walk away auto lock® feature will also lock the fuel fill door. Always make sure both the driver's door and fuel fill door are unlocked before attempting to open the fuel fill door.

Locking the doors and tailgate (Walk away auto lock[®]) P. 130



- **6.** Place the end of the filler nozzle on the lower part of filler opening, then insert it slowly and fully.
 - Make sure that the end of the filler nozzle goes down along with the filler pipe.
 - ► Keep the filler nozzle level.
 - ► When the tank is full, the filler nozzle will click off automatically.
 - If you do not fill up the tank to full, always add a minimum of 3.5 US gal (13.3 L) of fuel.
 - ► After filling, wait about five seconds before removing the filler nozzle.
- 7. Shut the fuel fill door by hand.

➢How to Refuel

If the filler nozzle keeps turning off when the tank is not full, there may be a problem with the pump's fuel vapor recovery system. Try filling at another pump. If this does not fix the problem, consult a dealer.

The filler nozzle automatically stops to leave space in the fuel tank so that fuel does not overflow as a result of changes in air temperature.

Do not continue to add fuel after the filler nozzle has automatically stopped. Additional fuel can exceed the full tank capacity and cause fuel to spill.

If you repeatedly fill the tank with less than the specified minimum amount of fuel, the malfunction indicator lamp may come on. If this happens, have your vehicle checked by a dealer.

If you have to refuel your vehicle from a portable container, use the funnel provided with your vehicle.

Refueling From a Portable Fuel Container P. 610

Fuel Economy and CO₂ Emissions

Improving Fuel Economy and Reducing CO₂ Emissions

Achieving fuel economy and reducing CO_2 emissions is dependent on several factors, including driving conditions, load weight, idling time, driving habits, and vehicle condition. Depending on these and other factors, you may not achieve the rated fuel economy of this vehicle.

Maintenance and Fuel Economy

You can optimize your fuel economy with proper maintenance of your vehicle. Always maintain your vehicle in accordance with the messages displayed on the driver information interface.

• Use engine oil with the viscosity recommended.

Recommended Engine Oil P. 530

- Maintain the specified tire pressure.
- Do not load the vehicle with excess cargo.
- Keep your vehicle clean. A buildup of snow or mud on your vehicle's underside adds weight and increases wind resistance.

Improving Fuel Economy and Reducing CO₂ Emissions

Direct calculation is the recommended method to determine actual fuel consumed while driving.



In Canada, posted fuel economy numbers are established following a simulated test.

For more information on how this test is performed, please visit *https://www.nrcan.gc.ca* and search for "fuel consumption testing" in the search field at the top of the page.

This page intentionally left blank.

Maintenance

This chapter discusses basic maintenance.

Before Performing Maintenance

Inspection and Maintenance	. 516
Safety When Performing Maintenance	517
Parts and Fluids Used in Maintenand	e
Service	. 518
Maintenance Minder™	. 519
Maintenance Under the Hood	
Maintenance Items Under the Hood	. 527
Opening the Hood	. 528
Recommended Engine Oil	. 530
Oil Check	. 531
Adding Engine Oil	. 532

Changing the Engine Oil and Oil Filter	. 533
Engine Coolant	535
Transmission Fluid	537
Brake Fluid	538
Refilling Window Washer Fluid	539
Replacing Light Bulbs	540
Checking and Maintaining Wiper Blades	547
Checking and Maintaining Tires	
Checking Tires	551
Tire and Loading Information Label	552
Tire Labeling	552
DOT Tire Quality Grading (U.S. Vehicles)	554
Wear Indicators	556

Tire Service Life	. 556
Tire and Wheel Replacement	. 557
Tire Rotation	. 558
Winter Tires	. 559
Battery	. 560
Remote Transmitter Care	. 562
Climate Control System Maintenance.	563
Cleaning	
Interior Care	. 564
Exterior Care	
Accessories and Modifications	. 569

Inspection and Maintenance

For your safety, perform all listed inspections and maintenance to keep your vehicle in good condition. If you become aware of any abnormality (noise, smell, insufficient brake fluid, oil residue on the ground, etc.), have your vehicle inspected by a dealer. (Note, however, that service at a dealer is not mandatory to keep your warranties in effect.)

Types of Inspection and Maintenance

Routine inspections

Perform inspections before long distance trips, when washing the vehicle, or when refueling.

Maintenance P. 30

Periodic inspections

- Check the tire pressure monthly. Examine the tread for wear and foreign objects.
 Checking and Maintaining Tires P. 551
- Check the operation of the exterior lights monthly.
 ▶ Replacing Light Bulbs P. 540
- Check the condition of the wiper blades at least every six months.
 Checking and Maintaining Wiper Blades P. 547

➢Inspection and Maintenance

U.S. models

Maintenance, replacement, or repair of emissions control devices and systems may be done by any automotive repair establishment or individuals using parts that are "certified" to EPA standards.

According to state and federal regulations, failure to perform maintenance on the maintenance main items marked with # will not void your emissions warranties. However, all maintenance services should be performed in accordance with the intervals indicated by the driver information interface.

Maintenance Service Items P. 523

If you want to perform complex maintenance tasks that require more skills and tools, you can purchase a subscription to the Service Express website at *techinfo.honda.com*.

Authorized Manuals P. 626

If you want to perform maintenance yourself, make sure that you have the necessary tools and skills first. After performing maintenance, update the records in the separate maintenance booklet.

Safety When Performing Maintenance

Some of the most important safety precautions are given here. However, we cannot warn you of every conceivable hazard that can arise in performing maintenance. Only you can decide whether you should perform a given task.

Maintenance Safety

- To reduce the possibility of fire or explosion, keep cigarettes, sparks, and flames away from the battery and all fuel related parts.
- Never leave rags, towels, or other flammable objects under the hood.
 Heat from the surrounding parts can ignite them, causing a fire.
- To clean parts, use a commercially available degreaser or parts cleaner, not gasoline.
- Wear eye protection and protective clothing when working with the battery or compressed air.
- Engine exhaust contains carbon monoxide, which is poisonous and can kill you.
 Only operate the engine if there is sufficient ventilation.

Safety When Performing Maintenance

Improperly maintaining this vehicle or failing to correct a problem before driving can cause a crash in which you can be seriously hurt or killed.

Always follow the inspection and maintenance recommendations according to the schedules in this owner's manual.

Failure to properly follow maintenance instructions and precautions can cause you to be seriously hurt or killed.

Always follow the procedures and precautions in this owner's manual.

Vehicle Safety

- The vehicle must be in a stationary condition.
 - Make sure your vehicle is parked on level ground, the parking brake is set, and the engine is off.
- Make sure that the radiator fan is stopped before inspecting the engine compartment.
 - Depending on the vehicle condition, the radiator fan may operate even when the power mode is in VEHICLE OFF.
- Be aware that hot parts can burn you.
 - Make sure to let the engine and exhaust system cool thoroughly before touching vehicle parts.
- Be aware that moving parts can injure you.
 - Do not start the engine unless instructed, and keep your hands and limbs away from moving parts.
 - Do not open the hood while the Auto Idle Stop function is activated.

Parts and Fluids Used in Maintenance Service

The use of Honda Genuine Parts and fluids is recommended when maintaining and servicing your vehicle. Honda Genuine Parts are manufactured according to the same high quality standards used in Honda vehicles.

Parts and Fluids Used in Maintenance Service

NOTICE

Do not press the engine cover forcibly. This may damage the engine cover and component parts.

If the engine oil life is less than 15%, you will see the Maintenance Minder messages appear on the driver information interface every time you set the power mode to ON. The messages notify you when to change the engine oil, or when to bring your vehicle to a dealer for indicated maintenance services.


To Use Maintenance Minder™

Displaying the Maintenance Minder Information

Maintenance items, which should be serviced at the same time that you replace the engine oil, appear on the driver information interface.

You can view them on the engine oil life screen at any time.

- **1.** Set the power mode to ON.
- 2. Press the 🛖 (home) button.
- 3. Roll the left selector wheel until 🥓 is displayed.
- **4.** Press the left selector wheel to go to the Maintenance Minder screen. The engine oil life appears on the driver information interface along with maintenance items due soon.

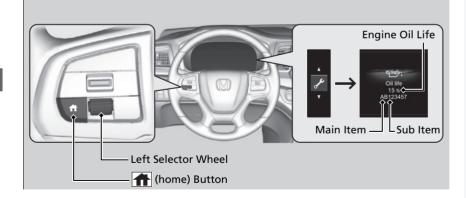

Displaying the Maintenance Minder Information

Based on the engine operating conditions, the remaining engine oil life is calculated and displayed as a percentage.

Displayed Engine Oil Life (%)	Calculated Engine Oil Life (%)
100	100 to 91
90	90 to 81
80	80 to 71
70	70 to 61
60	60 to 51
50	50 to 41
40	40 to 31
30	30 to 21
20	20 to 16
15	15 to 11
10	10 to 6
5	5 to 1
0	0

There is a list of maintenance main and sub items you can view on the driver information interface.

Maintenance Service Items P. 523


Maintenance Minder Messages on the Driver Information Interface

Maintenance Message	Oil Life Display	Explanation	Information
-	Oil life 100 % AB123457	When you select the Maintenance Minder screen, it displays codes for maintenance items due at the next engine oil change, along with the percentage of engine oil life remaining.	-
Maintenance Due Soon	15 % Oil life 15 % AB123457	The remaining engine oil life is 15 to 6 percent. Press the from (home) button to switch to another display.	The engine oil is approaching the end of its service life, and the maintenance items should be inspected and serviced soon.

Maintenance Message	Oil Life Display	Explanation	Information
Maintenance Due Now	5 % Oil life 5% AB123457	The remaining engine oil life is 5 to 1 percent. Press the f (home) button to switch to another display.	The engine oil has almost reached the end of its service life, and the maintenance items should be inspected and serviced as soon as possible.
Maintenance Past Due	Negative Distance	The engine oil life has passed its service life, and a negative distance appears after driving over 10 miles (U.S. models) or 10 km (Canadian models). The negative distance on the display blinks. Press the () (home) button to switch to another display.	The engine oil life has passed. The maintenance items must be inspected and serviced immediately.

The system message indicator () comes on along with the Maintenance Minder message.

Maintenance Service Items

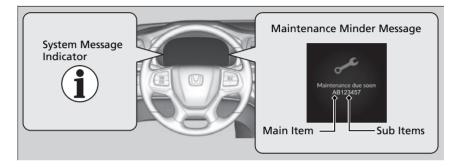

U.S. models

CODE	Maintenance Main Items	CODE	
А	 Replace engine oil^{*1} 	1	• Rota
В	 Replace engine oil^{*1} and oil filter 	2	• Rep
	 Inspect front and rear brakes 		• Rep
	 Inspect tie rod ends, steering gearbox, and boots 		• Insp
	 Inspect suspension components 	3	• Rep
	 Inspect driveshaft boots 	4	• Rep
	 Inspect brake hoses and lines (Including ABS/VSA®) 		• Rep
	 Inspect all fluid levels and condition of fluids 		 Insp
	 Inspect exhaust system# 	5	• Rep
	 Inspect fuel lines and connections[#] 	7	• Rep
A divict the v	alvas during convisas A. P. 1. 2. or 2 if they are poisy		· · · ·

Adjust the valves during services A, B, 1, 2, or 3 if they are noisy.

- *1: If the message Maintenance due now does not appear more than 12 months after the display is reset, change the engine oil every year.
- #: See information on maintenance and emissions warranty in the first column on page 623.

CODE	Maintenance Sub Items
1	Rotate tires
2	 Replace air cleaner element^{*2} Replace dust and pollen filter^{*3} Inspect drive belt
3	Replace transmission fluid
4	 Replace spark plugs Replace timing belt and inspect water pump^{*4} Inspect valve clearance
5	Replace engine coolant
7	 Replace brake fluid^{*5}

- *2: If you drive in dusty conditions, replace the air cleaner element every 15,000 miles (24,000 km).
 *3: If you drive primarily in urban areas that have high concentrations of soot in the air from industry and from disesI-powered vehicles, replace the dust and pollen filter every 15,000 miles (24,000 km).
 *4: If you drive regularly in very high temperatures (over 110°F, 43°C), in very low temperatures (under -20 °F, -29°C), replace every 60,000 miles(100,000 km).

*5: If a Maintenance Minder message does not appear more than 36 months after the display for item 7 is reset, change the brake fluid every 3 years.

Canadian models

CODE	Maintenance Main Items			
А	 Replace engine oil^{*1} 			
0	 Replace engine oil^{*1} and oil filter 			
Adjust the valves during services A, 0, 9, 1, 2, or 3 if they are noisy.				

*1: If the message Maintenance due now does not appear more than 12 months after the display is reset, change the engine oil every year.

CODE	Maintenance Sub Items		
1	Rotate tires		
2	Replace air cleaner element ^{*2}		
	 Replace dust and pollen filter^{*3} 		
	Inspect drive belt		
3	Replace transmission fluid		
4	Replace spark plugs		
	 Replace timing belt and inspect water pump^{*4} 		
	Inspect valve clearance		
5	 Replace engine coolant 		
7	 Replace brake fluid^{*5} 		
9	 Service front and rear brakes 		
	 Inspect tie rod ends, steering gearbox, and boots 		
	 Inspect suspension components 		
	 Inspect driveshaft boots 		
	 Inspect brake hoses and lines (including ABS/VSA[®]) 		
 Inspect all fluid levels and condition of fluids 			
	 Inspect exhaust system[#] 		
	 Inspect fuel lines and connections[#] 		
*3: If you dr from die *4: If you dr	ive in dusty conditions, replace the air cleaner element every 24,000 km (15,000 miles). ive primarily in urban areas that have high concentrations of soot in the air from industry and sel-powered vehicles, replace the dust and pollen filter every 24,000 km (15,000 miles). ive regularly in very high temperatures (over 43°C, 110°F), in very low temperatures (under 20°F), replace every 100,000 km (60,000 miles).		
	tenance Minder message does not appear more than 36 months after the display for item 7 is		

- *5: If a Maintenance Minder message does not appear more than 36 months after the display for item 7 is #: See information on maintenance and emissions warranty in the first column on page 625.

Resetting the Display

Reset the maintenance minder information display if you have performed the maintenance service.



- **1.** Set the power mode to ON.
- 2. Press the 🕋 (home) button.
- 3. Roll the left selector wheel until 🛹 is displayed.
- **4.** Press the left selector wheel to go to the Maintenance Minder screen.
- **5.** Press and hold the left selector wheel for about 10 seconds to enter the reset mode.
- Roll the left selector wheel to select a maintenance item to reset, or to select All due items (You can also select Cancel to end the process).
- 7. Press the left selector wheel to reset the selected item.
- 8. Repeat from step 5 for other items you wish to reset.

Resetting the Display

NOTICE


Failure to reset the Maintenance Minder[™] display after a maintenance service results in the system showing incorrect maintenance intervals, which can lead to serious mechanical problems.

The dealer will reset the Maintenance Minder[™] display after completing the required maintenance service. If someone other than a dealer performs maintenance service, reset the Maintenance Minder[™] display yourself.

You can also reset the Maintenance Minder[™] display using the audio/information screen.


Customized Features P. 354

Maintenance Items Under the Hood

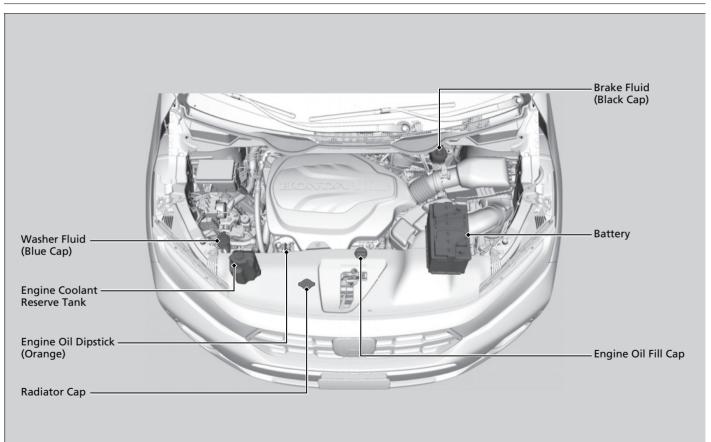

Opening the Hood





Pull the hood release handle under the driver's side lower corner of the dashboard.
 The head will per up slightly.

3. Pull up the hood latch lever (located under

the front edge of the hood to the center)

and raise the hood. Once you have raised the hood slightly, you can release the lever.

The hood will pop up slightly.

➢Opening the Hood

NOTICE

Do not open the hood when the wiper arms are raised. The hood will strike the wipers, resulting in possible damage to the hood and/or the wipers.


NOTICE


Do not press the engine cover forcibly. This may damage the engine cover and component parts.

When closing the hood, check that the hood is securely latched.

If the hood latch lever moves stiffly, or if you can open the hood without lifting the lever, the latch mechanism should be cleaned and lubricated.

Do not open the hood while the Auto Idle Stop function is activated.






4. Remove the support rod from the clamp using the grip. Mount the support rod in the hood.

When closing, remove the support rod and stow it in the clamp, then gently lower the hood. Remove your hand at a height of approximately 12 inches (30 cm) and let the hood close.

Engine Compartment Cover

The component parts in the engine compartment are protected by a cover. You may need to remove the cover when you perform certain maintenance work. Pull up on the engine compartment cover and remove it from the retaining clips.

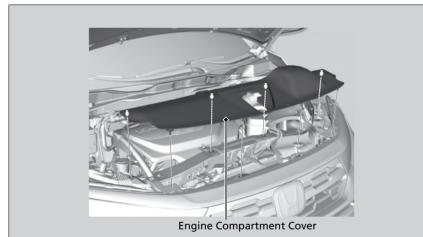

Recommended Engine Oil

Use a genuine engine oil or another commercial engine oil of suitable type and viscosity (for the ambient temperature) as shown in the image that follows.

Oil is a major contributor to your engine's performance and longevity. If you drive the vehicle with insufficient or deteriorated oil, the engine may fail or be damaged.

Genuine Engine Oil	Commercial Engine Oil
Honda Genuine Motor Oil	 API service SN or higher grade API Certification Mark "Starburst"
Genuine Motor 011 0W-20*1 -20 0 20 40 60 80 100(°F) -30 -20 -10 0 10 20 30 40(°C) Ambient Temperature	-20 0 20 40 60 80 100(°F) -30 -20 -10 0 10 20 30 40(°C) Ambient Temperature

*1:Formulated to improve fuel economy.

Synthetic oil

You may also use synthetic motor oil if it is labeled with the API Certification Seal and is the specified viscosity grade.

➢Recommended Engine Oil

Engine Oil Additives

Your vehicle does not require oil additives. In fact, they may adversely affect the engine performance and durability.


The following seal indicates the oil is energy conserving and that it meets the American Petroleum Institute's latest requirements.



Oil Check

We recommend that you check the engine oil level every time you refuel. Park the vehicle on level ground.

Wait approximately three minutes after turning the engine off before you check the oil.




- **1.** Remove the dipstick (orange).
- **2.** Wipe the dipstick with a clean cloth or paper towel.
- **3.** Insert the dipstick back all the way into its hole.

4. Remove the dipstick again, and check the level. It should be between the upper and lower marks. Add oil if necessary.

≥Oil Check

If the oil level is near or below the lower mark, slowly add oil, being careful not to overfill.



Adding Engine Oil



- **1.** Unscrew and remove the engine oil fill cap.
- 2. Add oil slowly.
- **3.** Reinstall the engine oil fill cap, and tighten it securely.
- **4.** Wait for three minutes and recheck the engine oil dipstick.

➢Adding Engine Oil

NOTICE


Do not fill the engine oil above the upper mark. Overfilling the engine oil may result in leaks and engine damage.

If any oil spills, wipe it away immediately. Spilled oil may damage the engine compartment components.

Changing the Engine Oil and Oil Filter

You must change the engine oil and oil filter regularly in order to maintain the engine's lubrication. The engine may be damaged if they are not changed regularly.

Change the oil and filter in accordance with the maintenance message on the driver information interface.




- **1.** Run the engine until it reaches normal operating temperature, and then turn the engine off.
- **2.** Open the hood and remove the engine oil fill cap.
- **3.** Remove the drain bolt and washer from the bottom of the engine, and drain the oil into a suitable container.

Changing the Engine Oil and Oil Filter

NOTICE

You may damage the environment if you do not dispose of the oil in a suitable way. If you are changing the oil by yourself, appropriately dispose of the used oil. Put the oil in a sealed container and take it to a recycling center. Do not throw the oil away into a garbage can or onto the ground.



- **4.** Remove the oil filter and dispose of the remaining oil.
- **5.** Check that the filter gasket is not stuck to the engine contact surface.

▶ If it is stuck, you must detach it.

- **6.** Wipe away dirt and dust adhering to the contact surface of the engine block, and install a new oil filter.
 - Apply a light coat of new engine oil to the filter gasket.
- **7.** Put a new washer on the drain bolt, then reinstall the drain bolt.
 - ► Tightening torque:
 - 29 lbf·ft (40 N·m, 4.0 kgf·m)
- **8.** Pour the recommended engine oil into the engine.
 - Engine oil change capacity (including filter):
 - 5.7 US qt (5.4 L)
- **9.** Reinstall the engine oil fill cap securely and start the engine.
- **10.** Run the engine for a few minutes, and then check that there is no leak from the drain bolt or oil filter.
- **11.** Stop the engine, wait for three minutes, and then check the oil level on the dipstick.
 - ▶ If necessary, add more engine oil.

Changing the Engine Oil and Oil Filter

You will need a special wrench to replace the oil filter. You can buy this wrench from a dealer.

When installing the new oil filter, follow the instructions supplied with the oil filter.

Reinstall the engine oil fill cap. Start the engine. If the **Engine oil pressure low** warning appears, turn off the engine, and check your work.


Engine Coolant

Specified coolant: Honda Long Life Antifreeze/Coolant Type 2

This coolant is premixed with 50% antifreeze and 50% water. Do not add any straight antifreeze or water.

We recommend you check the engine coolant level every time you refuel. Check the reserve tank first. If it is completely empty, also check the coolant level in the radiator. Add the engine coolant accordingly.

Reserve Tank

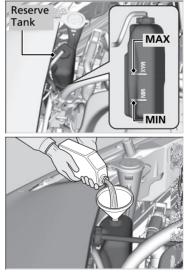

- 1. Make sure the engine and radiator are cool.
- **2.** Check the amount of coolant in the reserve tank.
 - If the coolant level is below the MIN mark, add the specified coolant until it reaches the MAX mark.
- **3.** Inspect the cooling system for leaks.

➢Engine Coolant

Removing the radiator cap while the engine is hot can cause the coolant to spray out, seriously scalding you.

Always let the engine and radiator cool down before removing the radiator cap.


NOTICE

Genuine Honda engine coolant is a 50/50 mixture of antifreeze and water that can withstand freezing at temperatures as low as about -31°F (-35°C). If your vehicle is consistently subjected to temperatures below this, the concentration of antifreeze in the coolant should be increased. Consult a dealer for details.

If Honda antifreeze/coolant is not available, you may use another major brand of non-silicate coolant as a temporary replacement. Check that it is a high quality coolant recommended for aluminum engines. Continued use of any non-Honda coolant can result in corrosion, causing the cooling system to malfunction or fail. Have the cooling system flushed and refilled with Honda antifreeze/coolant as soon as possible.

Do not add rust inhibitors or other additives to your vehicle's cooling system. They may not be compatible with the coolant or with the engine components.

Radiator



- 1. Make sure the engine and radiator are cool.
- **3.** Turn the radiator cap 1/8th turn counterclockwise and relieve any pressure in the cooling system.
- **4.** Push down and turn the radiator cap counter-clockwise to remove it.
- **5.** The coolant level should be up to the base of the filler neck. Add coolant if it is low.
- **6.** Put the radiator cap back on, and tighten it fully.

≫Radiator

NOTICE

Pour the fluid slowly and carefully so you do not spill any. Clean up any spills immediately; they can damage components in the engine compartment.

Transmission Fluid

Automatic Transmission Fluid

Specified fluid: Honda ATF-Type 2

Have a dealer check the fluid level and replace if necessary.

Do not attempt to check or change the automatic transmission fluid yourself.

➢Automatic Transmission Fluid

NOTICE

Honda ATF-Type 2 fluid must not be mixed with other transmission fluids.


Using a transmission fluid other than Honda ATF-Type 2 may adversely affect the operation and durability of your vehicle's transmission, and damage the transmission.

Any damage caused by using a transmission fluid that is not equivalent to Honda ATF-Type 2 is not covered by Honda's new vehicle limited warranty.

Brake Fluid

Specified fluid: Honda Heavy Duty Brake Fluid DOT 3

Checking the Brake Fluid



The fluid level should be between the **MIN** and **MAX** marks on the side of the reserve tank.

≫Brake Fluid

NOTICE

Brake fluid marked DOT 5 is not compatible with your vehicle's braking system and can cause extensive damage.

If the specified brake fluid is not available, you should use only DOT 3 or DOT 4 fluid from a sealed container as a temporary replacement.

Using any non-Honda brake fluid can cause corrosion and decrease the longevity of the system. Have the brake system flushed and refilled with Honda Heavy Duty Brake Fluid DOT 3 as soon as possible.

If the brake fluid level is at or below the **MIN** mark, have a dealer inspect the vehicle for leaks or worn brake pads as soon as possible.

Refilling Window Washer Fluid

Check the amount of window washer fluid by looking at the reservoir.

If the level is low, fill the washer reservoir.

Canadian models

If the washer fluid is low, a message appears on the driver information interface.


➢Refilling Window Washer Fluid

NOTICE

Do not use engine antifreeze or a vinegar/water solution in the windshield washer reservoir. Antifreeze can damage your vehicle's paint. A vinegar/water solution can damage the windshield washer pump.

Use only commercially available windshield washer fluid.

Avoid prolonged use of hard water to prevent lime scale buildup.



Pour the washer fluid carefully. Do not overflow the reservoir.

Replacing Light Bulbs

Headlights

Headlights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

Fog Lights

Fog lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

Parking/Daytime Running Lights

Parking/daytime running lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.


➢Headlights

The headlight aim is set by the factory, and does not need to be adjusted. However, if you regularly carry heavy items in the cargo area or tow a trailer, have the aiming readjusted at a dealer or by a qualified technician.

Front Turn Signal Light Bulbs

When replacing, use the following bulbs.

Front Turn Signal Light: 28/8 W (Amber)



Bulb Socket Turn the steering wheel all the way to the opposite side from the light being replaced.
 Passenger side: Turn the steering wheel to the left.


Driver side: Turn the steering wheel to the right.

- **2.** Remove the screws, and pull the inner fender back.
- **3.** Rotate the socket counter-clockwise and remove it.
- **4.** Remove the old bulb and insert a new bulb.

Front Side Marker Light Bulbs

When replacing, use the following bulb.

Front Side Marker Light: 3 CP

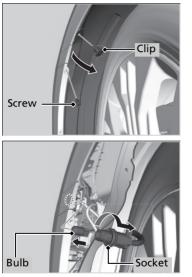


 Turn the steering wheel all the way to the opposite side from the light being replaced.
 Passenger side: Turn the steering wheel to the left.

Driver side: Turn the steering wheel to the right.


- **2.** Remove the holding clip and screw, and pull the inner fender back.
- **3.** Rotate the socket counter-clockwise and remove it.
- **4.** Remove the old bulb and insert a new bulb.

➢Front Side Marker Light Bulbs

Press down the center pin until it clicks to unlock it.



Push the center pin back to lock the clip. Then, insert the clip into the hole and press on the center pin until it is flat.




Side Turn Signal/Emergency Indicator Lights

Door mirror side turn lights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

Brake, Rear Turn Signal Light Bulbs, and Rear Side Marker/Taillights

When replacing, use the following bulbs.

Brake Light: 21 W Rear Turn Signal Light: 21 W Rear Side Marker/Taillight: LED




Grommet Pin Bolts

- **1.** Use a Phillips-head screwdriver to remove the bolt.
- **2.** Pull the cover out of the rear pillar.

- **3.** Use a Phillips-head screwdriver to remove the bolts.
- **4.** Pull on the light assembly to rotate about the grommet and remove from the rear pillar.

Brake, Rear Turn Signal Light Bulbs, and Rear Side Marker/ Taillights

Rear side marker/taillights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.



- **5.** Turn the socket counter-clockwise and remove it. Remove the old bulb.
- **6.** Insert a new bulb and turn the socket clockwise.
- **7.** Slide the light assembly onto the guide on the body.
- **8.** Align the pin with the body grommet, then push in until it fully seats.

Back-Up Light Bulbs/Taillights

When replacing, use the following bulbs.

Back-Up Light: 21 W Taillight: LED





- **1.** Remove the cover by prying on the edge of the cover using a flat-tip screwdriver.
 - Wrap the flat-tip screwdriver with a cloth to prevent scratches.

- **2.** Turn the socket counter-clockwise and remove it.
- **3.** Remove the old bulb and insert a new bulb.

Back-Up Light Bulbs/Taillights

Taillights are LED type. Have an authorized Honda dealer inspect and replace the light assembly.

Rear License Plate Light

Rear license plate light is LED type. Have an authorized Honda dealer inspect and replace the light assembly.

High-Mount Brake Light

High-mount brake light is LED type. Have an authorized Honda dealer inspect and replace the light assembly.

Checking Wiper Blades

If the wiper blade rubber has deteriorated, it will leave streaks and become noisy, and the hard surfaces of the blade may scratch the window glass.

Lifting the Front Wiper Arms



- **1.** Set the power mode to VEHICLE OFF.
- 2. While holding the wiper switch in the **MIST** position, set the power mode to ON, then to VEHICLE OFF.
 - Both wiper arms are set to the maintenance position as shown in the image.
- 3. Lift both wiper arms.

➢Lifting the Front Wiper Arms


NOTICE

When lifting the wiper arms, always follow the instructions to move them into the maintenance position.

The wiper arms may be damaged if they are moved manually.



Changing the Front Wiper Blade Rubber




- **1.** Lift both wiper arms.
 - Lifting the Front Wiper Arms P. 547
- **2.** Press up on and hold the tab, then slide the holder off the wiper arm.

Changing the Front Wiper Blade Rubber


NOTICE

Avoid dropping the wiper arm onto the windshield, as it may damage the wiper arm and/or the windshield.




3. Pull the end of the wiper blade in the direction of the arrow in the image until it is out of the holder's end cap.

- Holder
- **4.** Pull the wiper blade in the opposite direction to slide it out of the holder.



- **5.** Insert the flat side of the new wiper blade onto the bottom part of the holder. Insert the blade all the way.
- **6.** Install the end of the wiper blade into the cap.
- **7.** Slide the holder onto the wiper arm until it locks.
- 8. Lower both wiper arms.
- **9.** Set the power mode to ON and hold the wiper switch in the **MIST** position until both wiper arms return to the standard position.

Changing the Rear Wiper Blade Rubber



- 1. Raise the wiper arm off.
- **2.** Pivot the bottom end of the wiper blade up until it comes off from the wiper arm.


➢Changing the Rear Wiper Blade Rubber

NOTICE

Do not try to forcefully lift up the wiper arm. The wiper arm may be damaged if it is lifted too high.

NOTICE

Avoid dropping the wiper arm, as it may damage the rear window.

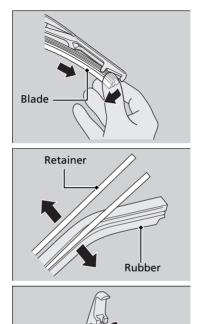

3. Slide the blade out of the holder.

4. Remove the retainers from wiper blade and mount it to a new rubber blade.

5. Slide the new wiper blade onto the holder.
 ▶ Make sure it is engaged correctly, then install the wiper blade assembly onto the wiper arm.

Checking Tires

To safely operate your vehicle, your tires must be of the proper type and size, in good condition with adequate tread, and properly inflated.

■ Inflation guidelines

Properly inflated tires provide the best combination of handling, tread life, and comfort. Refer to the driver's doorjamb label or specifications page for the specified pressure.

Underinflated tires wear unevenly, adversely affect handling and fuel economy, and are more likely to fail from overheating.

Overinflated tires make your vehicle ride harshly, are more prone to road hazards, and wear unevenly.

Every day before you drive, look at each of the tires. If one looks lower than the others, check the pressure with a tire gauge.

At least once a month or before long trips, use a gauge to measure the pressure in all tires, including the spare. Even tires in good condition can lose 1-2 psi (10-20 kPa, 0.1-0.2 kgf/cm²) per month.

■ Inspection guidelines

Every time you check inflation, also examine the tires and valve stems. Look for:

- Bumps or bulges on the side or in the tread. Replace the tire if you find any cuts, splits, or cracks in the side of the tire. Replace it if you see fabric or cord.
- Remove any foreign objects and inspect for air leaks.
- Uneven tread wear. Have a dealer check the wheel alignment.
- Excessive tread wear.

Wear Indicators P. 556

• Cracks or other damage around valve stem.

➢Checking Tires

Using tires that are excessively worn or improperly inflated can cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding tire inflation and maintenance.


Measure the air pressure when tires are cold. This means the vehicle has been parked for at least three hours, or driven less than 1 mile (1.6 km). If necessary, add or release air until the specified pressure is reached.

If checked when hot, tire pressure can be as much as 4–6 psi (30–40 kPa, 0.3–0.4 kgf/cm²) higher than if checked when cold.


Have a dealer check the tires if you feel a consistent vibration while driving. New tires and any that have been removed and reinstalled should be properly balanced.

Tire and Loading Information Label

The label attached to the driver's doorjamb provides necessary tire and loading information.

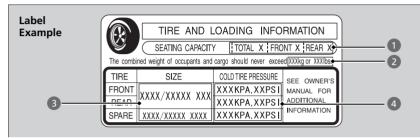

Tire Labeling



The tires that came on your vehicle have a number of markings. Those you should be aware of are described as shown.

Tire Sizes

Whenever tires are replaced, they should be replaced with tires of the same size.

➢Tire and Loading Information Label

The tire and loading information label attached to the driver's doorjamb contains:

- 1 The number of people your vehicle can carry.
- The total weight your vehicle can carry. Do not exceed this weight.
- 3 The original tire sizes for front, rear, and spare.
- The proper cold tire pressure for front, rear, and spare.

≫Tire Sizes

Following is an example of tire size with an explanation of what each component means.
P235/60 R18 102T
P: Vehicle type (P indicates passenger vehicle).
235: Tire width in millimeters.
60: Aspect ratio (the tire's section height as a percentage of its width).
R: Tire construction code (R indicates radial).
18: Rim diameter in inches.
102: Load index (a numerical code associated with the maximum load the tire can carry).
T: Speed symbol (an alphabetical code indicating the maximum speed rating).

Tire Identification Number (TIN)

The tire identification number (TIN) is a group of numbers and letters that look like the examples in the side column. TIN is located on the sidewall of the tire.

Glossary of Tire Terminology

Cold Tire Pressure – The tire air pressure when the vehicle has been parked for at least three hours or driven less than 1 mile (1.6 km).

Load Rating – Means the maximum load that a tire is rated to carry for a given inflation pressure.

Maximum Inflation Pressure – The maximum tire air pressure that the tire can hold.

Maximum Load Rating – Means the load rating for a tire at the maximum permissible inflation pressure for that tire.

Recommended Inflation Pressure – The cold tire inflation pressure recommended by the manufacturer.

Treadwear Indicators (TWI) – Means the projections within the principal grooves designed to give a visual indication of the degrees of wear of the tread.

➡Tire Identification Number (TIN)

There are two different formats that the TIN may be listed in.

Format A

DOT B97R FW6X 2209

DOT: This indicates that the tire meets all requirements of the U.S. Department of Transportation.

B97R: Manufacturer's identification mark. FW6X: Tire type code.

22 09: Date of manufacture.



Format B

DOT 1A3 OFBEKP 1522

DOT: This indicates that the tire meets all requirements of the U.S. Department of Transportation.

1A3: PLANT CODE

OFBEKP: MANUFACTURER'S CODE <u>15 22</u>: DATE CODE



DOT Tire Quality Grading (U.S. Vehicles)

The tires on your vehicle meet all U.S. Federal Safety Requirements. All tires are also graded for treadwear, traction, and temperature performance according to Department of Transportation (DOT) standards. The following explains these gradings.

Uniform Tire Quality Grading

Quality grades can be found where applicable on the tire sidewall between tread shoulder and maximum section width.

Treadwear

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 150 would wear one and one-half (1 1/2) times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate. ▶ Uniform Tire Quality Grading

For example: Treadwear 200 Traction AA Temperature A

All passenger car tires must conform to Federal Safety Requirements in addition to these grades.

Traction

The traction grades, from highest to lowest, are AA, A, B, and C. Those grades represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

Temperature

The temperature grades are A (the highest), B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades B and A represent higher levels of performance on the laboratory test wheel than the minimum required by law.


≫Traction

Warning: The traction grade assigned to this tire is based on straight-ahead braking traction tests, and does not include acceleration, cornering, hydroplaning, or peak traction characteristics.

➢Temperature

Warning: The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

Wear Indicators



The groove where the wear indicator is located is about 1/16 inch (about 1.6 mm) shallower than elsewhere on the tire. If the tread has worn so that the indicator is exposed, replace the tire. **Worn out tires have poor traction on wet roads.**

Tire Service Life

The life of your tires is dependent on many factors, including driving habits, road conditions, vehicle loading, inflation pressure, maintenance history, speed, and environmental conditions (even when the tires are not in use).

In addition to regular inspections and inflation pressure maintenance, it is recommended that you have annual inspections performed once the tires reach five years old. All tires, including the spare, should be removed from service after 10 years from the date of manufacture, regardless of their condition or state of wear.

Tire and Wheel Replacement

Replace your tires with radials of the same size, load range, speed rating, and maximum cold tire pressure rating (as shown on the tire's sidewall). Using tires of a different size or construction can cause certain vehicle systems such as the ABS and Vehicle Stability Assist™ (VSA®) system to work incorrectly.

It is best to replace all four tires at the same time. If that isn't possible, replace the front or rear tires in pairs.

Whenever you have a tire replaced or reset, make sure that the rubber valve stem is replaced and that the TPMS sensor is transferred from the old valve stem to the new one.

If you replace a wheel, make sure that the wheel's specifications match those of the original wheels.

➢Tire and Wheel Replacement


Installing improper tires on your vehicle can affect handling and stability. This can cause a crash in which you can be seriously hurt or killed.

Always use the size and type of tires recommended in this owner's manual.


Tire Rotation

Rotating tires according to the maintenance messages on the driver information interface helps to distribute wear more evenly and increase tire life.

Tires without rotation marks



Tires with rotation marks




Rotate the tires as shown here.

Rotate the tires as shown here

≫Tire Rotation

Tires with directional tread patterns should only be rotated front to back (not from one side to the other). Directional tires should be mounted with the rotation indication mark facing forward, as shown below.



Wheel nut torque for the tires that come standardequipped with your vehicle is as follows. Wheel nut torque: 94 lbf·ft (127 N·m, 13 kgf·m)

Winter Tires

If driving on snowy or frozen roads, mount all season marked **M+S** tires, snow tires, or tire chains; reduce speed; and maintain sufficient distance between vehicles when driving.

Be particularly careful when operating the steering wheel or brakes to prevent skidding.

Use tire chains, snow tires, or all season tires when necessary or according to the law.

When mounting, refer to the following points.

For winter tires:

- Select the size and load ranges that are the same as the original tires.
- Mount the tires to all four wheels.

For tire chains:

- Install them on the front tires only.
- Because your vehicle has limited tire clearance, we strongly recommend using the chains listed below:

Models with 235/60R18 tires

Peerless Auto-Trac 231905

Models with 235/55R19 tires

Peerless Auto-Trac 232405

- Follow the chain manufacturer's instruction when installing. Mount them as tightly as you can.
- Check that the chains do not touch the brake lines or suspension.
- Drive slowly.

≫Winter Tires

Using the wrong chains, or not properly installing chains, can damage the brake lines and cause a crash in which you can be seriously injured or killed.

Follow all instructions in this owner's manual regarding the selection and use of tire chains.

NOTICE

Traction devices that are the wrong size or improperly installed can damage your vehicle's brake lines, suspension, body, and wheels. Stop driving if they are hitting any part of the vehicle.

When tire chains are mounted, follow the chain manufacturer's instructions regarding vehicle operational limits.

If your vehicle is equipped with summer tires, be aware that these tires are not designed for winter driving conditions. For more information, contact a dealer.

Battery

Air Intake Duct

Checking the Battery



The condition of the battery is monitored by a sensor located on the negative terminal of the battery. If there is a problem with this sensor, the driver information interface will display a warning message. If this happens, have your vehicle inspected by a dealer.

Check the battery terminals for corrosion monthly.

To access the battery terminals:

- **1.** Remove the engine compartment cover.
 - Engine Compartment Cover P. 529
- **2.** Remove the clips using a Phillips-head screwdriver, then remove the air intake duct.

If your vehicle's battery is disconnected or goes dead:

• The audio system is disabled.

Reactivating the audio system P. 247

• The clock resets.

Canadian models only

The immobilizer system needs to be reset. Immobilizer System Indicator P. 102

≫Battery

The battery gives off explosive hydrogen gas during normal operation.

A spark or flame can cause the battery to explode with enough force to kill or seriously hurt you.

When conducting any battery maintenance, wear protective clothing and a face shield, or have a skilled technician do it.

WARNING: Battery post, terminals, and related accessories contain lead and lead compounds. **Wash your hands after handling.**

When you find corrosion, clean the battery terminals by applying a baking powder and water solution. Clean the terminals with a damp towel. Cloth/towel dry the battery. Coat the terminals with grease to help prevent future corrosion.

When replacing the battery, the replacement must be of the same specifications. Consult a dealer for more information.

Charging the AGM Battery

AGM labeled batteries like those installed in your vehicle require a compatible charger to be properly charged. Damage to the battery can result if the battery is charged improperly or with the wrong equipment. For more information on how to charge your vehicle's AGM battery, consult a dealer.

If the battery cable is removed while a system update is being performed, the electrical system can be permanently damaged. Only remove the battery cable when a system update is not being performed.

≫Battery

The battery installed in this vehicle is specifically designed for a model with Auto Idle Stop or System Updates. Using a battery other than this specified type may shorten the battery life, and prevent Auto Idle Stop or System Updates from activating. If you need to replace the battery, make sure to select the specified type and size. Ask a dealer for more details.

Replacing the Remote Battery

If the indicator does not come on when the button is pressed, replace the battery.



1. Remove the built-in key.

- With the buttons facing down, remove the upper half of the cover by carefully prying on the slot with the key grip.
 Wrap a key grip with a sloth to provent.
 - Wrap a key grip with a cloth to prevent scratching the keyless remote.

3. Remove the battery by prying on the edge with flat-tip screwdriver. Make sure to replace the battery with the correct polarity.
▶ Wrap a flat-tip screwdriver with a cloth to prevent scratching the keyless remote.

➢Replacing the Remote Battery

CHEMICAL BURN HAZARD


The battery that powers the remote transmitter can cause severe internal burns and can even lead to death if swallowed. Keep new and used batteries away from children.

If you suspect that a child has swallowed the battery, seek medical attention immediately.

NOTICE

An improperly disposed of battery can damage the environment. Always confirm local regulations for battery disposal.

Replacement batteries are commercially available or at a dealer.



Air Conditioning

To ensure proper and safe operation, the Society of Automotive Engineers (SAE J2845) recommends that the refrigerant system only be serviced by trained and certified technicians.

Never repair or replace the air conditioning evaporator (cooling coil) with one removed from a used or salvaged vehicle.

New replacement mobile air conditioning evaporators must be certified (and labeled) as meeting SAE Standard J2842.

➢Air Conditioning

NOTICE

Vented refrigerant is harmful to the environment. To avoid refrigerant from venting, never replace the evaporator with one removed from a used or salvaged vehicle.

Refrigerant in your vehicle's air conditioning system is flammable and can be ignited during servicing if proper procedures are not followed.

The air conditioner label is found under the hood: Safety Labels P. 90

Specifications P. 616

Canadian models



Dust and Pollen Filter

The climate control system is equipped with a dust and pollen filter that collects pollen, dust, and other debris in the air. The Maintenance Minder[™] messages will let you know when to replace the filter.

We recommend that you replace the dust and pollen filter sooner when using your vehicle in areas with high concentrations of dust.

Dust and Pollen Filter

If the airflow from the climate control system deteriorates noticeably, and the windows fog up easily, the filter may need to be replaced. Please contact a dealer for replacement.

System


Cleaning

Interior Care

Use a damp cloth with a mixture of mild detergent and warm water to remove dirt. Use a clean cloth to remove detergent residue.

Cleaning Seat Belts

Use a soft brush with a mixture of mild soap and warm water to clean the seat belts. Let the belts air dry. Wipe the loops of the seat belt anchors using a clean cloth.



Cleaning the Window

Wipe using a glass cleaner.

Interior Care

Do not spill liquids inside the vehicle. Electrical devices and systems may malfunction if liquids are splashed on them.

Do not use silicone-based sprays on electrical devices such as audio devices and switches. Doing so may cause the items to malfunction or cause a fire inside the vehicle.

If a silicone-based spray is inadvertently used on electrical devices, consult a dealer.

Depending on their composition, chemicals and liquid aromatics may cause discoloration, wrinkles, and cracking to resin-based parts and textiles. Do not use alkali solvents or organic solvents such as benzene or gasoline.

After using chemicals, make sure to gently wipe them off using a dry cloth.


Do not place used cloths on top of resin-based parts or textiles for long periods of time without washing.

➢Cleaning the Window

Wires are mounted to the inside of the rear window. Wipe along the same direction as the wires with a soft cloth so as not to damage them.

Be careful not to spill fluids, such as water or glass cleaner, on or around the cover of the electrical components around the rearview mirror.

Floor Mats

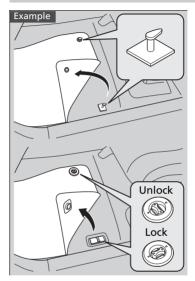

The driver's floor mat hooks over floor anchors, which keep the mat from sliding forward.

Do not put any additional floor mats on top of the anchored mat.

➢Floor Mats

If you use any floor mats that were not originally provided with your vehicle, make sure they are designed for your specific vehicle, fit correctly, and are securely anchored by the floor anchors. Position any second row seat floor mat properly. If not properly positioned, the floor mat can interfere with the front seat functions.

Maintaining Genuine Leather

It is important to clean or wipe away dirt or dust as soon as possible. Spills can soak into leather, resulting in stains. Dirt or dust can cause abrasions in the leather. In addition, please note that some dark colored clothing can rub onto the leather seats, resulting in discoloration or stains.

Maintaining Genuine Leather

To properly clean leather:

- 1. Use a vacuum or soft dry cloth first to remove any dirt or dust.
- **2.** Clean the leather with a soft cloth dampened with a solution comprised of 90% water and 10% neutral soap.
- **3.** Wipe away any soap residue with a clean damp cloth.
- 4. Wipe away residual water and allow leather to air dry in the shade.

Exterior Care

Dust off the vehicle body after you drive. Regularly inspect your vehicle for scratches on painted surfaces. A scratch on a painted surface can result in body rust. If you find a scratch, promptly repair it.


Washing the Vehicle

Wash the vehicle regularly. Wash more frequently when driving in the following conditions:

- If driving on roads with road salt.
- If driving in coastal areas.
- If tar, soot, bird droppings, insects, or tree sap is stuck to painted surfaces.

■Washing the Vehicle

Do not spray water into the air intake vents. It can cause a malfunction.



Do not spray water onto the capless unit when the fuel fill door is open. It can cause damage to the fuel system or engine.

If you need to lift the wiper arms away from the windshield, first set the wiper arms to the maintenance position.

Lifting the Front Wiper Arms P. 547

If water and any chemicals are on the brakes when your vehicle is being washed, drive a short distance and apply the brakes several times before parking. Parking while brakes are wet may cause them to be stuck by rust.

Using an Automated Car Wash

- Make sure to follow the instructions indicated on the automated car wash.
- Fold in the door mirrors.
- For models equipped with automatic intermittent wipers, turn the wipers off.

Using High Pressure Cleaners

- Keep sufficient distance between the cleaning nozzle and the vehicle body.
- Take particular care around the windows. Standing too close may cause water to enter the vehicle interior.
- Do not spray high pressure water directly into the engine compartment. Instead, use low pressure water and a mild detergent.
- Do not spray water directly onto the camera or the area around it. Water may enter the lens and cause the camera to malfunction.

Applying Wax

A good coat of automotive body wax helps protect your vehicle's paint from the elements. Wax will wear off over time and expose your vehicle's paint to the elements, so reapply as necessary.

Maintaining the Bumpers and Other Resin-Coated Parts

If you get gasoline, oil, engine coolant, or battery fluid on resin-coated parts, they may stain or the coating may peel. Promptly wipe it away using a soft cloth and clean water.

■ Using an Automated Car Wash

When using an automated car wash that pulls the vehicle through with a conveyor, make sure the transmission in $[\mathbf{N}]$ position.

If you want to keep the transmission in N position [car wash mode] P. 416

➢Applying Wax

NOTICE

Chemical solvents and strong cleaners can damage the paint, metal, and plastic on your vehicle. Wipe away spills immediately.

Maintaining the Bumpers and Other Resin-Coated Parts

Ask a dealer about the correct coating material when you want to repair the painted surface of the parts made of resin.

Cleaning the Window

Wipe using a glass cleaner.

Maintaining Aluminum Wheels

Aluminum is susceptible to deterioration caused by salt and other road contaminants. When necessary, as early as possible use a sponge and mild detergent to wipe away these contaminants. Do not use a stiff brush or harsh chemicals (including some commercial wheel cleaners). These can damage the protective finish on aluminum alloy wheels, resulting in corrosion. Depending on the type of finish, the wheels also may lose their luster or appear burnished. To avoid water stains, wipe the wheels dry with a cloth while they are still wet.

Fogged Exterior Light Lenses

The inside lenses of exterior lights (headlights, brake lights, etc.) may fog temporarily if you have driven in the rain, or after the vehicle has been run through a car wash. Dew condensation also may build up inside the lenses when there is a significant enough difference between the ambient and inside lens temperatures (similar to vehicle windows fogging up in rainy conditions). These conditions are natural processes, not structural design problems in the exterior lights. Lens design characteristics may result in moisture developing on the light lens frame

surfaces. This also is not a malfunction.

However, if you see large amounts of water accumulation, or large water drops building up inside the lenses, have your vehicle inspected by a dealer.

Accessories

When installing accessories, check the following:

- Do not install accessories on the windshield. They can obstruct your view and delay your reaction to driving conditions.
- Do not install any items other than Honda Genuine Accessories designated for your vehicle over areas marked **SRS AIRBAG**, on the sides or backs of the front seats, on front or side pillars, or near the side windows.

Items other than Honda Genuine Accessories designated for your vehicle installed in these areas may interfere with proper operation of the vehicle's airbags or may be propelled into you or another occupant if the airbags deploy.

• Be sure electronic accessories do not overload electrical circuits or interfere with proper operation of your vehicle.

Fuses P. 598

• Before installing any electronic accessory, have the installer contact a dealer for assistance. If possible, have a dealer inspect the final installation.

Accessories and Modifications

Improper accessories or modifications can affect your vehicle's handling, stability, and performance, and cause a crash in which you can be seriously hurt or killed.

Follow all instructions in this owner's manual regarding accessories and modifications.

Honda Genuine Accessories are recommended to ensure proper operation on your vehicle.

Some Honda Genuine Accessories are supplied with an exclusive owner's manual for the operation and care detail of the product. If an accessory owner's manual is provided to you, please refer to it for full detail.

If any Honda Genuine Accessories become inoperable, refer to the separate accessory owner's manual (if applicable) or consult a dealer for assistance to troubleshoot the potential faulty condition.

Modifications

Do not modify your vehicle in a manner that may affect its handling, stability, or reliability, or install non-genuine Honda parts or accessories that may have a similar effect.

Even minor modifications to vehicle systems can affect overall vehicle performance. Always make sure all equipment is properly installed and maintained, and do not make any modification to your vehicle or its systems that might cause your vehicle to no longer meet federal, state, province, territory, and local regulations.

The on-board diagnostic port (OBD-II/SAE J1962 connector) installed on this vehicle is intended to be used with automobile system diagnostic devices or with other devices that Honda has approved. Use of any other type of device may adversely affect the vehicle's electronic systems or allow them to be compromised, possibly resulting in a system malfunction, drained battery, or other unexpected problems.

Do not modify or attempt to repair any of the electrical components.

Handling the Unexpected

This chapter explains how to handle unexpected troubles.

Tools

Types of Tools57	2
If a Tire Goes Flat	
Changing a Flat Tire57	73
Engine Does Not Start	
Checking the Engine 58	32
If the Remote Battery is Weak	34
Emergency Engine Start58	35
Emergency Engine Stop58	36
If the Battery Is Dead	37
Overheating	
How to Handle Overheating58	39
Indicator Coming On/Blinking	
If the Engine oil pressure low Warning Appears 5	91

If the Charging System Indicator Comes
On 592
If the Malfunction Indicator Lamp Comes
On or Blinks 592
If the Brake System Indicator (Red) Comes
On or Blinks 593
If the Brake System Indicator (Red) Comes On or
Blinks at the Same Time When the Brake
System Indicator (Amber) Comes On 594
If the Electric Power Steering (EPS) System
Indicator Comes On 595
If the Low Tire Pressure/TPMS Indicator
Comes On or Blinks 596

If the Transmission System Indicator Blinks along with the Warning Message... 597


Fuses

Fuse Locations	598
Inspecting and Changing Fuses	604
Emergency Towing	605
If You Cannot Unlock the Fuel Fill Door	606
If You Cannot Open the Tailgate	607
If You Cannot Close the Power Sliding Door	s 609
Refueling	

Refueling From a Portable Fuel Container 610 In Case of Emergency or Vehicle Trouble .. 612

Tools

Types of Tools

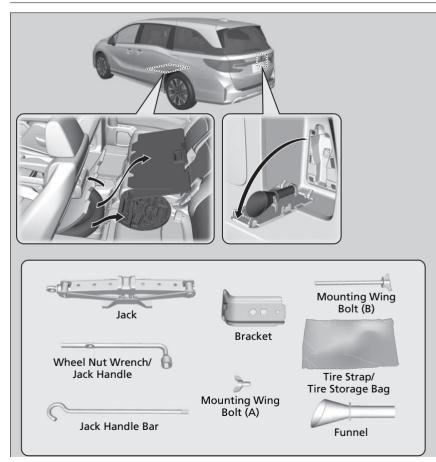

➢Types of Tools

The tools are stored in front of the second row seat and in the right side panel of the cargo area.

Changing a Flat Tire

If a tire goes flat while driving, grasp the steering wheel firmly and brake gradually to reduce speed. Then, stop in a safe place. Replace the flat tire with a compact spare tire. Go to a dealer as soon as possible to have the regular tire repaired or replaced.

- 1. Park the vehicle on a firm, level, non-slippery surface and apply the parking brake.
- **2.** Put the transmission into **P**.
- 3. Turn on the hazard warning lights and set the power mode to VEHICLE OFF.

Changing a Flat Tire

Follow compact spare precautions: Periodically check the tire pressure of the compact spare. It should be set to the specified pressure.


Specifications P. 616

When driving with the compact spare tire, keep the vehicle speed under 50 mph (80 km/h). Replace with a regular tire as soon as possible.

The compact spare tire and wheel in your vehicle are specifically for this model. Do not use them with another vehicle. Do not use another type of compact spare tire or wheel with your vehicle.

Do not mount tire chains on a compact spare tire. If a chain-mounted front tire goes flat, remove one of the regular rear tires and replace it with the compact spare tire. Remove the flat front tire and replace it with the regular tire that was removed from the rear. Mount the tire chains on the front tire.

Getting Ready to Replace the Flat Tire



- **1.** Remove the second row floor mat Eloor Mats P 565
- 2. Pull up the floor carpet.
- 3. Lift up the floor lid using the handle and remove it


- **4.** Take the tool case out of the compact spare tire well. Take the jack and wheel nut wrench out of the tool case
- 5. Unscrew the wing bolt, then remove the compact spare tire.

6. Place a wheel block or rock in front and rear of the wheel diagonal to the flat tire.

➢Changing a Flat Tire

NOTICE

Do not use the jack if it doesn't work properly. Call your dealer or a professional towing service.



The tire to be replaced.

- 0 Wheel Blocks




7. Place the compact spare tire (wheel side up) under the vehicle body, near the tire that needs to be replaced.



8. Loosen each wheel nut about one turn using the wheel nut wrench.

How to Set Up the Jack





1. Place the jack under the jacking point closest to the tire to be changed.

- **2.** Turn the end bracket clockwise as shown in the image until the top of the jack contacts the jacking point.
 - Make sure that the jacking point tab is resting in the jack notch.

3. Raise the vehicle, using the jack handle bar and the jack handle, until the tire is off the ground.

➢How to Set Up the Jack

The vehicle can easily roll off the jack, seriously injuring anyone underneath.

Follow the directions for changing a tire exactly, and never get under the vehicle when it is supported only by the jack.


Do not use the jack with people or luggage in the vehicle.

Use the jack provided in your vehicle. Other jacks may not support the weight ("load") or may not fit the jacking point.


The following instructions must be followed to use the jack safely:

- Do not use while the engine is running.
- Use only where the ground is firm and level.
- Use only at the jacking points.
- Do not get in the vehicle while using the jack.
- Do not put anything on top of or underneath the jack.

Turn off the sliding door main switch before replacing a rear tire. If the main switch is on, the power sliding door may accidentally operate, causing an accident.



Replacing the Flat Tire



ST /
SO)

1. Remove the wheel nuts and flat tire.

■Replacing the Flat Tire

Do not over tighten the wheel nuts by applying extra torque using your foot or a pipe.

- **2.** Wipe the mounting surfaces of the wheel with a clean cloth.
- **3.** Mount the compact spare tire.
- **4.** Screw the wheel nuts until they touch the lips around the mounting holes, then stop rotating.




5. Lower the vehicle and remove the jack. Tighten the wheel nuts in the order indicated in the image. Go around tightening the nuts two to three times in this order

Wheel nut torque:

94 lbf·ft (127 N·m, 13 kgf·m)

Storing the Flat Tire




The tire storage bag, bracket, mounting wing bolt (A) and mounting wing bolt (B) are in the tool case.


Storing the Flat Tire

before driving.


Loose items can fly around the interior in a crash and can seriously injure the occupants. Store the wheel, jack, and tools securely

1. Put the flat tire in the tire storage bag provided with your vehicle.






- 2. Pull down the U-shaped carpet piece.
- **3.** Remove the plastic screw with a coin.




4. Install the bracket and the mounting wing bolt (A) on the attachment point, and tighten the bolt.



- **5.** Install the flat tire on the bracket with the inside of the wheel facing toward you.
- **6.** Install the mounting wing bolt (B) to the bracket through one of the five wheel nut holes, and tighten the bolt.
 - Poke a hole in the storage bag as needed.

Storing a flat tire on the folded third row seat





- **1.** Turn over the flap on the left side of the cargo area floor.
- **2.** Pull down the U-shaped carpet piece and remove the plastic screw with a coin.

- **3.** Place the flat tire face down on the attachment point.
- **4.** Put the tire mounting wing bolt (B) in the attachment point through one of the five wheel nut holes, and tighten the bolt.
 - Poke a hole in the storage bag as needed.

TPMS with Tire Fill Assist and the Compact Spare Tire

If you replace a flat tire with the compact spare tire, the low tire pressure/TPMS indicator comes on while you are driving. After driving for a few miles (kilometers), **Tire pressure monitor system problem. Check tire pressure. See your dealer.** will appear on the driver information interface and the indicator will start blinking for a short time and then stay on; however, this is normal and is no cause for concern.

If you replace the tire with a regular tire, the warning message on the driver information interface and the low tire pressure/TPMS indicator will go off after a few miles (kilometers).

TPMS with Tire Fill Assist and the Compact Spare Tire

The system cannot monitor the pressure of the compact spare tire. Manually check the compact spare tire pressure to be sure that it is correct.

Use the TPMS specific wheels. Each is equipped with a tire pressure sensor mounted inside the tire behind the valve stem.

Checking the Engine

If the engine does not start, check the starter.

Starter condition	Checklist
Starter doesn't turn or turns	Check for a message on the driver information interface.
over slowly.	If the To start, touch start button with emblem side of remote message appears
The battery may be dead. Check	If the Remote Battery is Weak P. 584
each of the items on the right and	Make sure the remote is in its operating range.
respond accordingly.	Check the fuses.
	Check all fuses, or have your vehicle checked by a dealer.
	Inspecting and Changing Fuses P. 604
The starter turns over normally	Review the engine start procedure.
but the engine doesn't start.	Follow its instructions, and try to start the engine again.
There may be a problem with a	Starting the Engine P. 404
fuse. Check each of the items on	Check the immobilizer system indicator.
the right and respond accordingly.	When the immobilizer system indicator is blinking, the engine cannot be started.
	Immobilizer System P. 162
	Immobilizer System Indicator P. 102
	Check the fuel level.
	There should be enough fuel in the tank.
	Fuel Gauge P. 110
	Check the fuses.
	Check all fuses, or have your vehicle checked by a dealer.
	Inspecting and Changing Fuses P. 604
	If the problem continues:
	Emergency Towing P. 605

If you cannot start the engine after checking all the items in the list above, have your vehicle checked by a dealer.

If you must start the vehicle immediately, use an assisting vehicle or booster battery to jump start it.


If the Battery Is Dead P. 587

Depending on the situation, it may be possible to temporarily start the engine using the emergency start procedure.

Emergency Engine Start P. 585

If the Remote Battery is Weak

If the beeper sounds, the **To start, touch start button with emblem side of remote** message appears on the driver information interface, the **ENGINE START/ STOP** button flashes, and the engine won't start, start the engine as follows:



ENGINE START STOP

- **1.** Press the **ENGINE START/STOP** button.
 - The beeper sounds and the ENGINE START/STOP button flashes for about 30 seconds.
- Touch the center of the ENGINE START/ STOP button with the H logo on the keyless remote while the ENGINE START/STOP button is flashing. The buttons on the keyless remote should be facing you.
 - The beeper sounds, and the ENGINE START/STOP button stays on for about 10 seconds.
- 3. Depress the brake pedal and press the ENGINE START/STOP button while the ENGINE START/STOP button is on.
 - ► The engine starts.
 - If you don't depress the pedal, the mode will change to ACCESSORY.



Emergency Engine Start

If the engine cannot start using the normal starting procedure, you may be able to start it using the emergency start procedure below.

Do not use this procedure if it is not an emergency.

- **1.** Make sure the parking brake is applied.
- **2.** Check that the transmission is in $[\mathbf{P}]$, then set the power mode to ACCESSORY.
- **3.** Firmly depress the brake pedal, then press and hold the **ENGINE START/STOP** button for at least 15 seconds.

This should be considered a system malfunction even if you are able to start the engine using the above procedure.

Have your vehicle checked by a dealer immediately.

Emergency Engine Stop

The **ENGINE START/STOP** button may be used to stop the engine due to an emergency situation even while driving. If you must stop the engine, do either of the following operations:

- Press and hold the ENGINE START/STOP button for about two seconds.
- Firmly press the **ENGINE START/STOP** button three times.

The steering wheel will not lock. However, because turning off the engine disables the power assist the engine provides to the steering and braking systems, it will require significantly more physical effort and time to steer and slow the vehicle. Use both feet on the brake pedal to slow down the vehicle and stop immediately in a safe place.

The transmission automatically changes to [P] after the vehicle comes to a complete stop. Then, the power mode changes to VEHICLE OFF.

➢Emergency Engine Stop


NOTICE


Do not press the **ENGINE START/STOP** button while driving unless it is absolutely necessary for the engine to be turned off.

If you press the **ENGINE START/STOP** button while driving, the beeper sounds.

Jump Starting Procedure

Turn off the power to electric devices, such as audio and lights. Turn off the engine, then open the hood.





- **1.** Connect the first jumper cable to your vehicle's battery ⊕ terminal.
- 2. Connect the other end of the first jumper cable to the booster battery ⊕ terminal.
 - Use a 12-volt booster battery only.
 - When using an automotive battery charger to boost your 12-volt battery, select a lower charging voltage than 15volt. Check the charger manual for the proper setting.
- **3.** Connect the second jumper cable to the booster battery ⊖ terminal.
- **4.** Connect the other end of the second jumper cable to the engine mounting bolt as shown. Do not connect this jumper cable to any other part.
- **5.** If your vehicle is connected to another vehicle, start the assisting vehicle's engine and increase its RPM slightly.
- **6.** Attempt to start your vehicle's engine. If it turns over slowly, check that the jumper cables have good metal-to-metal contact.

∭Jump Starting Procedure

A battery can explode if you do not follow the correct procedure, seriously injuring anyone nearby.

Keep all sparks, open flames, and smoking materials away from the battery.

Securely attach the jumper cables clips so that they do not come off when the engine vibrates. Be careful not to tangle the jumper cables or allow the cable ends to touch each other while attaching or detaching the jumper cables.

Battery performance degrades in cold conditions and may prevent the engine from starting.

What to Do After the Engine Starts

Once your vehicle's engine has started, remove the jumper cables in the following order.

- **1.** Disconnect the jumper cable from your vehicle's engine mounting bolt.
- **2.** Disconnect the other end of the jumper cable from the booster battery \bigcirc terminal.
- **3.** Disconnect the jumper cable from your vehicle's battery \oplus terminal.
- **4.** Disconnect the other end of the jumper cable from the booster battery \oplus terminal.

Have your vehicle inspected by a nearby service station or a dealer.

How to Handle Overheating

Overheating symptoms are as follows:

- The **Engine temperature too hot. Do not drive. Allow engine to cool.** message appears on the driver information interface.
- Steam or spray comes out of the engine compartment.

First thing to do

- 1. Immediately park the vehicle in a safe place.
- 2. Turn off all accessories and turn on the hazard warning lights.
 - **No steam or spray present:** Keep the engine running and open the hood.
 - Steam or spray is present: Turn off the engine and wait until it subsides. Then, open the hood.

➢How to Handle Overheating


Steam and spray from an overheated engine can seriously scald you.

Do not open the hood if steam is coming out.

NOTICE

Continuing to drive with the **Engine temperature too hot. Do not drive. Allow engine to cool.** message on the driver information interface may damage the engine.

Next thing to do



 Check that the cooling fan is operating and stop the engine once the Engine temperature too hot. Do not drive. Allow engine to cool. message on the driver information interface disappears.
 If the cooling fan is not operating,

immediately stop the engine.

- **2.** Once the engine has cooled down, inspect the coolant level and check the cooling system components for leaks.
 - If the coolant level in the reserve tank is low, add coolant until it reaches the MAX mark.
 - If there is no coolant in the reserve tank, check that the radiator is cool. Cover the radiator cap with a heavy cloth and open the cap. If necessary, add coolant up to the base of the filler neck and put the cap back on.

Radiator P. 536

Last thing to do

Once the engine has cooled sufficiently, restart it and check the driver information interface. If the **Engine temperature too hot. Do not drive. Allow engine to cool.** message does not appear, resume driving. If it appears again, contact a dealer for repairs.

➢How to Handle Overheating

Removing the radiator cap while the engine is hot can cause the coolant to spray out, seriously scalding you.

Always let the engine and radiator cool down before removing the radiator cap.

If the coolant is leaking, contact a dealer for repairs.

Use water as an emergency/temporary measure only. Have a dealer flush the system with proper antifreeze as soon as possible.

If the Engine oil pressure low Warning Appears



■ Reasons for the warning to appear Appears when the engine oil pressure is low.

What to do as soon as the warning appears

- **1.** Immediately park the vehicle on level ground in a safe place.
- **2.** If necessary, turn the hazard warning lights on.

What to do after parking the vehicle

- **1.** Stop the engine and let it sit for approximately three minutes.
- **2.** Open the hood and check the oil level.
 - Add oil as necessary.Oil Check P. 531
- **3.** Start the engine and check the **Engine oil pressure low** warning.
 - ► The warning disappears: Start driving again.
 - The warning does not disappear within 10 seconds: Immediately stop the engine and contact a dealer for repairs.

➢If the Engine oil pressure low Warning Appears

NOTICE

Running the engine with low oil pressure can cause serious mechanical damage almost immediately.

If the Charging System Indicator Comes On



Reasons for the indicator to come on

Comes on when there is a problem with the charging system.

What to do when the indicator comes on

Stop in a safe place and have your vehicle checked by a dealer immediately.

If the Malfunction Indicator Lamp Comes On or Blinks



Reasons for the indicator lamp to come on or blink

- Comes on when there is a problem with the engine emissions control system.
- Blinks when engine misfiring is detected.

What to do when the indicator lamp comes on

Avoid high speeds and immediately get your vehicle inspected at a dealer.

What to do when the indicator lamp blinks

Park the vehicle in a safe place with no flammable items and wait at least 10 minutes or more with the engine stopped until it cools.

➢If the Charging System Indicator Comes On

If you need to stop temporarily, do not turn off the engine. Restarting the engine may rapidly discharge the battery.

≥If the Malfunction Indicator Lamp Comes On or Blinks

NOTICE

If you drive with the malfunction indicator lamp on, the emissions control system and the engine could be damaged.

If the malfunction indicator lamp blinks again when restarting the engine, drive to the nearest dealer at 31 mph (50 km/h) or less. Have your vehicle inspected.

If the Brake System Indicator (Red) Comes On or Blinks



- Reasons for the indicator to come on
- The brake fluid is low.
- There is a malfunction in the brake system.



(Red)

- What to do when the indicator comes on while driving Depress the brake pedal lightly to check pedal pressure.
- If normal, check the brake fluid level the next time you stop.
- If abnormal, take immediate action. If necessary, downshift the transmission to slow the vehicle using engine braking.

Reasons for the indicator to blink

• There is a problem with the electric parking brake system.

What to do when the indicator blinks

Avoid using the parking brake and have your vehicle checked by a dealer immediately.

If the Brake System Indicator (Red) Comes On or Blinks

Have your vehicle repaired immediately. It is dangerous to drive with low brake fluid. If there is no resistance from the brake pedal, stop immediately in a safe place. If necessary downshift the gears.

If the brake system indicator (red) and **ABS** indicator come on simultaneously, the electronic brake distribution system is not working. This can result in vehicle instability under sudden braking. Have your vehicle inspected by a dealer immediately.

If the brake system indicator (red) blinks at the same time when the brake system indicator (amber) comes on, the parking brake may not work.

Avoid using the parking brake and have your vehicle checked by a dealer immediately.

If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On P. 594

If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On



■ If the brake system indicator (red) comes on or blinks at the same time when the brake system indicator (amber) comes on, release the parking brake manually or automatically Parking Brake P. 490

•If the brake system indicator (red) continuously comes on or blinks at the same time when the brake system indicator (amber) comes on, stop the vehicle in a safe place and have it inspected by a dealer immediately.

To prevent the vehicle from moving, put the transmission into P.
 If only the brake system indicator (red) is turned off, avoid using the parking brake and have your vehicle checked by a dealer immediately.

If the Brake System Indicator (Red) Comes On or Blinks at the Same Time When the Brake System Indicator (Amber) Comes On

If you apply the parking brake, you may not be able to release it.

If the brake system indicator (red) and the brake system indicator (amber) come on at the same time, the parking brake is working.

If the brake system indicator (red) blinks at the same time when the brake system indicator (amber) comes on, the parking brake may not work because it is checking the system.



If the Electric Power Steering (EPS) System Indicator Comes On



- Reasons for the indicator to come on
- Comes on when there is a problem with the EPS system.
 What to do when the indicator comes on
- Stop the vehicle in a safe place and restart the engine. If the indicator comes on and stays on, immediately have your vehicle inspected by a dealer.
- If **Do not drive** displays on the driver information interface, immediately stop in a safe place and contact a dealer.

If the Low Tire Pressure/TPMS Indicator Comes On or Blinks



Reasons for the indicator to come on or blink

A tire pressure is significantly low. If there is a problem with the TPMS with Tire Fill Assist, the indicator blinks for about one minute, and then stay on.

If the compact spare tire is installed, the indicator will either come on or it will first blink for about one minute, then stay on.

What to do when the indicator comes on

Drive carefully and avoid abrupt cornering and hard braking. Stop your vehicle in a safe place. Check the tire pressure and adjust the pressure to the specified level. The specified tire pressure is on a label on the driver side doorjamb.

If the compact spare tire causes the indicator to come on, change the tire to a regular tire.

What to do when the indicator blinks, then remains on

Have the tire inspected by a dealer as soon as possible. If the compact spare tire causes the indicator to first blink, and then stay on, change the tire to a regular tire. The indicator goes off after driving for a few miles (kilometers).

≥If the Low Tire Pressure/TPMS Indicator Comes On or Blinks

NOTICE

Driving on an extremely underinflated tire can cause it to overheat. An overheated tire can fail. Always inflate your tires to the prescribed level.

Tire Fill Assist Function

TPMS with Tire Fill Assist provides visual and audible assistance during tire pressure adjustment. With the power mode in ON, while you adjust tire pressure up or down, the system alerts you as follows:

Below recommended pressure: The beeper sounds and exterior lights flash once every five seconds.

At recommended pressure: The beeper sounds and exterior lights flash rapidly for three seconds with five seconds intervals.

Above recommended pressure: The beeper sounds and lights flash twice every two seconds.

When a certain amount of time has passed since activation, Tire Fill Assist will be canceled until you set the power mode to OFF.

You cannot use Tire Fill Assist if the engine was started by the remote engine start, or if there is a malfunction in the system. If Tire Fill Assist does not work, use a tire pressure gauge.

If the Transmission System Indicator Blinks along with the Warning Message



Transmission system problem.

Apply parking brake when parked. See your dealer.

Reasons for the indicator to blink

The transmission is malfunctioning.

Immediately have your vehicle inspected by a dealer.

If the Transmission System Indicator Blinks along with the Warning Message

You may not be able to turn on the engine.

Make sure to set the parking brake when parking your vehicle.

Call a professional towing service if you need to tow your vehicle.

Emergency Towing P. 605

Fuse Locations


If any electrical devices are not working, set the power mode to VEHICLE OFF and check to see if any applicable fuse is blown.

Engine Compartment Fuse Box

Fuse box A

Located at the rear end of the engine compartment on the right side. Push the tabs to open the box.

Fuse locations are shown on the fuse box cover. Locate the fuse in question by the fuse number and box cover number.



Circuit Protected Amps 1 - - 2 - - 3 - - 4 IG1 VB SOL 10 A 5 VSA/ABS 5 A 6 Wiper 30 A 7 IG1 DBW 15 A 9 IGP 1 15 A 9 IGP 1 30 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A 20 SRM 1 30 A	Circuit protected and fuse rating			
2 – – 3 – – 4 IG1 VB SOL 10 A 5 VSA/ABS 5 A 6 Wiper 30 A 7 IG1 DBW 15 A 8 TCU 15 A 9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
3 - - 4 IG1 VB SOL 10 A 5 VSA/ABS 5 A 6 Wiper 30 A 7 IG1 DBW 15 A 8 TCU 15 A 9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
4 IG1 VB SOL 10 A 5 VSA/ABS 5 A 6 Wiper 30 A 7 IG1 DBW 15 A 8 TCU 15 A 9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
5 VSA/ABS 5 A 6 Wiper 30 A 7 IG1 DBW 15 A 8 TCU 15 A 9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
6 Wiper 30 A 7 IG1 DBW 15 A 8 TCU 15 A 9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
7 IG1 DBW 15 A 8 TCU 15 A 9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
8 TCU 15 A 9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
9 IGP 1 15 A 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
Image: 10 start Image: 10 start Image: 10 start 10 Sub Fan Motor 30 A 11 Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
Rear Driver's Side Power Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
11 Window 30 A 12 Ignition Coil/Injector 30 A 13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
13 TCU 2 10 A 14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
14 TCU 3 10 A 15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
15 SRM 2 30 A 16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
16 ST CUT 30 A 17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
17 Shutter Grill (10 A) 18 Back Up 10 A 19 Stop 10 A				
18 Back Up 10 A 19 Stop 10 A				
19 Stop 10 A	,			
•				
20 CDM 1 20 A				
21 Rear Passenger's Side Power Window 30 A				
22 ACM 30 A				
23 Hazard 15 A				
24 Washer 15 A				


. .

.

	Circuit Protected	Amps
25	Main Fan Motor	30 A
26	STRLD	5 A
27	IGPS	5 A
28	-	-
29	-	-
30	-	-
31	Injector	20 A
32	Ignition Coil	15 A
33	PDM	5 A

Fuse box B

Located near the \bigoplus terminal of the battery. Have a dealer inspect and replace the fuse.

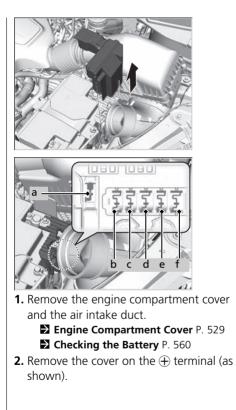


Circuit protected and fuse rating

	Circuit Protected	Amps
а	Battery Main	150 A
b	FET	70 A
С	R/B Main 1	70 A
d	R/B Main 2	70 A
е	EPS	70 A
f	-	60 A

Driver's Side Interior Fuse Box

Fuse box A




Located under the dashboard. Fuse locations are shown on the label on the side panel.

Locate the fuse in question by the fuse number and label number.

Circuit protected and fuse rating			
	Circuit Protected	Amps	
1	Meter	10 A	
2	Starter Motor	(10 A)	
3	Option	10 A	
4	-	-	
5	-	-	
6	Moonroof	(20 A)	
7	-	-	
8	Rear Fuse Box	10 A	
9	IG1 Front	15 A	
10	Rear Passenger's Door Lock	10 A	
11	Driver's Door Lock	10 A	
12	Front Passenger's Door Lock	10 A	
13	Front Passenger's Door Unlock	10 A	
14	Driver's Door Unlock	(10 A)	
15	Rear Wiper	10 A	
16	SMART	10 A	
17	Driver's Power Seat Reclining	20 A	
18	Heated Steering Wheel*	(10 A)	
19	Front Passenger's Power Seat Reclining	20 A	
20	SRS	10 A	
21	Fuel Pump	20 A	

	Circuit Protected	Amps
22	Front Accessory Power Socket	20 A
23	Front Fog Lights	(10 A)
24	-	(10 A)
25	Driver's Power Window	20 A
26	Rear Passenger's Door Unlock	10 A
27	ACC	10 A
28	SRS2	10 A
29	Driver's Power Seat Lumbar Support	(10 A)
30	Front Passenger's Power Seat Sliding	20 A
31	Driver's Power Seat Sliding	20 A
32	Tailgate Lock*	(10 A)
33	-	-
34	ACG	15 A
35	DRL	10 A
36	A/C	10 A
37	Radio	20 A
38	Door Lock Main	20 A
39	Front Passenger's Power Window	20 A

Fuse box B



Located under the dashboard. Fuse locations are shown on the label on the side panel.

Locate the fuse in question by the fuse number and label number.


Circuit protected and fuse rating		
	Circuit Protected	Amps
	DC/DC2	(30 A)
	DC/DC1	(30 A)
	EBB	40 A
1	Fuse Box Main1	50 A
I	Fuse Box Main2	50 A
	Rear Fuse Box Main1	50 A
	Rear Fuse Box Main2	50 A
	-	(60 A)
2	IG Main1	30 A
3	AC Outlet*	(30 A)
4	IG Main2	30 A
5	-	_
6	Rear Blower	30 A
7	Subwoofer*	(10 A)
8	IMG	10 A
9	Rear Defogger	40 A
10	_	_
11	Heated Windshield*	(15 A)
12	BMS	5 A
13	Audio Amp*	(30 A)
14	Front Passenger's Power Seat Lumbar Support*	(10 A)
15	USB Charger	(10 A)
16	VSA Motor	40 A
17	Front Blower	40 A

■ Circuit protected and fuse rating

	Circuit Protected	Amps
18	-	-
19	Horn	15 A
20	_	_
21	3rd Row Accessory Power Socket*	(20 A)
22	Shift By Wire	10 A
23	VBUM	10 A
24	VSA	40 A

* Not available on all models

Fuse box C



Located under the dashboard.

Fuse locations are shown on the label on the side panel.


Locate the fuse in question by the fuse number and label number.

■ Circuit protected and fuse rating

	Circuit Protected	Amps
а	Meter	(10 A)
b	VSA	(10 A)
С	ACG	(10 A)
d	Body Control Module	(10 A)
е	Radio	(20 A)
f	Back Up	(15 A)
g	ACC	(10 A)

Rear Side Interior Fuse Box

Located on the left side of cargo area. Take off the cover to open.




Fuse locations are shown on the fuse box cover.

Locate the fuse in question by the fuse number and box cover number.


Circuit protected and fuse rating		
	Circuit Protected	Amps
1	Rear Driver's Side Door Lock	10 A
2	Passenger's Side Power Sliding Door Closer	(20 A)
3	Power Tailgate Closer Motor*	(20 A)
4	Cargo Area's Accessory Power Socket	20 A
5	Fuel Fill Door	10 A
6	USB*	(10 A)
7	Driver's Side Power Sliding Door Closer	(20 A)
8	-	-
9	-	-
10	Trailer Hazard Lights*	(7.5 A)
11	Trailer Small Lights*	(7.5 A)
12	Trailer Main Lights*	(30 A)
13	-	-
14	Passenger's Side Power Sliding Door Motor	(30 A)
15	-	-
16	Power Tailgate Motor*	(40 A)
17	-	-
18	_	-
19	Driver's Side Power Sliding Door Motor	(30 A)

Inspecting and Changing Fuses



Fuse Puller

Combined Fuse



- **1.** Set the power mode to VEHICLE OFF. Turn headlights and all accessories off.
- **2.** Check the fuses on the battery in the engine compartment.
 - If the fuse is blown, have it replaced by a dealer.
- 3. Remove the fuse box cover.
- **4.** Inspect the small fuses in the engine compartment and the vehicle interior.
 - If there is a blown fuse, remove it with the fuse puller and replace it with a new one.

- **5.** Check the large fuse in the vehicle interior.
 - If the fuse is blown, use a Phillips-head screwdriver to remove the screw and replace it with a new one.

➢Inspecting and Changing Fuses

NOTICE

Replacing a fuse with one that has a higher rating greatly increases the chances of damaging the electrical system.

Use the charts to locate the fuse in question and confirm the specified amperage on the fuse label. **Fuse Locations** P. 598

Replace with a fuse of the same specified amperage.

There is a fuse puller on the back of the engine compartment fuse box cover.

Call a professional towing service if you need to tow your vehicle.

Flatbed equipment

The operator loads your vehicle on the back of a truck. This is the only way you can safely transport your vehicle.

Any other towing method will damage the vehicle's drive system.

Emergency Towing

NOTICE

Trying to lift or tow your vehicle by the bumpers will cause serious damage. The bumpers are not designed to support the vehicle's weight.


NOTICE

Improper towing such as towing behind a motorhome or other motor vehicle can damage the transmission.

Never tow your vehicle with just a rope or chain. It is very dangerous since ropes or chains may shift from side to side or break.

What to Do If Unable to Unlock the Fuel Fill Door

If you cannot unlock the fuel fill door, use the following procedure.




- **1.** Open the tailgate and remove the cover on the left side of cargo area.
- 2. Pull the release cord as shown.

What to Do If Unable to Unlock the Fuel Fill Door

After taking these steps, contact a dealer to have the vehicle checked.

What to Do If Unable to Open the Tailgate

If you cannot open the tailgate or power tailgate, use the following procedure.



- **1.** Use a flat-tip screwdriver and remove the cover on the back of the tailgate.
 - Wrap the flat-tip screwdriver with a cloth to prevent scratches.

Models with power tailgate


2. To open the tailgate, push the tailgate while pushing the lever to the right.

What to Do If Unable to Open the Tailgate


Following up:

After taking these steps, contact a dealer to have the vehicle checked.

When you open the tailgate from inside, make sure there is enough space around the tailgate, and it does not hit anyone or any object.



Handling the Unexpected





Models without power tailgate

2. To open the tailgate, push the tailgate while pushing the lever to the right with the flat-tip screwdriver.

What to Do When Unable to Close the Power Sliding Doors

If either power sliding door does not latch when closed, use the following procedure.





- **1.** Set the sliding door main switch in the OFF position.
 - Switching between Manual and Automatic Operations P. 156
- **2.** Push front edge of the cover on hand pocket of the power sliding door to pop it out, and remove it as shown in the image.
- **3.** Pull the rear latch reset cable (yellow) towards the front of the vehicle until it bottoms out (about 9/16 inch [15 mm]).
- **4.** Manually close the door and confirm latches engage.


What to Do When Unable to Close the Power Sliding Doors

After taking these steps, contact a dealer to have your vehicle checked.

Refueling

Refueling From a Portable Fuel Container

If you have run out of fuel and need to refuel your vehicle from a portable fuel container, use the funnel provided with your vehicle.



- 1. Turn off the engine.
- **3.** Remove the cover on the right side panel of the cargo area.

4. Pick up the funnel from the cover (as shown).

Types of Tools P. 572

5.


- **5.** Place the end of the funnel on the lower part of filler opening, then insert it slowly and fully.
 - Make sure that the end of the funnel goes down along with the filler pipe.

Refueling From a Portable Fuel Container

Fuel is highly flammable and explosive. You can be burned or seriously injured when handling fuel.

- Stop the engine, and keep heat, sparks, and flames away.
- Handle fuel only outdoors.
- Wipe up spills immediately.

Funnel



- **6.** Fill the tank with fuel from the portable fuel container.
 - Pour fuel carefully so you do not spill any.
- 7. Remove the funnel from the filler neck.
- Wipe up any fuel from the funnel before storing it.
- 8. Shut the fuel fill door by hand.

➢Refueling From a Portable Fuel Container

NOTICE

Do not insert the nozzle of a portable fuel container or any funnel other than the one provided with your vehicle. Doing so can damage the fuel system.

Do not try to pry open or push open the sealed fuel tank with foreign objects. This can damage the fuel system and its seal.

Make sure the fuel in the portable fuel container is gasoline before you refuel.

The following features are part of HondaLink[®].

Refer to the following pages for details on how to use HondaLink®.

HondaLink® P. 301

In Case of Emergency

Automatic collision notification



If your vehicle's airbags deploy or if the unit detects that the vehicle is severely impacted, your vehicle automatically will attempt to connect to the HondaLink operator. If connected, information about your vehicle, its location, and its condition can be sent to the operator*1; you also can speak to the operator when connected.

IMPORTANT: For vehicles equipped with HondaLink Assist, owner activation constitutes authorization for Honda to collect information from your vehicle needed to provide the service, and agreement to the Terms of Use at: U.S.: https://mygarage.honda.com/s/hondalink-marketing

Canada: https://www.honda.ca/en/hondalink/terms (English)

https://www.honda.ca/fr/hondalink/terms (French)

In a crash, HondaLink Assist will attempt to notify emergency services but NEITHER HONDA NOR ITS SERVICE PROVIDERS GUARANTEE THAT SUCH NOTIFICATION WILL OCCUR.

Honda reserves the right to terminate HondaLink Assist services at any time or for any reason, and in the future may not be able to provide services due to changes in, or obsolescence of, technology integral to the service or changes in governmental regulation.

*1: Depending on your phone and adequate cellular coverage, your vehicle's location may not be sent to the operator.

➢In Case of Emergency

Your vehicle may not be able to connect to the operator if the battery level is low, the line is disconnected, or you do not have adequate cellular coverage.

You cannot use this emergency service when:

- You travel outside the HondaLink service coverage areas.
- There is a problem with the connecting devices, such as the microphones, speakers, or the unit itself.

You cannot operate other phone-related functions using the screen while talking to the operator. Select **Hang Up** to terminate the connection to your vehicle.

Mutomatic collision notification

If the unit fails to connect to the operator, it repeatedly tries until it succeeds.

To enable notification



- 1. Go to the phone settings screen. ▶ Phone settings screen P. 373
- 2. Select HondaLink Assist.
- 3. Select Yes or No.

➢To enable notification

- Setting options:
- Yes: Notification is available.
- No: Disable the feature.

This page intentionally left blank.

Information

This chapter includes your vehicle's specifications, locations of identification numbers, and other information required by regulation.

Specifications
Identification Numbers
Vehicle Identification Number (VIN), Engine
Number, and Transmission Number618
Devices that Emit Radio Waves 619
Reporting Safety Defects
Emissions Testing
Testing of Readiness Codes
Warranty Coverages 623
Authorized Manuals
Customer Service Information 627
Open Source License 628

Vehicle Specifications

Odyssey
2
3
3
8
See the certification label on the driver's doorjamb
See the certification label on the driver's doorjamb
See the certification label on the driver's doorjamb
1
U.S.: 8,565 lbs (3,885 kg) Canada: 3,885 kg

Air Conditioning

Refrigerant Type	HFO-1234yf (R-1234yf)
Charge Quantity	20.3 - 22.0 oz (575 - 625 g)
Lubricant Type	ND-OIL14 (POE)
Quantity	7.3 - 8.2 cu-in (120 - 135 cm ³)

Engine Specifications

Displacement	212 cu-in	(3,471 cm ³)
Spark Plugs	NGK	DILZKR7B11G
Fuel		
Fuel:	Unleaded	gasoline, pump octane number
Туре	87 or high	her
Fuel Tank Capacity	19.5 US g	al (73.8 L)

Washer Fluid

Tank Capacity	U.S.: 2.6 US qt (2.5 L)
	Canada: 4.8 US qt (4.5 L)

Light Bulbs

Light Bulbs	
Headlights (Low Beam)	LED
Headlights (High Beam)	LED
Fog Lights	LED
Front Turn Signal Lights	28/8W (Amber)
Front Side Marker Lights	3CP
Parking/Daytime Running Lights	LED
Side Turn Signal Lights (on Door Mirrors)	LED
Brake Lights	21W
Rear Side Marker/Taillights	LED
Rear Turn Signal Lights	21W
Back-Up Lights	21W
Taillights	LED
High-Mount Brake Light	LED
Rear License Plate Light	LED
Interior Lights	
Front Map Lights	5W
Rear Map Lights	5W
Ambient Light	LED
Cargo Area Light	8W
Vanity Mirror Lights	1.4W
Door Courtesy Lights	3.8W (2CP)
Glove Box Light	1.4W
Foot Lights*	LED
Console Compartmen Light	^t 1.4W
Door Inner Handle Lights*	LED
Door Tray Ambient Lights*	LED
Pass Through Light*	LED

Brake Fluid	
Specified	Honda Heavy Duty Brake Fluid DOT 3
-	

Automatic Transmission Fluid

Specified	Honda ATF-Type 2	

Engine Oi	I		
Recommended	·Honda Genuine Motor Oil 0W-20 ·API service SN or higher grade 0W-20		
	Change	5.4 US qt (5.1 L)	
Capacity	Change including filter	5.7 US qt (5.4 L)	

Engine Coolant

Specified	Honda Long-Life Antifreeze/Coolant Type2
Ratio	50/50 with distilled water
Capacity	1.70 US gal (6.43 L) (change including the remaining 0.18 US gal (0.68 L) in the reserve tank)

Tire


Regular	Size*1	235/60R18 103H
		235/55R19 101H
Negulai	Pressure	35 (240 [2.4])* ²
	psi (kPa [kgf/cm ²])	36 (250 [2.5])*3
Compact Size	Size	T135/80D17 103M
Spare	Pressure psi (kPa [kgf/cm ²])	60 (420 [4.2])
	Regular	18 x 7 1/2J*2
Wheel Size	Negulai	19 x 7 1/2J*3
	Compact Spare	17 x 4T
**		2 1 1 2 1 1 1

*1: Original tire size is mentioned on the tire information label on the driver's doorjamb.
*2: Models with 235/60R18 tires
*3: Models with 235/55R19 tires


Identification Numbers

Vehicle Identification Number (VIN), Engine Number, and Transmission Number

Your vehicle has a 17-digit vehicle identification number (VIN) used to register your vehicle for warranty purposes, and for licensing and insuring your vehicle. The locations of your vehicle's VIN, engine number, and transmission number are shown as follows.

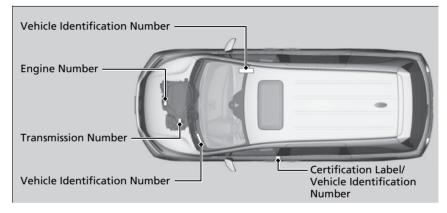

Vehicle Identification Number (VIN), Engine Number, and Transmission Number



The interior vehicle identification number (VIN) is located under the cover.

Each radio frequency device installed in the vehicle conforms to the requirements and standards of the regulation listed below:

As required by the FCC:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

In the U.S.

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying American Honda Motor Co., Inc.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or American Honda Motor Co., Inc.

To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-888-275-9171); go to *http://www.safercar.gov*; or write to: Administrator, NHTSA, 1200 New Jersey Avenue, SE., Washington, DC 20590. You can also obtain other information about motor vehicle safety from *http:// www.safercar.gov*.

In Canada

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform Honda Canada Inc. and you may also inform Transport Canada.

If Transport Canada receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may lead to a recall and remedy campaign. However, Transport Canada cannot become involved in individual problems between you, your dealer, or Honda Canada Inc.

To contact Transport Canada's Defect Investigations and Recalls Division, you may call 1-800-333-0510. For more information on reporting safety defects or about motor vehicle safety, go to *http://www.tc.gc.ca/ roadsafety*.

Testing of Readiness Codes

Your vehicle has readiness code as part of the onboard self diagnostic system. Some states use these codes for testing to verify whether your vehicle's emissions components are working properly.

The codes may not be read properly if testing is performed just after the battery has gone dead or been disconnected.

To check if they are set, set the power mode to ON, without starting the engine. The malfunction indicator lamp will come on for several seconds. If it then goes off, the readiness codes are set. If it blinks five times, the readiness codes are not set.

If you are required to have your vehicle tested before the readiness codes are ready, prepare the vehicle for retesting by doing the following:

- **1.** Fill the gas tank to approximately 3/4 full.
- 2. Park the vehicle and leave the engine off for 6 hours or more.
- 3. Make sure the ambient temperature is between 40°F and 95°F (4°C and 35°C).
- **4.** Start the engine without touching the accelerator pedal, and let it idle for 20 seconds.
- **5.** Keep the vehicle in **P**. Increase the engine speed to 2,000 rpm, and hold it there for about 3 minutes.
- 6. Let the engine idle with your foot off the accelerator for 20 seconds.

➢Testing of Readiness Codes

The readiness codes are erased when the battery is disconnected, and set again only after several days of driving under a variety of conditions.

If a testing facility determines that the readiness codes are not set, you may be requested to return at a later date to complete the test.

If the testing facility determines the readiness codes are still not set, see a dealer.

- **7.** Select a nearby, lightly traveled major highway where you can maintain a speed of 50 to 60 mph (80 to 97 km/h) for at least 20 minutes. Do not use cruise control and perform the following when traffic allows. When stopped before entering the highway, use paddle shifters. During acceleration up to speed, target 5,500 to 6,500 engine rpm continuously for at least 10 seconds. Then shift to **D** range and drive for 90 seconds without moving the accelerator pedal. (Vehicle speed may vary slightly; this is okay.) If you cannot do this for a continuous 90 seconds because of traffic conditions, drive for at least 30 seconds, then repeat it two more times (for a total of 90 seconds).
- **8.** Drive in city or suburban traffic for at least 10 minutes. When traffic conditions allow, let the vehicle coast for several seconds without using the accelerator pedal or the brake pedal.
- 9. Park the vehicle and leave the engine off for 30 minutes.

U.S. Owners

Your new vehicle is covered by these warranties:

New Vehicle Limited Warranty – covers your new vehicle, except for the emissions control systems and accessories, against defects in materials and workmanship.

Emissions Control Systems Defects Warranty and Emissions Performance

Warranty – these two warranties cover your vehicle's emissions control systems. Time, mileage, and coverage are conditional. Please read your warranty booklet for exact information.

Seat Belt Limited Warranty – a seat belt that fails to function properly is covered by a limited warranty. Please read your warranty booklet for details.

Rust Perforation Limited Warranty – all exterior body panels are covered against rusting from the inside out for the specified time period, regardless of mileage.

Accessory Limited Warranty – Honda accessories are covered under this warranty. Time and mileage limits depend on the type of accessory and other factors. Please read your warranty booklet for details.

Replacement Parts Limited Warranty – covers all Honda replacement parts against defects in materials and workmanship.

Replacement Battery Limited Warranty – provides prorated coverage for a replacement battery purchased from your dealer.

Replacement Muffler Lifetime Limited Warranty – provides coverage for as long as the purchaser of the muffler owns the vehicle.

Restrictions and exclusions apply to all these warranties. Please read the Honda warranty information booklet that came with your vehicle for precise information on warranty coverages. Your vehicle's original tires are covered by their manufacturer. Tire warranty information is in a separate booklet.

Statement on Warranty Coverage for Aftermarket and Recycled Parts

The Magnuson-Moss Warranty Act, 15 U.S.C. s.2301 et seq., makes it illegal for motor vehicle manufacturers to void a motor vehicle warranty or deny warranty coverage solely because an aftermarket or recycled part has been used to repair the vehicle or someone other than the authorized service provider performed service on the vehicle. This provision does not apply to a new motor vehicle purchased solely for commercial or industrial use.

Under federal law, a manufacturer may deny warranty coverage and charge for repairs to a vehicle if it is discovered that an aftermarket or recycled part installed on the vehicle is defective or was installed incorrectly and caused damage to another part of the vehicle otherwise covered under warranty. The Federal Trade Commission requires that a manufacturer demonstrate that an aftermarket or recycled part or service performed by a person other than an authorized service provider caused damage to another part of the vehicle otherwise covered under warranty before denying warranty coverage. Additionally, federal law allows a manufacturer to void a motor vehicle warranty or deny warranty coverage if the manufacturer provides the article or service to consumers free of charge under the warranty or the manufacturer has secured a waiver from the Federal Trade Commission.

Canadian Owners

Please refer to the warranty manual that came with your vehicle.

EPA Contact Information

An owner may obtain further information concerning emission warranties or report violations of the terms of the emission warranties by contacting:

Director, Light-Duty Vehicle Center, U.S. Environmental Protection Agency, Attention: Warranty Claim 2000 Traverwood Drive, Ann Arbor, MI 48105; complianceinfo@epa.gov

Service Express

For electronic copies of service publications, you can purchase a subscription to Service Express. Visit *https://techinfo.honda.com* for pricing and options.

For U.S. Owners

Manuals can be purchased from Helm Incorporated. You can order a manual by phone at 1 (800) 782-4356 (credit card orders only), or online at *www.helminc.com*.

For Canadian Owners

Please contact a dealer to order any manuals that you may require.

Honda dealership personnel are trained professionals able to deal with any problems you may encounter with your vehicle. If, however, you are faced with a problem that they cannot resolve to your satisfaction, contact Honda Customer Service.

U.S. Owners

American Honda Motor Co., Inc. Honda Automobile Customer Service Mail Stop CHI-5 1919 Torrance Blvd. Torrance, CA 90501-2746 Tel: 1 (800) 999-1009

In Puerto Rico and the U.S. Virgin Islands

Bella International P.O. Box 190816 San Juan, PR 00919-0816 Tel: 1 (787) 620-7546

Canadian Owners

Honda Canada Inc. Customer Relations 180 Honda Boulevard Markham, ON L6C 0H9 Tel: 1-888-9-HONDA-9 Fax: 1-877-939-0909 E-mail: Honda_cr@ch.honda.com

In Guam Triple J Autogroup 157 S. Marine Corps Drive Tamuning, GU 96913 Tel: (671) 648-2277

In Saipan, Commonwealth of the Northern Mariana Islands

Joeten Motor Company, Inc. P.O. Box 500680 Saipan, MP 96950 Tel: (670) 234-5562

Customer Service Information

When you call or write, please give us the following information:

• Vehicle Identification Number

Vehicle Identification Number (VIN), Engine Number, and Transmission Number P. 618

- Date of purchase
- Odometer reading of your vehicle
- Your name, address, and telephone number
- A detailed description of the problem
- Name of the dealer who sold the vehicle to you

Meter Open Source License

The software embedded in this product includes open source software. Refer to the following website for details regarding the open source software. https://www.nippon-seiki.co.jp/global/business_ic_meter/#contents01_pc

TCU Open Source License*

Free/Open Source Software Information This product contains Free/Open Source Software(FOSS). The license information and/or the source code of such FOSS can be found at the following URL. https://www.denso.com/global/en/opensource/tcu/honda/

Α

AAC	295
ABS (Anti-lock Brake System)	497
AC Power Outlet	223
Accessories and Modifications	569
Accessory Power Sockets	221
Adaptive Cruise Control (ACC) with	
Low Speed Follow 106,	456
Additives	
Coolant	535
Engine Oil	530
Washer	539
Additives, Engine Oil	530
Adjusting	
Armrest	209
Front and Second Row Outer and Third Ro	w
Outer Head Restraints Positions	206
Front Seats	193
Mirrors	190
Second Row Seats	196
Sound	271
Steering Wheel	189
Third Row Seats	201
Agile Handling Assist	429
Air Conditioning System	
(Climate Control System)	235
Defrosting the Windshield and	
Windows	237
Dust and Pollen Filter	563
Sensors	241
Using Automatic Climate Control	235

Air Pressure	552, 617
Airbags	53
Advanced Airbags	59
Airbag Care	70
Event Data Recorder	0
Front Airbags (SRS)	56
Indicator	67, 99
Knee Airbags	61
Passenger Airbag Off Indicator	68
Sensors	53
Side Airbags	64
Side Curtain Airbags	66
AM/FM Radio	277
Android Auto [™]	318
Anti-lock Brake System (ABS)	497
Indicator	99
Apple CarPlay	311
Armrest	209
AT&T Hotspot	309
Audio	118
Audio Remote Controls	248
Audio System	244, 251
Adjusting the Sound	271
Android Auto [™]	318
Audio/Information Screen	253
Display Setup	272
Error Messages	325
General Information	326
Home Screen	259
How to Update	265
How to Update Wirelessly	269

How to Update with a USB Device	270
Limitations for Manual Operation 273,	372
MP3/WMA/AAC/FLAC/WAV	295
Reactivating	247
Recommended Devices	327
Remote Controls	248
Security Code	247
Selecting an Audio Source	273
Start Up	252
Status Area	264
System Updates	265
System Updates Settings	266
Theft Protection	247
USB Flash Drives	327
USB Ports	245
Wallpaper Setup	257
Audio/Information Screen	253
Authorized Manuals	626
Auto Door Locking/Unlocking	141
Auto High-Beam	179
Indicator	101
Auto Idle Stop Indicator (Green)	104
Auto Idle Stop OFF Indicator	104
Auto Idle Stop Suspend Indicator	105
Auto Idle Stop System Indicator	
(Amber)	104
Automatic Brake Hold	494
Indicator	494
Automatic Brake Hold System	
Indicator	494

Automatic Transmission	411
Creeping	411
Fluid	537
Kickdown	411
Shift Operation	414
Shifting	412
Auxiliary Console Panel	348
Average Fuel Economy	116
Average Speed	118

В

Dettern: ECO
Battery 560
Charging System Indicator
If the Battery Is Dead 587
Maintenance (Checking the Battery) 560
Maintenance (Replacing) 562
Belts (Seat)
Beverage Holders
Blind Spot Information System 434
Bluetooth [®] Audio 298
Bluetooth [®] HandsFreeLink [®]
Booster Seats (For Children)
Brake System
Anti-lock Brake System (ABS) 497
Automatic Brake Hold 494
Brake Assist System 498
Fluid 538
Foot Brake 493
Indicator (Amber)
Indicator (Red) 94, 95, 593, 594

Parking Brake	490	Chil
Built-in Key	126	Bo
Bulb Replacement	540	C
Back-Up Lights/Taillights	545	C
Brake, Rear Turn Signal Lights, and Rear S	ide	In
Marker/Taillights	543	5
Fog Lights	540	La
Front Side Marker Lights	542	Re
Front Turn Signal Lights	541	Se
Headlights	540	U
High-Mount Brake Light	546	Chil
Parking/Daytime Running Lights	540	Clea
Rear License Plate Light	546	Clea
Side Turn Signal/Emergency Indicator		Clin
Lights		D
Bulb Specifications	616	١

С

CabinTalk [®]	
CabinWatch®	388
Car Wash Mode	416
Carbon Monoxide Gas	89
Cargo Hooks	218
Carrying Cargo	393, 395
Center Pocket	212
Certification Label	618
Changing Bulbs	540
Charging System Indicator	97, 592
Child Safety	71
Childproof Door Locks	140

Child Seat	. 71
Booster Seats	
Child Seat for Infants	. 73
Child Seat for Small Children	. 74
Installing a Child Seat with a Lap/Shoulder	
Seat Belt	. 81
Larger Children	
Rear-facing Child Seat	. 73
Selecting a Child Seat	. 75
Using a Tether	. 83
Childproof Door Locks	140
Cleaning the Exterior	566
Cleaning the Interior	564
Climate Control System	235
Defrosting the Windshield and	
Windows	237
Dust and Pollen Filter	563
Sensors	241
Using Automatic Climate Control	235
Clock	124
Coat Hooks	217
Compact Spare Tire 573,	617
Console Box	213
Console Compartment	214
Controls	123
Coolant (Engine)	535
Adding to the Radiator	536
Adding to the Reserve Tank	535
Overheating	589
Creeping (Automatic Transmission)	411
Cup Holders	215

Customer Service Information	627
Customized Features	354

D

Daytime Running Lights	178
Dead Battery	587
Defaulting All the Settings	369
Defrosting the Windshield and	
Windows	237
Detachable Anchor	. 49
Devices that Emit Radio Waves	619
Dimming	
Headlights	173
Rearview Mirror	190
Dipstick (Engine Oil)	531
Display Setup	272
Door Mirrors	191
Doors	125
Auto Door Locking	141
Auto Door Unlocking	141
Door and Tailgate Open Message	. 39
Keys	125
Locking/Unlocking the Doors from	
the Inside	137
Locking/Unlocking the Doors from	
the Outside	128
DOT Tire Quality Grading	554
Driver Information Interface	113
Switching the Display	113

Driving 391	
Automatic Transmission 411	
Braking 490)
Shifting Gear 412)
Starting the Engine 404	ł
Driving Position Memory System	1
Dust and Pollen Filter 563	3

Ε

Eco Assist® System15ECON Mode Indicator103Elapsed Time118Electric Power Steering (EPS) System
Indicator 99, 595
Electronic Stability Control (ESC)
Emergency Engine Stop 586
Emergency Towing 605
Emissions Testing (Readiness Codes) 621
Engine 618
Coolant 535
If the Battery Is Dead 587
Oil 530
Starting 404
Switch Buzzer 171, 172
Engine Coolant 535
Adding to the Radiator 536
Adding to the Reserve Tank 535
Overheating 589
Engine Oil 530
Adding 532

Checking 53	31
Displaying Oil Life 52	20
Engine oil pressure low Warning 59) 1
Recommended Engine Oil 53	30
Engine oil pressure low Warning 59) 1
ENGINE START/STOP Button 17	70
Exhaust Gas Hazard (Carbon Monoxide) 8	39
Exterior Care (Cleaning) 56	56
Exterior Mirrors 19	€1

F

Features Filters	243
	562
Dust and Pollen	563
Oil	533
FLAC	295
Flat Tire	573
Floor Mats	565
Fluids	
Automatic Transmission	537
Brake	538
Engine Coolant	535
Windshield Washer	539
FM/AM Radio	277
Fog Light Indicator	101
Folding Down the Rear Seats 197,	202
Foot Brake	493
Front Airbags (SRS)	. 56
Front Seat Heaters	

Index

Front Seat Heaters and Seat	
Ventilation	230
Front Seats	193
Adjusting	193
Fuel	27, 510
Average Fuel Economy	116
Economy	513
Gauge	110
Instant Fuel Economy	116
Low Fuel Indicator (Amber)	
Range	116
Recommendation	27, 510
Refueling	27, 510
Fuel Economy	513
Fuel Fill Door	27, 511
Fuses	598
Inspecting and Changing	604
Locations	. 598, 600, 603

G

Gasoline (Fuel)

Average Fuel Economy 1	116
Economy	513
Gauge 1	110
Information 5	510
Instant Fuel Economy 1	116
Low Fuel Indicator (Amber)	98
Recommendation 27, 5	510
Refueling 27, 5	510
Gauge Display Settings 1	122

Gauges	110
Gear Position Indicator	97, 414
Glass (care)	564, 568
Glove Box	212
Grocery Bag Hooks	219

Η

Handling the Unexpected	571
HandsFreeLink [®] (HFL)	370
Automatic Import of Cellular Phonebook	and
Call History	380
Automatic Transferring	379
Favorite Contacts	381
HFL Buttons	370
HFL Menus	373
HFL Status Display	372
In Case of Emergency	612
Limitations for Manual Operation	372
Making a Call	383
Options During a Call	386
Phone Setup	375
Receiving a Call	385
Ringtone	379
Hazard Warning Button	8
HDMI [™] Port	348
Head Restraints	206
Headlights	173
Aiming	540
Auto High-Beam	179
Dimming	173

Operating	173
Heated Steering Wheel	228
Heated Windshield Button	186
Heaters (Seat) 229,	230
HFL (HandsFreeLink [®])	370
High Beam Indicator	101
HomeLink [®] Universal Transceiver	232
Honda App License Agreement	328
Honda Sensing [®] 28,	437
HondaLink [®]	301
How to Connect Headphones	353

Identification Numbers

L

Engine and Transmission	618
Vehicle Identification	618
Immobilizer System	162
Indicator	102
In Case of Emergency or Vehicle	
Trouble	612
Indicators	. 92
Adaptive Cruise Control (ACC) with	
Low Speed Follow (Amber)	106
Adaptive Cruise Control (ACC) with	
Low Speed Follow (White/Green)	106
Anti-lock Brake System (ABS)	. 99
Auto High-Beam	101
Auto Idle Stop (Green)	104
Auto Idle Stop OFF	104
Auto Idle Stop Suspend	105

Auto Idle Stop System (Amber)104Automatic Brake Hold96, 494Automatic Brake Hold System96, 494Charging System97, 592Cruise Mode (White/Green)106
ECON Mode 103
Electric Power Steering (EPS)
System
Engine oil pressure low Warning 591
Fog Light 101
Gear Position 97, 414
High Beam 101
Immobilizer System 102
Lane Keeping Assist System (LKAS)
(Amber) 106
Lane Keeping Assist System (LKAS)
(White/Green) 106
Lights On 101
Low Fuel (Amber)
Low Temperature
Low Tire Pressure/TPMS 100, 430, 596
M (sequential mode)/Sequential Mode Gear
Selection
Malfunction Indicator Lamp 97, 592
NORMAL Mode 103
Parking Brake and Brake System
(Amber)
Parking Brake and Brake System
(Red)
Safety Support (Amber) 107
Safety Support (Green/Gray) 109

Seat Belt Reminder42, 98Security System Alarm102SNOW Mode103Supplemental Restraint System67, 99System Message103
Transmission System 98, 597
Turn Signal and Hazard Warning 101
Vehicle Stability Assist [™] (VSA®) OFF 100
Vehicle Stability Assist [™] (VSA®)
System 100, 427
VSA® OFF 428
Information
Instant Fuel Economy 116
Instrument Panel
Integrated Sunshades
Interior Lights
Interior Rearview Mirror 190

J

Jack (Wheel Nut Wrench)	576
Jump Starting	587

Κ

Key Number Tag	126
Keys	125
Number Tag	126
Rear Door Won't Open	140
Remote Transmitter	132
Types and Functions	125

Kickdown (Automatic Transmission)	411
Knee Airbags	61

L

Lane Keeping Assist System (LKAS).	472
LATCH (Child Seats)	
Lights	173, 540
Bulb Replacement	540
Daytime Running Lights	178
Fog Light	177
High Beam Indicator	
Interior	210
Light Switches	
Lights On Indicator	101
Parking Lights	173
Load Limits	395
Locking/Unlocking	125
Auto Door Locking/Unlocking	141
Childproof Door Locks	140
From Inside	137
From Outside	128
Keys	125
Using a Key	133
Low Battery Charge	592
Low Fuel Indicator (Amber)	
Low Keyless Remote Signal Strengt	h 127
Low Temperature Indicator	99
Lower Anchors	
Luggage (Maximum Load Limit)	395

Μ	

Magic Slide [®] 2nd-Row Seats	200
Maintenance	515
Battery	560
Brake Fluid	538
Cleaning	564
Climate Control System	563
Coolant	535
Maintenance Minder [™]	519
Oil	531
Precautions	516
Radiator	536
Remote Transmitter	562
Replacing Light Bulbs	540
Safety	517
Service Items	523
Tires	551
Transmission Fluid	537
Under the Hood	527
Malfunction Indicator Lamp	97, 592
Map Light Switches	211
Maximum Load Limit	395
Meters, Gauges	110
Mirrors	190
Adjusting	190
Door	191
Exterior	191
Interior Rearview	190
Modifications (and Accessories)	569
Moonroof	168
MP3	295

Ν

Navigation	119
No Content	121
NORMAL Mode Indicator	103
Numbers (Identification)	618

0

Odometer 111
Oil (Engine)
Adding 532
Checking 531
Displaying Oil Life 520
Engine oil pressure low Warning 591
Recommended Engine Oil 530
Viscosity 530
One-Motion 60/40 Split 3rd-Row Magic
Seat [®]
Open Source License
Open Source Licenses
Opening/Closing
Hood 528
Moonroof 168
Power Windows 165
Sliding Doors153
Tailgate 142
Outside Temperature Display 111
Overheating 589

Panic Mode 164
Parking 499
Parking Brake
Parking Brake and Brake System Indicator
(Amber) 96, 594
Parking Brake and Brake System Indicator
(Red)
Parking Lights 173
Parking Sensor System 500
Passenger Airbag Off Indicator
Passing Indicators 173
Phone 118
Playing Bluetooth® Audio 298
Power Sliding Doors 155
Unable to Close 609
Power Tailgate 145
Unable to Open 607
Power Windows 165
Precautions While Driving
Rain 410
Pregnant Women 51
Puncture (Tire) 573

R

Radiator	536
Radio (FM/AM)	277
Radio (SiriusXM®)	281
Radio Data System (RDS)	279
Range	116

	79 21
Button 1	85
Rear Entertainment System 3	48
Auxiliary Console Panel 3	48
HDMI [™] Port 3	48
How to Connect Headphones 3	53
Operating the System 3	50
Overhead Screen 3	49
Start-Up 3	50
Rear Seat Reminder 2	04
Rear Seats (Folding Down) 197, 2	.02
Rearview Mirror 1	
Refueling	10
Fuel Gauge 1	
Gasoline 27, 510, 6	
Low Fuel Indicator (Amber)	
Regulations 432, 554, 6	19
	32
Removing a Second Row Outer Seat 1	99
Removing the Second Row Center	
Seat 1	98
Replacement	
Battery 5	62
50.55	40
	48
Fuses 598, 600, 6	
Rear Wiper Blade Rubber 5	49
Tires 5	57

Reporting Safety Defects	620
Resetting a Trip Meter	116

S

Safe Driving	35
Safety Check	39
Safety Labels	90
Safety Message	
Safety Support	120
Seat Belts	
Adjusting the Shoulder Anchor	
Automatic Seat Belt Tensioners	
Checking	52
Detachable Anchor	
Fastening	
Installing a Child Seat with a Lap/Sh	
Seat Belt	
Pregnant Women	
Reminder	
Warning Indicator	
Seat Heaters	
Seats	
Adjusting	
Front Seats	
Seat Heaters	
Second Row Seats	
Third Row Seats	
Second Row Seats	
Adjusting	196
······································	

Security System	162
Immobilizer System Indicator	102
Security System Alarm Indicator	102
Select Buttons	25, 412
Operation	414
Selecting a Child Seat	75
Shifting (Transmission)	412
Shoulder Anchor	48
Side Airbags	64
Side Curtain Airbags	66
SiriusXM [®] Radio	281
Sliding Doors	153
Power Sliding Doors	155
Smart Shortcuts	305
SNOW Mode Indicator	103
Snow Tires	559
Spare Tire	573, 617
Spark Plugs	616
Specifications	616
Specified Fuel 2	7, 510, 616
Speed/Distance Units	121
Speedometer	110
SRS Airbags (Airbags)	56
Starting the Engine	404
Does Not Start	582
If the Battery Is Dead	587
Steering Wheel	
Adjusting	189
Stopping	499
Summer Tires	559
Sunglasses Holder	220

Index

Supplemental Restraint System (SI	RS) 56	Tools
Switches		Towing a
(Around the Steering Wheel)	0 0 170	Equipmo

(Around the Steering Wheel)	0
System Message Indicator 10	3
System Updates 26	5

Т

Tachometer	110
Tailgate	142
Unable to Open	607
Temperature	
Outside Temperature Display	111
Temperature Sensor	111, 241
Third Row Seat Access	197
Time (Adjusting)	124
Tire Pressure Monitoring Syste	m (TPMS)
Indicator	. 100, 430, 596
Tires	551
Air Pressure	
Checking and Maintaining	551
Inspection	551
Labeling	552
Puncture (Flat Tire)	573
Regulations	554
Rotation	558
Spare Tire	573, 617
Summer	559
Tire Chains	559
Wear Indicators	556
Winter	559

56	Tools 572	
	Towing a Trailer 398	
3, 9, 170	Equipment and Accessories	
103	Load Limits	
265	Towing Your Vehicle 403	
	Emergency 605	
	TPMS (Tire Pressure Monitoring System)	
	Indicator 100, 430, 596	
110	Traffic Sign Recognition System 111, 482	
142	Transmission 412	
607	Automatic 411	,
	Fluid 537	,
111	Gear Position Indicator	,
11, 241	Number 618	
197	Transmission System	
124	Indicator 98, 597	
/IS)	Trip Computer 255	,
130, 596	Trip Meter 116	,
551	Troubleshooting 571	
52, 617	Blown Fuse 598, 600, 603	
551	Brake Pedal Vibrates 32	
551	Buzzer Sounds When Opening Door	
552	Emergency Towing 605	
573	Engine Won't Start 582	
554	Noise When Braking 34	
558	Overheating 589	
573, 617	Puncture/Flat Tire 573	,
559	Sliding Door Won't Open 32, 140	
559	Warning Indicators 92, 591	,
556	Turn Signals	
559	Indicators (Instrument Panel) 101	,

U

Unlocking the Doors	128
Unlocking the Front Doors from	
the Inside	137
USB Flash Drives 295,	327
USB Ports	245
Using the Keyless Access System	128

V

Vanity Mirrors	11
Vehicle Identification Number	618
Vehicle Stability Assist [™] (VSA®).	427
Off Button	428
OFF Indicator	100, 428
System Indicator	100, 427
Viscosity (Oil)	530, 617
Voice Control Operation	274
Audio Commands	275
General Commands	275
List Commands	276
Navigation Commands	276
Phone Commands	275
Standard Commands	276
Voice Portal Screen	275
Voice Recognition	274
VSA [®] (Vehicle Stability Assist [™]).	427

W

Wallpaper 257	257
---------------	-----

Warning Indicator On/Blinking	591
Warning Labels	. 90
Warnings	122
Warranties (Warranty Manual provided	
separately)	623
Watts	616
WAV	295
Wear Indicators (Tire)	556
Wheel Nut Wrench (Jack Handle)	576
Wi-Fi Connection	308
Window Washers	182
Adding/Refilling Fluid	539
Switch	182
Windows (Opening and Closing)	165
Windshield	182
Cleaning 564,	568
Defrosting/Defogging	237
Washer Fluid	539
Wiper Blades	547
Wipers and Washers	182
Winter Tires	
Snow Tires	559
Tire Chains	559
Wipers and Washers	182
Checking and Replacing the Front Wiper	
Blades	547
Checking and Replacing the Rear Wiper	
Blade	549
Wireless Charger	224
WMA	295
Worn Tires	551



MYGARAGE.HONDA.COM (U.S.A.) HONDA.CA (CANADA)